



Specifications

Models

Model name (No.)	Max. sampling rate	Freq. bandwidth	Max. record length
DL9140 (701310)	5 GS/s	1 GHz	2.5 MW
DL9140L (701311)	5 GS/s	1 GHz	6.25 MW
DL9240 (701312)	10 GS/s	1.5 GHz	2.5 MW
DL9240L (701313)	10 GS/s	1.5 GHz	6.25 MW

Basic Specifications

Input channels	4 (CH1 to CH4)		
Input coupling	AC, DC, GND, DC50Ω		
Input impedance	1 MΩ ±1.0% approx. 20 pF (when using PB500 probe, 10 MΩ ±2.0%, approx. 14 pF) 50 Ω ±1.5%		
Voltage axis sensitivity ranges	For 1 MΩ input: 2 mV/div to 5 V/div (steps of 1-2-5) For 50 Ω input: 2 mV/div to 500 mV/div (steps of 1-2-5)		
Maximum input voltage	For 1 MΩ input: 150 Vrms CAT I For 50 Ω input: 5 Vrms or less and 10 Vpeak or less		
DC offset max. setting range	For 1 MΩ input		
(When probe attenuation set to 1:1)	2 mV/div to 50 mV/div: ±1 V 100 mV/div to 500 mV/div: ±10 V 1 V/div to 5 V/div: ±100 V		
	For 50 Ω input		
	2 mV/div to 50 mV/div: ±1 V 100 mV/div to 500 mV/div: ±5 V		
Vertical (voltage) axis sensitivity			
DC accuracy ¹	For 1 MΩ input: ±(1.5% of 8 div + offset voltage accuracy) For 50 Ω input: ±(1.5% of 8 div + offset voltage accuracy)		
Offset voltage axis accuracy ¹	2 mV/div to 50 mV/div: ±(1% of setting + 0.2 mV) 100 mV/div to 500 mV/div: ±(1% of setting + 2 mV) 1 V/div to 5 V/div: ±(1% of setting + 20 mV)		
Voltage standing-wave ratio (VSWR)	1.5 or less within frequency bandwidth		
Frequency characteristics ^{1, 2}	For 50 Ω input DL9140/DL9140L DL9240/DL9240L		
(Attenuation point of -3 dB when inputting a sinewave of amplitude ±2 div or equivalent)	0.5 V/div to 10 mV/div: DC to 1 GHz DC to 1.5 GHz 5 mV/div: DC to 750 MHz DC to 1 GHz 2 mV/div: DC to 600 MHz DC to 750 MHz		
	For 1 MΩ input (from the probe tip when using the dedicated passive probe (PB500))		
	5 V/div to 10 mV/div: DC to 500 MHz DC to 500 MHz 5 mV/div to 2 mV/div: DC to 400 MHz DC to 400 MHz		
Residual noise level ³	0.4 mV rms or 0.05 div rms, whichever is larger (typical value ⁴)		
A/D conversion resolution	8-bit (25 LSB/div)		
	Maximum 13 bit (when in High-Res. mode)		
Bandwidth limit	For each channel, select FULL, 200 MHz, 20 MHz, 8 MHz, 4 MHz, 2 MHz, 1 MHz, 500 kHz, 250 kHz, 125 kHz, 62.5 kHz, 32 kHz, 16 kHz, 8 kHz. Limit implemented with analog (200 MHz, 20 MHz) and digital filters (IIR+ FIR).		
Max. sampling rate	DL9140/DL9140L DL9240/DL9240L		
Real time sampling mode			
Interleave mode ON:	5 GS/s	10 GS/s	
Interleave mode OFF:	2.5 GS/s	5 GS/s	
Repetitive sampling mode:	2.5 TS/s	2.5 TS/s	
Maximum record length	DL9140/DL9240	DL9140L/DL9240L	
	2.5 MW	6.25 MW	
Time axis setting range	500 ps/div to 50 s/div (steps of 1-2-5)		
Time base accuracy ¹	±0.001%		
Time axis measurement accuracy ¹	± (0.01% + 10 ps + 1 sample interval)		
Max. acquisition rate ⁵	When using 1.25 MW, 60 waveforms/sec/ch When using 12.5 kW, 9000 waveforms/sec/ch When using 2.5 kW, 25000 waveforms/sec/ch		
Min. dead time (N single) ⁵	400 ns or less		

Trigger Section

Trigger modes	Auto, Auto Level, Normal, Single, and N Single
Trigger source	
CH1 to CH4:	Signals applied to measurement input terminals ¹
LINE:	Connected commercial power signal (only available with Edge trigger)
EXT:	Signal input from EXT TRIG IN terminal
Trigger level range	
CH1 to CH4:	±4 divisions from the screen center
EXT:	±2 V (1:1), ±20 V (10:1 when used with a probe)
Trigger level setting resolution	
CH1 to CH4:	0.01 div
EXT:	5 mV (1:1), 50 mV (10:1 when used with a probe)
Window comparator	Channels CH1 to CH4, or individual channels
Center:	±4 divisions from the screen center
Width:	±4 divisions from Center
Trigger level accuracy	
CH1 to CH4 ¹	±(0.2 div + 10% of trigger level)
EXT ¹	±(50 mV + 10% of trigger level)

Trigger sensitivity (When hysteresis is small)

CH1 to CH4 ¹	DC to 1 GHz	1 divp-p
EXT ¹	DC to 100 MHz	100 mVp-p
Edge OR	DC to 50 MHz	1 divp-p
Trigger types		
Edge/State		
Edge:	Trigger occurs on the edge of a single trigger source.	
Edge (Qualified):	Trigger occurs on the edge of a single trigger source when Qualification condition is true.	
Edge OR:	Trigger occurs on the OR logic of the edge conditions set to multiple trigger sources.	
State:	Trigger occurs on ENTER/EXIT when the state condition is true.	
Width		
Pulse:	Trigger occurs on a width of a single trigger source.	
Pulse (Qualified):	Trigger occurs on a width of a single trigger source when Qualification condition is true.	
Pulse State:	Trigger occurs on a width when the state condition is true.	
Time width setting mode		
More than:	Trigger occurs upon change in condition when the condition remains true longer than time T1.	
Less than:	Trigger occurs upon change in condition when the condition remains true shorter than time T1.	
Between:	Trigger occurs upon change in condition when the condition remains true longer than time T1 and shorter than time T2.	
Out of Range:	Trigger occurs upon change in condition when the condition remains true shorter than time T1 and longer than time T2.	
Time out:	Trigger occurs when the condition is true for duration longer than time T1.	
Specified time (T1/T2):	1 ns to 10 s, 500 ps resolution	
Time accuracy:	±(0.2% of setting + 1 ns)	
Event Interval		
Event Cycle:	Trigger occurs when the event cycle is within the specified time range.	
Event Delay:	After Event 1 occurs, trigger occurs on 1st occurrence of Event 2 that satisfies the timing constrains. The trigger process is reset if Event 1 or Event 2 occurs before the timing constrains are satisfied.	
Event Sequence:	After Event 1 occurs, trigger occurs on 1st occurrence of Event 2 that satisfies the timing constrains. The trigger process is reset if Event 1 occurs before the timing constrains are satisfied.	
Time width setting mode:	Function identical to the time width setting mode for Width	
Specified time (T1/T2):	1.5 ns to 10 s, 500 ps resolution	
Time accuracy:	±(0.2% of setting + 1 ns)	
Event types:	Events can be selected from any but the following: Edge, Edge Qualified, State, Pulse, Pulse Qualified, Pulse State, I ² C, SPI, Serial, or TV, Edge OR.	
Enhanced		
TV:	Trigger occurs on video signals of various broadcasting system formats	
Mode:	NTSC, PAL, HDTV, USER	
Input CH:	CH1-CH4	
Sync Guard:	Hsync 60 to 90% (steps of 1%)	
Line:	5-1054 (NTSC), 2-1251 (PAL), 2-1251 (HDTV), 2-2048 (USER)	
Field:	1/2/X	
Frame Skip:	1/2/4/8	
I ² C:	Triggers on I ² C bus signals	
Mode:	NON ACK, Every Start, General Call, (Start byte/HS Mode), ADR&DATA	
SPI:	Triggers on SPI (serial peripheral interface) bus signals	
Mode:	3 wire, 4 wire	
Serial pattern:	Triggers on general purpose serial communication signals. Max. bit rate: 50 Mbps Max. bit length: 128 bits	

Display

Display	8.4-inch (21.3 cm) color TFT liquid crystal display
Display screen size	170.5 mm (width) × 127.9 mm (height)
Total number of pixels	1024 × 768 (XGA)
Waveform display resolution	800 × 640

Functions

Waveform Acquisition/Display Functions

Acquisition modes	Select from three acquisition modes: Normal, Envelope, and Average.
High resolution mode	Vertical resolution is increased to max. 13 bits.
Repetitive sampling mode	Allows switching between realtime and repetitive sampling in certain time axis settings.
Interpolate function	Interpolates actual sampled data by up to 1000 times (or

	up to 2000 times in High-Res. mode) and increases the time resolution (up to 2.5 TS/s)
Record length	
DL9140L/DL9240L:	2.5 kW, 62.5 kW, 12.5 kW, 25 kW, 62.5 kW, 125 kW, 250 kW, 625 kW, 1.25 MW, 2.5 MW, 6.25 MW
DL9140/DL9240:	2.5 kW, 62.5 kW, 12.5 kW, 25 kW, 62.5 kW, 125 kW, 250 kW, 625 kW, 1.25 MW, 2.5 MW
Accumulation	Accumulates waveforms on the display. Choose Count/Time and Inten/Color.
Snapshot	Retains the current displayed waveform on the screen.
SNAP Clear	Clears Snaped traces
ACCUM Clear	Clears accumulated traces
History Clear	Clears History traces

Vertical/Horizontal Axis Settings

Turn channels ON or OFF	Independently on channels CH1 to CH4
Input filter	Limits bandwidths independently on channels CH1 to CH4
Roll mode	Roll mode display is enabled when the trigger mode is set to Auto, Auto Level, or Single at the following time axis setting: 100 ms/div to 50 s/div

Analysis Functions

Search and Zoom function	Zooms the displayed waveform along the time (Horizontal Zoom) and voltage (Vertical Zoom) axes. Independent zooming factors can be applied to two zoom areas.
Voltage axis zoom factor:	1 to 10 times
Time axis zoom factor:	1 time to 1data/div
Auto scroll function:	Automatically scrolls the zoom window along the time axis
Search function:	Searches the currently displayed waveform for a specified portion occurring beyond a specified time, and displays the zoomed result on screen
Search types:	Edge, Edge Qualified, State, Pulse, Pulse Qualified, Pulse State, Serial Pattern, I ² C (optional), SPI (optional)
History memory/Single (N)	
Max data:	DL9140L/DL9240L: 2000 (2.5 kW), when using history 1600 (2.5 kW), when in N single mode DL9140/DL9240: 1000 (2.5 kW), when using history 800 (2.5 kW), when in N single mode
History search:	Search for and display waveforms from the history memory that meet specified conditions.
Search types:	Rect, WAVE, Polygon, Parameter (Measure/FFT/XY)
Replay:	Automatically replays history waveforms.
Display:	Selected acquisition (#) or Average (Avg)
Cursor measurements	The following five cursors can be selected: Vertical, Horizontal, VT, Marker, Serial
Automatic measurement of Waveform Parameters function	Performs automated measurement of the following waveform parameters.
Items unrelated to cycle which will be derived out of all data in the range.	MAX, MIN, HIGH, LOW, P-P, HIGH-LOW, +OVER, -OVER, RMS, MEAN, Sdev, IntegTY
Items related to cycle which will be derived out of all data in the range.	C.rms, C.mean, C.Sdev, C.IntegTY, (1/FREQ), FREQ, COUNT, BURST
Items which will be derived from the first encounter from the beginning of the specified range.	+WIDTH, -WIDTH, PERIOD, DUTY, RISE, FALL, DELAY
Telecom Test	Performs mask test and eye pattern measurement
Mask test items:	Wave Count, Wave Count%, Sample Point Count, Sample Point Count%
Eye pattern items:	Vtop, Vbase, σ top, σ base, Tcrossing1, Tcrossing2, σ crossing1, σ crossing2, Vcrossing, Crossing%, Eye Height, Eye Width, Q Factor, Jitter, Jitter6 σ , Duty Cycle Distortion, Duty Cycle Distortion%, Ext Rate, Ext Rate%, Ext Rate dB, Rise/Fall
Computation functions	Computes up to eight traces (CH1-CH4/M1-M4) +, -, *, INTEG, COUNT (EDGE), COUNT (ROTARY), Through, Delay, Moving Avg, LowPass, High Pass
Reference functions	Display and analysis (computation and cursors) on up to four traces (M1-M4) of the saved waveform data. Waveforms including history can also be loaded for history searches or replay. Various parameters can be changed (however waveforms are not affected by T/Div changes).
Action-on-trigger	Automatically measured waveform parameters and waveform zones are determined, and the selected action is carried out each time conditions are met.
Modes:	OFF, All Condition, (GO/NOGO Zone/Param), GO/NOGO Telecom Test)
Actions:	Buzzer, Print, Save, Mail
All condition:	After EXEC is pressed, the specified action is performed upon each acquisition
GO/NOGO zone:	Determines whether or not the acquired waveform passes through the specified area
Zone types:	RECT, Polygon, WAVE
GO/NOGO parameter:	Determines whether or not the specified parameter of the acquired waveform is within the specified range

Param:	Choose Measure, FFT, or XY
GO/NOGO telecom test:	Performs judgment using the conditions specified in the telecom test.
ANALYSIS	Selectable from XY, FFT, Wave Parameter, Accum Histogram and Serial Bus
X-Y	displays XY1, XY2 and T-Y simultaneously
FFT	supports up to 250 k points FFT
Wave parameter	One wave parameter can be viewed in one of the following formats. (Histogram, Trend and List)
Accum histogram	Histogram of the selected area can be displayed for continuous signal.
Serial bus	Analysis results of I ² C SPI can be displayed.

I²C Analysis Functions (Optional)

Applicable bus	I ² C bus	bus speed:	Max. 3.4 Mbit/s
		Address mode:	7 bit/10 bit
	SM bus		complies with System Management bus
Trigger function (Standard)			
Source:	SCL:	Ch1 to Ch4	
	SDA:	Ch1 to Ch4	
Type:	Address & data:	trigger on combination of assigned address & data pattern	
	Non-Ack:	trigger on non acq condition	
	Every start:	trigger on start condition	
	General Call:	trigger on general call and the following byte	
	Start byte / HS mode:	trigger on Start byte and HS mode	
Analysis			
Signal input:	Ch1 to Ch4, M1 to M4 can be configured		
Display of analysis results:	Display the analysis result using the following 2 methods		
	* Simple analysis result: Hex data, R/W, start condition, Ack, Address or Data		
	* List of detailed analysis results, R/W, Address or Data, start condition		
	Displays No., Time, Binary, Hex and Ack		

Search function	
Pattern search:	Set the address pattern, data pattern and Acknowledge bit condition and Search the waveform.
Number of analysis data points	Max. 5 k byte
Analysis result save function:	Save the list of the detailed analysis to a file in ASCII format

SPI Analysis Functions (Optional)

Trigger function		
Mode:	3 wire/4 wire	
Bit order:	MSB/LSB	
Analysis		
Signal input:	Clock (SCK) : Ch1 to Ch4 Data1 (MOSI): Ch1 to Ch4 Data2 (MISO): Ch1 to Ch4 CS signal (SS): Ch1 to Ch4	
Display of analysis results:	Display the analysis results using the following 2 methods	
	* simple analysis result: Hex CS status	
	* List of detailed analysis result Displays No., Time, Dt1, Dt2 and CS	
Search function		
Pattern search:	Set the waveform by specified data pattern (Frame pattern)	
Number of analysis data points	Max. 5 k byte	
Analysis result save function:	Save the list of the detailed analysis to a file in ASCII format	

Built-in Printer (/B5 Option)

Printing method	Thermal line-dot
Paper width	112 mm
Effective print width	104 mm (832 dots)

Auxiliary I/O Section

Rear panel I/O signal	Ext. trigger input, ext. trigger output, Trigger comparator output, GO/NO-GO I/O, video output
Probe interface terminal (front panel)	
No. of terminals:	4
Supported probes:	PBA2500
Probe power terminal (/P2 option, rear panel)	
No. of terminals:	2
Supported probes:	FET probe (700939), current probes (701932, 701933), and differential probes (701920, 701922)

Storage

Internal Storage Media	
Capacity	32 MB
Uses	Saving and loading waveforms and panel settings
Memory type	Flash ROM

Internal Hard Drive (/C8 Option)

Capacity/file system	30 GB FAT32
File name	Supports long file names of up to 256 ASCII characters

USB Peripheral Support

Connector	USB type A connector (receptacle) × 2
Electrical and mechanical specifications	Conforms to USB Revision 2.0
Supported transmission standards	LS (Low Speed) mode (1.5 Mbps), FS (Full Speed) mode (12 Mbps)
Supported devices	USB HID Class Ver.1.1 compliant mouse/104 keyboard USB Printer Class Ver.1.0 compliant printers EPSON: Ink Jet Printers Canon: Ink Jet Printers HP: PCL Ink Jet Printers USB Mass Storage Class Ver.1.1 compliant mass storage device USB HUB Device (1 unit only) support.

* Please contact your local Yokogawa representative for model names of verified devices

Max. No. of devices 4

PC Card Interfaces

Number of ports	2 (front panel (1), rear panel (1))
Supported cards	GPiB National Instruments NI PCMCIA-GPiB card Storage cards Flash ATA memory card (PC card TYPE II), PC card types, CF card + adapter card, and hard disk type PC cards

USB-PC Connections

Connector	USB type B connector (receptacle) × 1
Electrical and mechanical specifications	Conforms to USB Revision 2.0
Supported transmission standards	HS (High Speed) mode (480 Mbps), FS (Full Speed) mode (12 Mbps)
Supported class	Operates as a multifunctional device supporting two of the following protocols simultaneously. USBTMC-USB488 (USB Test and Measurement Class Ver.1.0) Accepts GPiB commands while using a USB bus Mass Storage Class Ver.1.1 The DL's internal storage media and hard disk, PC card, and USB MSC can be accessed (read/write) from the PC (formatting is not supported).

Ethernet Communication (/C10 and /C8 Options)

Connector type	RJ-45 connector
Electrical and mechanical specifications	Conforms to IEEE802.3
Transmission method	Ethernet (100BASE-TX/10BASE-T)
Communication protocol	TCP/IP
Supported services	SMTP client, DHCP, DNS, Microsoft network file sharing server and client SNTP client, Fire Wall

General Specifications

Rated supply voltage	100 to 120 VAC/200 to 240 VAC (switches automatically)
Allowed supply voltage fluctuation range	90 to 132 VAC/180 to 264 VAC
Rated supply frequency	50/60 Hz
Allowable power supply frequency variation	48 to 63 Hz
Maximum power consumption	300 VA
Withstanding voltage (between power supply and case)	1.5 kVAC for one minute.
External dimensions	350 (W) × 200 (H) × 178 (D) mm (when printer cover is closed, excluding handle and protrusions)
Weight (including printer)	Approximately 6.5 kg.
Battery backup	Setup data and clock are backed up with an internal lithium battery
Battery life:	Approximately 5 years (at ambient temperature of 25°C)
Operating temperature range	5-40°C

- Measured value under standard operating conditions after 30-minute warm-up and performing calibration.
Standard operating conditions: Ambient temperature: 23 ±5°C
Ambient humidity: 55 ±10%
Error in supply voltage and frequency: Within 1% of rating
- Value in the case of a repetitive signal.
The frequency bandwidth of a single-shot phenomenon is the smaller of the two values, DC to sampling frequency/2.5 or the frequency bandwidth of the repetitive phenomenon.
- When the input section is shorted, the acquisition mode is set to normal, interleave mode is OFF, accumulation is OFF, and the probe attenuation is set to 1:1.
- Typical value represents a typical or average value. It is not strictly warranted.
- The parallel acquisition architecture of the DL9000 series ensures no decrease in acquisition rate for multi-channel use.


PBA2500 (Optional Accessory)

Length	1.2 m
Bandwidth	DC to 2.5 GHz (-3 dB)
Attenuation ratio	1/10 ±2.0%
Input resistance	100 kΩ ±2.0%
Input capacitance	Approx. 0.9 pF (typical)
Dynamic range	±7 V
Operational range	±15 V
Offset range	±10 V
Max. input voltage	±25 V DC + AC peak

PBL5000 (Optional Accessory)

Length	0.95 m
Bandwidth	DC to 5 GHz (-3 dB)
Attenuation ratio	1/10 ±2.0%, 1/20 ±2.0% (selectable by changing the resistance)
Input resistance	450 Ω ±1.0%, 950 Ω ±1.0%,
Input capacitance	Approx. 0.25 pF (typical, with 450 Ω), 0.4 pF (typical, with 950 Ω)
Max. input voltage	20 V rms

Unit: mm

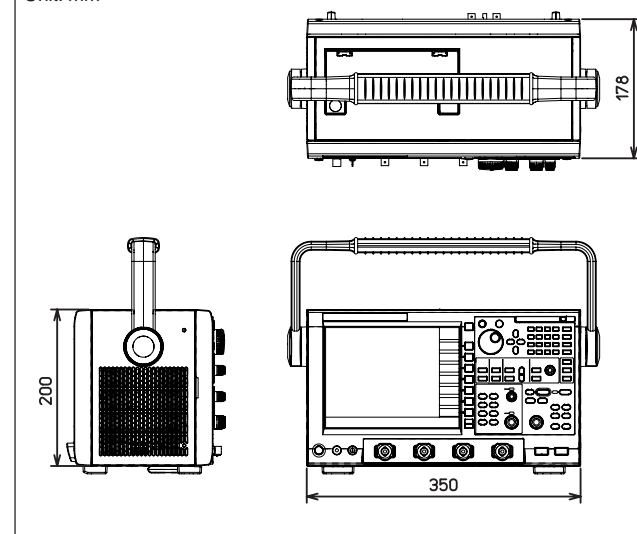

For detailed specifications, visit our homepage at

<http://www.yokogawa.com/tm/DL9000>

Model and Suffix Codes

Model	Suffix Codes	Description
701310		Digital Oscilloscope DL9140 4 ch, 1 GHz, max. 5 GS/s (2.5 GS/s/ch), 2.5 Mword/ch
701311		Digital Oscilloscope DL9140L 4 ch, 1 GHz, max. 5 GS/s (2.5 GS/s/ch), 6.25 Mword/ch
701312		Digital Oscilloscope DL9240 4 ch, 1.5 GHz, max. 10 GS/s (5 GS/s/ch), 2.5 Mword/ch
701313		Digital Oscilloscope DL9240L 4 ch, 1.5 GHz, max. 10 GS/s (5 GS/s/ch), 6.25 Mword/ch
Power cable	-D	UL/CSA standard
	-F	VDE standard
	-Q	BS standard
	-R	AS standard
	-H	GB standard
Help menu language	-HE	English Help
Options	/B5	Built-in printer
	/P2 ¹	Probe power connections on rear panel (2 outputs for current probes, differential probes)
	/C10 ²	Ethernet interface
	/C8 ²	Built-in HDD + Ethernet interface
	/F5 ³	I ² C + SPI bus analyzer

1: Please order /P2 option if you use either current probes or differential probes from Yokogawa. For 2.5 GHz active probe and 5 GHz low capacitance probe, this option is not necessary.
2: Choose either one.
3: I²C and SPI triggers are standard.

Standard Accessories

Name	Q'ty
Power cable	1
PB500 (500 MHz passive probe)	4
Printer roll paper (when option/B5 is specified)	3
User's manual (1 set)	1
Front cover (transparent)	1

Accessories (Optional)

Name	Model	Specifications
PB500 (10:1 passive probe)	701943	10 M Ω , 500 MHz BW
PBA2500 (2.5 GHz active probe)	701913	2.5 GHz BW
PBL5000 (5 GHz low capacitance probe)	701974	5 GHz BW
DC block	701975	for 50 Ω input, SMA connector
FET probe (900 MHz)	700939	900 MHz BW
100:1 probe	700978	100 MHz BW
Differential probe	701921	DC to 100 MHz BW/ Max. \pm 700 V
Differential probe	701922	DC to 200 MHz BW/Max. \pm 20 V
Differential probe	700925	DC to 15 MHz BW/Max. \pm 500 V
Differential probe	700924	DC to 100 MHz BW/Max. \pm 1400 V
Differential probe	701920	DC to 500 MHz BW/Max. \pm 30 V
Current probe	701933	DC to 50 MHz BW, 30A peak
Current probe	701932	DC to 100 MHz BW, 30A peak
Printer roll paper	B9988AE	10 m roll, 10 rolls/1 unit
Rack mount kit	701984-01	EIA standard
Trigger comparator output cable	701976	for Trigger comparator OUT

Related Products



[signal explorer™ is registered trademark of Yokogawa Electric Corporation]

Microsoft, MS, Windows, and Internet Explorer are registered trademarks or trademarks of Microsoft Corporation in the US and other countries.
This product's TCP/IP software and documentation on TCP/IP software were developed/manufactured by Yokogawa based on BSD Networking Software, Release1, under license from the University of California.
Other company names and product names appearing in this document are the registered trademarks or trademarks of their respective companies.

Note



- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- If this product is for use with a system requiring safeguards that directly involve personnel safety, please contact the Yokogawa sales offices.

Yokogawa's Approach to Preserving the Environment

- Yokogawa's electrical products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guideline and Product Design Assessment Criteria.

YOKOGAWA

YOKOGAWA ELECTRIC CORPORATION

Communication & Measurement Business Headquarters /Phone: (81)-422-52-6768, Fax: (81)-422-52-6624

E-mail: tm@csv.yokogawa.co.jp

YOKOGAWA CORPORATION OF AMERICA Phone: (1)-301-916-0409, Fax: (1)-301-916-1498

YOKOGAWA EUROPE B.V. Phone: (31)-33-4641858, Fax: (31)-33-4641859

YOKOGAWA ENGINEERING ASIA PTE. LTD. Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.

[Ed : 01/b] Copyright ©2005

Printed in Japan, 503(KP)

Specifications

Models

Model name (No.)	Max. sampling rate	Freq. bandwidth	Max. record length
DL9040 (701307)	5 GS/s	500 MHz	2.5 MW
DL9040L (701308)	5 GS/s	500 MHz	6.25 MW

Basic Specifications

Input channels	4 (CH1 to CH4)
Input coupling	AC, DC, GND, DC50Ω
Input impedance	1 MΩ ±1.0% approx. 20 pF (when using PB500 probe, 10 MΩ ±2.0%, approx. 14 pF) 50 Ω ±1.5%
Voltage axis sensitivity ranges	For 1 MΩ input: 2 mV/div to 5 V/div (steps of 1-2-5) For 50 Ω input: 2 mV/div to 500 mV/div (steps of 1-2-5)
Maximum input voltage	For 1 MΩ input: 150 Vrms CAT I (Less than 1 kHz) For 50 Ω input: 5 Vrms or less and 10 Vpeak or less
DC offset max. setting range (When probe attenuation set to 1:1)	For 1 MΩ input 2 mV/div to 50 mV/div: ±1 V 100 mV/div to 500 mV/div: ±10 V 1 V/div to 5 V/div: ±100 V For 50 Ω input 2 mV/div to 50 mV/div: ±1 V 100 mV/div to 500 mV/div: ±5 V
Vertical (voltage) axis sensitivity DC accuracy ¹	For 1 MΩ input: ±(1.5% of 8 div + offset voltage accuracy) For 50 Ω input: ±(1.5% of 8 div + offset voltage accuracy)
Offset voltage axis accuracy ¹	2 mV/div to 50 mV/div: ±(1% of setting + 0.2 mV) 100 mV/div to 500 mV/div: ±(1% of setting + 2 mV) 1 V/div to 5 V/div: ±(1% of setting + 20 mV)
Frequency characteristics ^{1,2}	For 50 Ω input, For 1 MΩ input (from the probe tip when using the dedicated passive probe (PB500)) (Attenuation point of -3 dB when inputting a sinewave of amplitude ±2 div or equivalent) 5 V/div to 10 mV/div: DC to 500 MHz 5 mV/div to 2 mV/div: DC to 400 MHz
Residual noise level ³	0.4 mV rms or 0.05 div rms, whichever is larger (typical value)
A/D conversion resolution	8-bit (25 LSB/div)
Bandwidth limit	For each channel, select FULL, 200 MHz, 20 MHz, 8 MHz, 4 MHz, 2 MHz, 1 MHz, 500 kHz, 250 kHz, 125 kHz, 62.5 kHz, 32 kHz, 16 kHz, 8 kHz.
Max. sampling rate	
Real time sampling mode	
Interleave mode ON:	5 GS/s
Interleave mode OFF:	2.5 GS/s
Repetitive sampling mode:	2.5 TS/s

Model and Suffix Codes

Model	Suffix Codes	Description
701307		Digital Oscilloscope DL9040 4 ch, 500 MHz, max. 5 GS/s (2.5 GS/s/ch), 2.5 Mword/ch
701308		Digital Oscilloscope DL9040L 4 ch, 500 MHz, max. 5 GS/s (2.5 GS/s/ch), 6.25 Mword/ch
701310		Digital Oscilloscope DL9140 4 ch, 1 GHz, max. 5 GS/s (2.5 GS/s/ch), 2.5 Mword/ch
701311		Digital Oscilloscope DL9140L 4 ch, 1 GHz, max. 5 GS/s (2.5 GS/s/ch), 6.25 Mword/ch
701312		Digital Oscilloscope DL9240 4 ch, 1.5 GHz, max. 10 GS/s (5 GS/s/ch), 2.5 Mword/ch
701313		Digital Oscilloscope DL9240L 4 ch, 1.5 GHz, max. 10 GS/s (5 GS/s/ch), 6.25 Mword/ch
Power cable	-D	UL/CSA standard
	-F	VDE standard
	-Q	BS standard
	-R	AS standard
	-H	GB standard
Help menu language	-HE	English Help
	-HC	Chinese Help
Options	/B5	Built-in printer
	/P2 ¹	Probe power connections on rear panel (2 outputs for current probes, differential probes)
	/C10 ²	Ethernet interface
	/C8 ²	Built-in HDD + Ethernet interface
	/F5 ³	I ² C + SPI bus analyzer

1: Please order /P2 option if you use either current probes or differential probes from Yokogawa. For 2.5 GHz active probe and 5 GHz low capacitance probe, this option is not necessary.
2: Choose either one
3: I²C and SPI triggers are standard. This will be available later Please contact Yokogawa for detail.

Trigger Section

Trigger modes	Auto, Auto Level, Normal, Single, and N Single
Trigger source	CH1 to CH4, LINE, EXT
Window comparator	Channels CH1 to CH4, or individual channels
Trigger types	Edge/State: Edge, Edge (Qualified), Edge OR, State Width: Pulse, Pulse (Qualified), Pulse State
Event Interval	Event Cycle, Event Delay, Event Sequence
Enhanced	TV (NTSC, PAL, HDTV, USER)/I ² C, SPI (3 wire, 4 wire), Serial pattern

Display

Display	8.4-inch color TFT liquid crystal display
---------	---

Functions

Waveform Acquisition/Display Functions

Acquisition modes	Select from three acquisition modes: Normal, Envelope, and Average.
Other acquisition modes	High resolution mode, Repetitive sampling mode, Interleave mode, Interpolate mode
Interpolate function	Interpolates actual sampled data by up to 1000 times (or up to 2000 times in High-Res. mode) and increases the time resolution (up to 2.5 TS/s)
X-Y	displays XY1, XY2 and T-Y simultaneously
Accumulation	Accumulates waveforms on the display. Choose Count/Time and Inten/Color.
Snapshot	Retains the current displayed waveform on the screen.

Analysis Functions

Search and Zoom function	Zooms the displayed waveform along the time (Horizontal Zoom) and voltage (Vertical Zoom) axes. Independent zooming factors can be applied to two zoom areas. Search types: Edge, Edge Qualified, State, Pulse, Pulse Qualified, Pulse State, Serial Pattern, I ² C (optional), SPI (optional)
History memory	DL9040L: 2000 waveforms (2.5 kV) DL9040: 1000 waveforms (2.5 kV)
Cursor measurements	Vertical, Horizontal, VT, Marker, Serial
Automatic measurement of Waveform Parameters function	MAX, MIN, HIGH, LOW, P-P, HIGH-LOW, +OVER, -OVER, RMS, MEAN, Sdev, IntegTY C.rms, C.mean, C.Sdev, C.IntegTY, (1/FREQ), FREQ, COUNT, BURST +WIDTH, -WIDTH, PERIOD, DUTY, RISE, FALL, DELAY
Telecom Test	Performs mask test and eye pattern measurement
Computation functions	Computes up to eight traces (CH1-CH4/M1-M4)
Reference functions	Display and analysis (computation and cursors) on up to four traces (M1-M4) of the saved waveform data.
Action-on-trigger	Modes: OFF, All Condition, (GO/NOGO Zone/Param), GO/NOGO Telecom Test Actions: Buzzer, Print, Save, Mail

Optional Functions

Built-in Printer (/B5 Option)
Internal Hard Disk Drive (/C8 Option)
Ethernet Communication (/C10 and /C8 Option)
I²C + SPI Bus Analysis Function (/F5 Option)

- Measured value under standard operating conditions after 30-minute warm-up and performing calibration.
Standard operating conditions: Ambient temperature: 23 ±5°C
Ambient humidity: 55 ±10%
Error in supply voltage and frequency: Within 1% of rating
- Value in the case of a repetitive signal.
The frequency bandwidth of a single-shot phenomenon is the smaller of the two values, DC to sampling frequency/2.5 or the frequency bandwidth of the repetitive phenomenon.
- When the input section is shorted, the acquisition mode is set to normal, interleave mode is OFF, accumulation is OFF, and the probe attenuation is set to 1:1.
(For detailed specifications, read the "Bulletin 7013-00E Digital Oscilloscope DL9000 Series".

Standard Accessories

Name	Q'ty
Power cable	1
PB500 (500 MHz passive probe)	4
Printer roll paper (when option/B5 is specified)	3
User's manual (1 set)	1
Front cover (transparent)	1

Accessories (Optional)

Name	Model	Specifications
PB500 (10:1 passive probe)	701943	10 MΩ, 500 MHz BW
PBA2500 (2.5 GHz active probe)	701913	2.5 GHz BW
PBD2000 (2 GHz differential probe)	701923	2.0 GHz BW
PBL5000 (5 GHz low capacitance probe)	701974	5 GHz BW

Note



- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- If this product is for use with a system requiring safeguards that directly involve personnel safety, please contact the Yokogawa sales offices.

Yokogawa's Approach to Preserving the Environment

- Yokogawa's electrical products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guideline and Product Design Assessment Criteria.

YOKOGAWA

YOKOGAWA ELECTRIC CORPORATION

Communication & Measurement Business Headquarters /Phone: (81)-422-52-6768, Fax: (81)-422-52-6624

E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA

Phone: (1)-770-253-7000, Fax: (1)-770-251-6427

YOKOGAWA EUROPE B.V.

Phone: (31)-33-4641858, Fax: (31)-33-4641859

YOKOGAWA ENGINEERING ASIA PTE. LTD.

Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.

[Ed : 01/b] Copyright ©2006

Printed in Japan, 601(KP)