

Main Specification

Basic Specifications

Analog Inputs

Input channels:	4 (CH1 to CH4)
Input coupling:	AC, DC, GND, DC50 Ω
Input impedance:	1 MΩ±1.0% approx. 20 pF (when using PB500 probe, 10 MΩ±2.0%, approx. 14 pF) 50 Ω±1.5%
Voltage axis sensitivity:	For 1 MΩ input : 2 mV/div to 5 V/div (steps of 1-2-5) For 50 Ω input : 2 mV/div to 500 mV/div (steps of 1-2-5)
Maximum input voltage:	For 1 MΩ input : 150 Vrms CAT I (when frequency is under 1 kHz) For 50 Ω input : 5 Vrms or less and 10 Vpeak or less
Vertical (voltage) axis sensitivity: DC accuracy*1:	For 1 MΩ input : ±(1.5% of 8 div + offset voltage accuracy) For 50 Ω input : ±(1.5% of 8 div + offset voltage accuracy)
Offset voltage axis accuracy*1:	2 mV/div to 500 mV/div : ±(1% of setting + 0.2 mV) 100 mV/div to 500 mV/div : ±(1% of setting + 2 mV) 1 V/div to 5 V/div : ±(1% of setting + 20 mV)
Frequency characteristics*1,2 (Attenuation point of -3 dB when inputting a sine wave of amplitude ±2 div or equivalent)	For 50 Ω input 0.5 V/div to 10 mV/div: DC to 1 GHz 5 mV/div: DC to 750 MHz 2 mV/div: DC to 600 MHz For 1 MΩ input (from the probe tip when using the PB500 dedicated passive probe) 5 V/div to 10 mV/div: DC to 500 MHz 5 mV/div to 2 mV/div: DC to 400 MHz
A/D conversion resolution:	8-bit (25 LSB/div)
Bandwidth limit:	For each channel, select from FULL, 200 MHz, 20 MHz, 8 MHz, 4 MHz, 2 MHz, 1 MHz, 500 kHz, 250 kHz, 125 kHz, 62.5 kHz, 32 kHz, 16 kHz, and 8 kHz (separately configurable on each of channels CH1 to CH4); Limit implemented with analog (200 MHz, 20 MHz) and digital filters (IIR+ FIR).
Max. sampling rate:	Real time sampling mode: Interleave mode ON: 5 GS/s Interleave mode OFF: 2.5 GS/s Repetitive sampling mode: 2.5 TS/s
Maximum record length:	6.25 MW
Time axis setting range:	500 ps/div to 50 s/div (steps of 1-2-5)
Time base accuracy*1:	±0.001%
Max. acquisition rate*3:	When using 1.25 MW, 60 waveforms/sec/ch When using 12.5 kW, 9000 waveforms/sec/ch When using 2.5 kW, 25000 waveforms/sec/ch 400 ns or less (equivalent to 2.5 M waveforms/sec)
Min. dead time (N single)*3:	

Logic Inputs

Number of inputs:	32 bits (using four logic probes)
Logic probe:	Type 701980 or 701981 (8bits each)
Maximum toggle frequency:	250 MHz (701981), 100 MHz (701980)
Maximum input voltage:	±40V(DC + AC peak) or 28Vrms (When frequency is under 1 kHz)
Minimum input voltage:	500 mVp-p
Input voltage range:	±10 V (DC + AC peak, 701981), ±40 V (DC + AC peak, 701980) ±10 V (0.1 V setting resolution, 701981) ±40 V (0.1 V setting resolution, 701980)
Logic Threshold level:	approx. 10kΩ/approx. 9 pF (701981) approx. 1MΩ/approx. 10 pF (701980)
Input impedance:	Interleave mode ON: 5 GS/s Interleave mode OFF: 2.5 GS/s
Max. sampling rate:	
Maximum record length:	6.25 MW

Trigger Section

Trigger modes:	Auto, Auto Level, Normal, Single, and N Single
Trigger source:	CH1 to CH4, LINE, EXT and LOGIC
Trigger types:	
Edge/State	
Edge:	Trigger occurs on the edge of a single trigger source.
Edge (Qualified):	Trigger occurs on the edge of a single trigger source when Qualification condition is true.
Edge OR:	Trigger occurs on the OR logic of the edge conditions set to multiple trigger sources (Max. 50 MHz).
State:	Trigger occurs on ENTER/EXIT when the state condition is true.
Logic Edge:	Trigger occurs on the edge of a single trigger source for each Pod (PodA to PodD)
Logic Edge (Qualified):	Trigger occurs on the edge of a single trigger source when Qualification condition is true for each Pod (PodA to PodD)
Logic State:	Trigger occurs on ENTER/EXIT when the state condition is true for each Pod (PodA to PodD)
Width	
Pulse:	Trigger occurs on a width of a single trigger source.
Pulse (Qualified):	Trigger occurs on a width of a single trigger source when Qualification condition is true
Pulse State:	Trigger occurs on a width when the state condition is true.
Logic Pulse:	Trigger occurs on a width of a single trigger source for each Pod (PodA to PodD)

Logic Pulse State:	Trigger occurs on a width when the state condition is true for each Pod (PodA to PodD)
Time width setting mode:	More than, Less than, Between, Out of Range, Time out
Specified time (T1/T2):	1 ns to 10 s, 500 ps resolution
Time accuracy:	±(0.2% of setting + 1 ns)
Event Interval	
Event Cycle:	Trigger occurs when the event cycle is within the specified time range.
Event Delay:	After Event 1 occurs, trigger occurs on 1st occurrence of Event 2 that satisfies the timing constraints. The trigger process is reset if Event 1 or Event 2 occurs before the timing constraints are satisfied.
Event Sequence:	After Event 1 occurs, trigger occurs on 1st occurrence of Event 2 that satisfies the timing constraints. The trigger process is not reset if Event 1 occurs before the timing constraints are satisfied. Function identical to the time width setting mode for Width
Time width setting mode:	Specified time (T1/T2): 1.5 ns to 10 s, 500 ps resolution
Event Cycle:	Time accuracy: ±(0.2% of setting + 1 ns)
Event Delay and Event Sequence:	After Event 1 occurs, trigger occurs on 1st occurrence of Event 2 that satisfies the timing constraints. The trigger process is reset if Event 1 or Event 2 occurs before the timing constraints are satisfied. When trigger source on Event 1 and Event 2 is selected from CH1 to CH4 or when both trigger sources on Event 1 and Event 2 are selected from Pod A to Pod D. Specified time (T1/T2): 1.5 ns to 10 s, 500 ps resolution Time accuracy: ±(0.2% of setting + 1 ns) When trigger source on Event 1 is selected from CH1 to CH4, when trigger source on Event 2 is selected from Pod A to Pod D or when trigger source on Event 2 is selected from CH1 to CH4 Specified time (T1/T2): 20 ns to 10s, 500ps resolution Time accuracy: ±(0.2% of setting + 1 ns)
Event types:	Events can be selected from Edge, Edge Qualified, State, Logic Edge, Logic Edge (Qualified), Pulse, Pulse Qualified, Pulse State, Logic Pulse, Logic Pulse State, I ² C, CAN, SPI, and Serial pattern, LIN (Selectable as event except for TV, Edge OR)
Enhanced	
TV: Trigger occurs on video signals of various broadcasting system formats	
Mode:	NTSC, PAL, HDTV, USER
Input CH:	CH1-CH4
I ² C: Triggers on I ² C bus signals	
Mode:	NON ACK, Every Start, General Call, Start byte, HS Mode, ADR&DATA
SPI: Triggers on SPI (serial peripheral interface) bus signals	
Mode:	3 wire, 4 wire
CAN, LIN: CAN, LIN bus signals:	
Trigger source:	CH1 to CH4:
Trigger types:	CAN SOF, Frame ID, Data field, Remote Frame, Error Frame, Ack, ID, Data OR, Data OR, Event Internal
Bit rate:	LIN Synch Break, Event Interval
Input CH:	CAN 1 Mbps, 500 kbps, 250 kbps, 125 kbps, 83.3 kbps, 33.3 kbps User (freely settable in 100bps increments) 19.2 kbps, 9.6 kbps, 4.8 kbps, 2.4 kbps, 1.2 kbps
Serial Pattern: Triggers on general-purpose serial communication signals.	LIN CH1 to CH4: Input through differential probe
Max. bit rate:	50 Mbps
Max. bit length:	128 bits

Display

Display	8.4-inch (21.3cm) color TFT liquid crystal display
Total number of pixels:	1024 × 768 (XGA)
Waveform display resolution:	800 × 640

Functions

Waveform Acquisition/Display Functions:	
Acquisition modes:	Selectable from three acquisition modes – Normal, Average and Envelope
Other acquisition functions:	High resolution mode, Repetitive sampling mode, Interpolate function, Roll mode
Display Format:	The display can be split to the following ways for analog waveform. Single (no split), Dual (two ways), Triad (three ways), Quad (four ways) Analog waveform area and logic waveform area are split to two windows.
Accumulation:	Bundle display of logic waveform area, State display
Snapshot:	Accumulates waveforms on the display Retains the current displayed waveform on the screen.

Analysis Functions

Search and Zoom function:	Zooms the displayed waveform along the time (Horizontal Zoom) and voltage (Vertical Zoom) axes. Independent zooming factors can be applied to two zoom areas.
Auto scroll function:	Automatically scrolls the zoom window along the time axis
Search function:	Searches the currently displayed waveform for a specified portion

Search types:	occurring beyond a specified time, and displays the zoomed result on the screen. Edge, Edge (Qualified), State, Pulse, Pulse (Qualified), Pulse, State, Serial Pattern, Logic Edge, I ² C (optional), SPI (optional), CAN (optional), LIN (optional)
History memory:	
Max data:	2000 (2.5 kW), when using history 1600 (2.5 kW), when in N single mode
History search:	Searches for and displays waveforms from the history memory that meet specified conditions.
Search types:	Rect, Wave, Polygon, Parameter (Measure/FFT/XY)
Replay:	Automatically replays history waveforms.
Display:	Selected acquisition (#) or Average (Avg.)
Cursor measurements:	The following five cursors can be selected: Vertical, Horizontal, VT, Marker, Serial
Automatic measurement of waveform parameters:	Performs automated measurement of the following waveform parameters.
Items unrelated to cycle which will be derived out of all data in the range.	MAX, MIN, HIGH, LOW, P-P, HIGH-LOW, +OVER, -OVER, RMS, MEAN, Sdev, IntegTY
Items related to cycle which will be derived out of all data in the range.	C.rms, C.mean, C.Sdev, C.IntegTY, (1/FREQ), FREQ, COUNT, BURST
Items which will be derived from the first encounter from the beginning of the specified range.	+WIDTH, -WIDTH, PERIOD, DUTY, RISE, FALL, DELAY
Telecom test:	Performs mask test and eye pattern measurement
Mask test items:	Wave Count, Wave Count%, Sample Point Count, Sample Point Count%
Eye pattern items:	Vtop, Vbase, rtop, rbase, Tcrossing1, Tcrossing2, Vcrossing, Crossing%, Eye Height, Eye Width, Q Factor, Jitter, Duty Cycle Distortion%, Ext Rate dB, Rise, Fall
Computation functions:	Computes up to eight traces (CH1-CH4/M1-M4) +, -, x, INTEG, COUNT (EDGE), COUNT (ROTARY), Through, Delay, Moving Avg, Low Pass, High Pass, Stuff Bit (CAN option), DA computation, User Define (optional), PowerZ/I ² t (optional)
Reference functions:	Display and analysis (computation and cursors) of up to four traces (M1-M4) of the saved waveform data. Waveforms including history can also be loaded for history searches or replay. Various parameters can be changed (however waveforms are not affected by T/Div changes).
Action-on-trigger:	Automatically measured waveform parameters and waveform zones are determined, and the selected action is carried out each time conditions are met.
Modes:	OFF, All Condition, (GO/NOGO Zone/Param), (GO/NOGO Telecom Test)
Actions:	Buzzer, Print, Save, Mail
ANALYSIS:	Selectable from XY, FFT, Wave Parameter, Accum Histogram and Serial Bus

I²C Bus Analysis Functions (optional)

● Applicable bus :	I ² C bus: Bus speed : Max. 3.4 Mbit/s Address mode : 7 bit/10 bit SM bus: complies with System Management bus
● Trigger function (standard):	Source : SCL: CH1 to CH4 SDA: CH1 to CH4 Type: Selectable from the following five options: Address & data, Non-Ack, Every start, General call, Start byte / HS mode
● Analysis function:	
Signal input:	CH1 to CH4, M1 to M4 can be configured
Simple display mode:	Data (hex representation), R/W, start condition, presence/ absence of ACK, address or data
Detailed data display mode:	Time from the reference point, data (simultaneous binary and hex representations), presence/absence of ACK, R/W, address or data, start condition
Analyzable number of data items:	40,000 bytes max.
● Search function:	
Pattern search:	Searches data that agrees with the preset address pattern, data pattern and acknowledge bit condition.
● Analysis result save function:	
Storage of analysis list data:	The data can be saved to CSV-format files.

SPI Bus Analysis Functions (optional)

● Trigger function:(Standard)	
Mode:	3 wire/4 wire
Bit order:	MSB/LSB
Source:	CH1 to CH4
● Analysis function:	
Analyzable number of data items:	40,000 bytes max. Analysis results can be displayed using the following 2 methods
Display of analysis results:	Data (hex representation), CS signal status
Simple analysis result list:	Detailed analysis result list, time from the reference point, data (select and show either Binary or Hex data), and CS signal status can be displayed.
Detailed analysis result display:	
● Search function:	
Pattern search:	Waveforms can be searched by specifying data pattern. When a waveform that agrees with the pattern is found, the zoom box moves to the position of that waveform to show the specified waveform.
● Analysis result save function:	
Storage of analysis list data:	The data can be saved to CSV-format files.

CAN/LIN Bus Analysis Functions (optional)

● Applicable bus:	CAN version 2.0 A/B High-speed CAN (ISO11898) Low-speed CAN (ISO11519-2), LIN rev 1.3, rev 2.0
● Bit rate:	CAN 1 Mbps, 500 kbps, 250 kbps, 125 kbps, 83.3 kbps, 33.3 kbps, user-defined (100 bps resolution) LIN 19.2 kbps, 9.6 kbps, 4.8 kbps, 2.4 kbps, 1.2 kbps, user-defined (10 bps resolution)
● Trigger function (standard):	
Source:	CH1 to CH4, Input through differential probe
Type:	SOF trigger, Frame ID trigger, Data field trigger, Remote Frame trigger, Error Frame trigger, Ack trigger, Frame ID/ Data OR trigger LIN Synch Break trigger

● Analysis function:	
Analyzable number of frames:	3,000 max.
Analysis result display:	Waveform and analysis list display Detailed analysis list display (Analysis display items: Frame type, time from trigger point, frame ID, DLC, Data, CRC, presence/absence of ACK)
CAN	ID, ID-Field, Data, CheckSum, Information
LIN	Data search Field jump Stuff bit calculation
● Analysis support functions:	
● Analysis result save function:	
Storage of analysis list data:	The data can be saved to CSV-format files.

Auxiliary I/O Section

Rear panel I/O signal:	Ext. trigger input, ext. trigger output, GO/NO-GO I/O, video output
Probe interface terminal (front panel):	
No. of terminals:	4
Probe power terminal (I/P4 option, rear panel):	
No. of terminals:	4

Internal Hard Drive (I/C8 Option)

Capacity/file system:	40 GB FAT32
File name:	Supports long file names of up to 256 ASCII characters

USB Peripheral Connection Ports

Connector:	USB-type A connector × 2
Supported transmission standards:	
Supported devices:	USB 2.0 Low Speed, Full Speed USB HID Class Ver1.1-compliant mouse/109 keyboard USB Printer Class Ver.1.0-compliant printers USB Mass Storage Class Ver.1.1-compliant mass storage device USB hub device (1 unit only)
* Please contact your local Yokogawa sales office for model names of verified devices	
Max. No. of devices:	4

PC Card Interfaces

Number of slots:	2 (front panel (1), rear panel (1))
Supported cards:	GPIOB card (National Instruments NI PCMCIA-GPIB card), Flash ATA memory card (PC card TYPE II), CF card + adapter card, and various hard disk type PC cards
* Please contact your local Yokogawa sales office for model names of verified devices	

USB-PC Connection Ports


Connector:	USB-type B connector × 1
Supported transmission standards:	USB2.0 (High Speed) mode, FS (Full Speed) mode
Supported class:	Operates as a multifunctional device simultaneously supporting the following two protocols: USBTMC-USB488 (USB Test and Measurement Class Ver.1.0) Mass Storage Class Ver.1.1 (formatting is not supported).

Ethernet Communication (I/C10 and I/C8 Options)

Connector type:	RJ-45 connector × 1
Transmission method:	Ethernet (100BASE-TX/10BASE-T)
Supported services:	DHCP, DNS, Microsoft network file sharing server & client, FTP server, SMTP client, SMTP client, Firewall functions, Web Server functions

General Specifications

Rated supply voltage:	100 to 120 V AC/220 to 240 V AC (automatically selected)
Rated supply frequency:	50/60 Hz
Maximum power consumption:	300 VA
External dimensions:	350(W) x 200(H) x 285(D)mm (when printer cover is closed; excluding handle and protrusions)
Weight:	Approx. 7.7 kg (excluding printer (optional))
Operating temperature range:	5 to 40°C
1. Measured value under standard operating conditions after a 30-minute warm-up followed by calibration.	
Standard operating conditions:	Ambient temperature: 23 ±5°C Ambient humidity: 55 ±10%RH Error in supply voltage and frequency: Within 1% of rating
2. Value in the case of a repetitive signal	
The frequency bandwidth of a single-shot phenomenon is the smaller of the two values, DC to sampling frequency/2.5 or the frequency bandwidth of the repetitive phenomenon.	
3. The parallel acquisition architecture of the DL9710L ensures no decrease in acquisition rate for multi-channel use.	

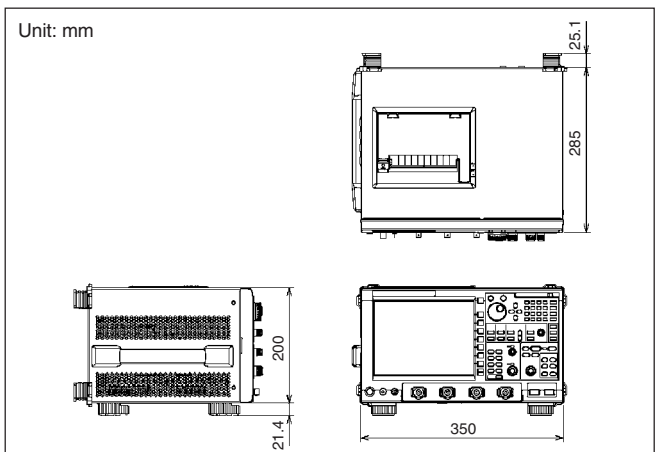

For detailed specifications, visit our homepage at

<http://www.yokogawa.com/tm/DL9710L>

Model and Suffix Codes of DL9710L

Model	Suffix Code	Description
701331		DL9710L: 4ch 1GHz + Logic 32bits Max. 5 GS/s(2.5 GS/s/ch), 6.25 MW/ch
Power Cable	-D	UL/CSA standard
	-F	VDE standard
	-Q	BS standard
	-R	AS standard
	-H	GB standard
Help menu language	-HE	English Help
Logic Probe	-L0	No Logic Probe attached
	-L2	Attach two 250 MHz Logic Probes (701981)
	-L4	Attach four 250 MHz Logic Probes (701981)
Options	/B5	Built-in printer
	/P4 ¹	4 Probe power connections on rear panel
	/C8 ²	Built-in HDD + Ethernet interface
	/C10 ²	Ethernet interface
	/G2 ³	User-defined math function
	/G4 ³	Power Supply Analysis Function
	/F5 ⁴	I ² C+SPI bus analyzer
	/F7 ⁴	CAN+LIN+SPI bus analyzer
/F8 ⁴	I ² C+SPI+CAN+LIN bus analyzer	

*1: Please order /P4 option if you use either current probes or differential probes such as 701920, 701922.

*2: Choose either one

*3: Choose either one

*4: Choose either one. I²C, CAN, LIN and SPI triggers are standard.

Related products



Standard Accessories

Name	Qty
Power Cable	1
3 prong-to-2 prong adapter	1
PB500 passive probe	4
Logic probe 701981 (when -L0 is specified)	—
Logic probe 701981 (when -L2 is specified)	2
Logic probe 701981 (when -L4 is specified)	4
Printer roll paper (when option /B5 is specified)	1
User's manual (1 set)	1
Front panel cover	1
Rubber leg cap (2 per order)	2
Soft case	1

Accessories (Optional)

Name	Model	Specification
PB500(10:1 passive probe)	701943	10 MΩ(10:1), 500 MHz, 1.5 m(one per order)
PBA2500(2.5 GHz active probe)	701913	2.5 GHz BW
PBD2000(2.0 GHz differential probe)	701923	2.0 GHz BW
Miniature passive probe	701942	10:1, DC to 350 MHz, 3 m
100:1 high voltage probe	701944	DC to 400 MHz, 1.2 m
100:1 high voltage probe	701945	DC to 200 MHz, 3 m
PBL5000 (5 GHz probe)	701974	5 GHz BW
DC block	701975	For 50 Ω input, SMA connector
FET probe	700939	900 MHz BW
Logic probe	701980	1 MΩ/10 pF, 100 MHz toggle frequency
Logic probe	701981	10 kΩ/9 pF, 250 MHz toggle frequency
100:1 probe	700978	100 MHz BW
Differential probe	701921	DC to 100 MHz BW/Max. ±700 V
Differential probe	701922	DC to 200 MHz BW/Max. ±20 V
Differential probe	700924	DC to 100 MHz BW/Max. ±1400 V
Differential probe	701920	DC to 500 MHz BW/Max. ±30 V
Current probe	701933	DC to 50 MHz BW, 30 Arms
Current probe	701932	DC to 100 MHz BW, 30 Arms
Printer roll	B9850NX	30 m roll, 5 rolls/order
Rack mount kit for DL9710L	701983-01	EIA standard-compliant
	701983-02	JIS standard-compliant
MATLAB tool kit ¹	701991	For DL series
	701992-SP01	For DL/WE series, standard type
Xviewer	701992-GP01	For DL/WE series, with computation function
	701919	Circular Base, 1 arm

¹ DL9710L will be supported by MATLAB tool kit at the end of March, 2007.

[signal explorer is a registered trademark of Yokogawa Electric Corporation.]

Microsoft, MS, Windows, and Internet Explorer are registered trademarks or trademarks of Microsoft Corporation in the US and other countries.

This product's TCP/IP software and documentation on TCP/IP software were developed/manufactured by Yokogawa based on BSD Networking Software, Release 1, under license from the University of California.

Other company names and product names appearing in this document are the registered trademarks or trademarks of their respective companies.

Note



- Before operating the product, read the user's manual thoroughly for proper and safe operation.

YOKOGAWA

YOKOGAWA ELECTRIC CORPORATION
Communication & Measurement Business Headquarters /Phone: (81)-422-52-6768, Fax: (81)-422-52-6624
E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA Phone: (1)-770-253-7000, Fax: (1)-770-251-6427
YOKOGAWA EUROPE B.V. Phone: (31)-33-4641858, Fax: (31)-33-4641859
YOKOGAWA ENGINEERING ASIA PTE. LTD. Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.
[Ed : 01/b] Copyright ©2007
Printed in Japan, 703(KP)