

# Signal Sources 2030 Series

## Option 9 Internal Pulse Generator

**AEROFLEX**  
A passion for performance.



Internal pulse generator producing single or double pulse RF carriers  
for testing radar RF and IF stages

- Programmable pulse parameters
- External trigger function
- Single and double pulse
- Variable pulse repetition frequency
- Variable pulse delay
- Variable pulse pair spacing
- Variable pulse width
- Wide carrier frequency range
- On/Off ratio of 80 dB
- Eliminates need for external pulse generator

*Option 9 Pulse Generator provides the user with internally generated single or double pulses. When combined with Option 2, Pulse Modulation, a solution is provided to aid the testing of radars, EMC or TDMA systems.*

*The pulse generator can be used with FM, PM and wideband FM or with unmodulated carriers.*

*With the Pulse Generator allowing variable control of the pulse parameters, many different types of systems can be efficiently and easily evaluated.*

### Simple Interface

Parameters can be adjusted by keyboard entry of data or by using the  $\uparrow\downarrow$  keys. The use of a large screen dot matrix display ensures clear and unambiguous readout. Within each display, soft keys are assigned alongside the display to allow parameter entry or to select the relevant functions.

### Pulse Generator

With Options 2 and 9 combined, single and double pulsed RF carrier outputs can be generated. Pulse width can be varied from 50 ns to 100 ms. Pulse delays can be set from 1  $\mu$ s to 100 ms in single trigger mode and pulse pair spacing can be varied from 100 ns to 100 ms. Triggering can be continuous or via an external source. See Figures 1 and 2 for more details.

The pulse generator with Option 2 can be used over the entire frequency range of the 2030 series, with the level range of -144 dBm to +13 dBm.

### Output Control

Synchronization and video outputs are available on rear panel BNC connectors. SYNC provides a 400 ns pulse indicating the start of the pulse. VIDEO provides square waves with fixed rise and fall times and variable parameters such as pulse delay, width and repetition rate.

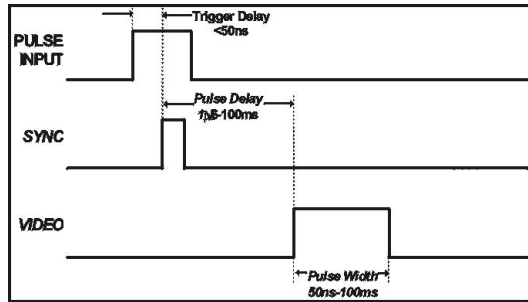


Figure 1 - single pulse, external trigger

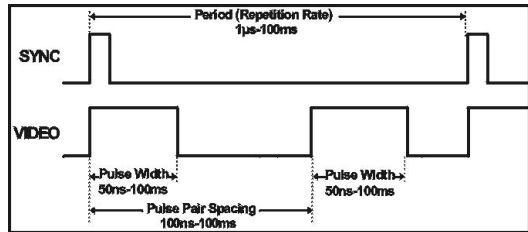


Figure 2 - double pulse, internal trigger

## SPECIFICATION

Specifications remain as standard 2030 series with the following additions.

### OPTION 9 INTERNAL PULSE GENERATOR

#### VIDEO OUTPUT (REAR PANEL BNC)

##### Pulse Width(s)

50 ns to 100 ms, resolution 50 ns

##### Repetition Rate/ Period (internal trigger)

1  $\mu\text{s}$  to 100 ms, resolution 50 ns

##### Pulse Delay (Single or Double pulse)

1  $\mu\text{s}$  to 100 ms, resolution 50 ns

##### Double Pulse Pair Spacing

100 ns to 100 ms, resolution 50 ns

##### Level

Pseudo TTL (Typ. 0 to 4.5 V, 0 to 2.5 V into 50  $\Omega$ )

##### Rise/Fall Time

Less than 5 ns

#### SYNC OUTPUT (REAR PANEL BNC)

##### Pulse Width

Typically 400 ns

##### Level

Pseudo TTL (Typ. 0 to 4.5 V, 0 to 2.5 V into 50  $\Omega$ )

##### Rise/Fall Time

Less than 5 ns

#### EXTERNAL TRIGGER (PULSE INPUT)

##### Characteristics

Rising edge, TTL level into 50  $\Omega$

Min. Pulse Width 10 ns

##### Trigger to SYNC Delay

Less than 50 ns

##### Trigger to SYNC Jitter

Typically 25 ns

#### RF OUTPUT (WITH OPTION 2 FITTED)

##### Level Range

-144 dBm to +13 dBm overrange to +19 dBm uncalibrated

##### Accuracy

Additional level error of  $\pm 0.5$  dB

##### Modulation Modes

Pulse modulation may be used at the same time as FM, PM or wide-band FM.

##### Pulse Characteristics

As above, except;

##### Rise/Fall Time

Typically <math>< 25\text{ ns}</math>

##### ON/OFF Ratio

Better than 70 dB, typically better than 80 dB

## **VERSIONS AND ACCESSORIES**

---

*When ordering please quote the full ordering number information.*

### **Ordering Numbers**

#### **Versions**

2030	10 kHz to 1.35 GHz Signal Generator
2031	10 kHz to 2.7 GHz Signal Generator
2032	10 kHz to 5.4 GHz Signal Generator
Option 009	Pulse generator (cannot be used with Option 005)

#### **Options**

Option 001	Second internal modulation oscillator
Option 002	Pulse modulation
Option 003	19 dBm Output (2030 only)
Option 006	Avionics (requires Option 001, cannot be used with Option 003)
Option 008	RF Profiles and complex sweep
Option 010	DME (requires Option 001 & 006, cannot be used with Option 005)
Option 112	External modulation inputs (2) 600 $\Omega$ impedance

---

#### **Note**

Option 9 is not available with Option 5 or on 2040 and 2050 series.

**CHINA Beijing**

Tel: [+86] (10) 6467 2761 2716  
Fax: [+86] (10) 6467 2821

**CHINA Shanghai**

Tel: [+86] (21) 6282 8001  
Fax: [+86] (21) 62828 8002

**FINLAND**

Tel: [+358] (9) 2709 5541  
Fax: [+358] (9) 804 2441

**FRANCE**

Tel: [+33] 1 60 79 96 00  
Fax: [+33] 1 60 77 69 22

**GERMANY**

Tel: [+49] 8131 2926-0  
Fax: [+49] 8131 2926-130

**HONG KONG**

Tel: [+852] 2832 7988  
Fax: [+852] 2834 5364

**INDIA**

Tel: [+91] 80 5115 4501  
Fax: [+91] 80 5115 4502

**KOREA**

Tel: [+82] (2) 3424 2719  
Fax: [+82] (2) 3424 8620

**SCANDINAVIA**

Tel: [+45] 9614 0045  
Fax: [+45] 9614 0047

**SPAIN**

Tel: [+34] (91) 640 11 34  
Fax: [+34] (91) 640 06 40

**UK Burnham**

Tel: [+44] (0) 1682 604455  
Fax: [+44] (0) 1682 662017

**UK Stevenage**

Tel: [+44] (0) 1438 742200  
Fax: [+44] (0) 1438 727601  
Freephone: 0800 282388

**USA**

Tel: [+1] (316) 522 4981  
Fax: [+1] (316) 522 1360  
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2004.

[www.aeroflex.com](http://www.aeroflex.com)  
[info-test@aeroflex.com](mailto:info-test@aeroflex.com)



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.