


Agilent 86130A BitAlyzer® Error Performance Analyzer

Technical Specifications

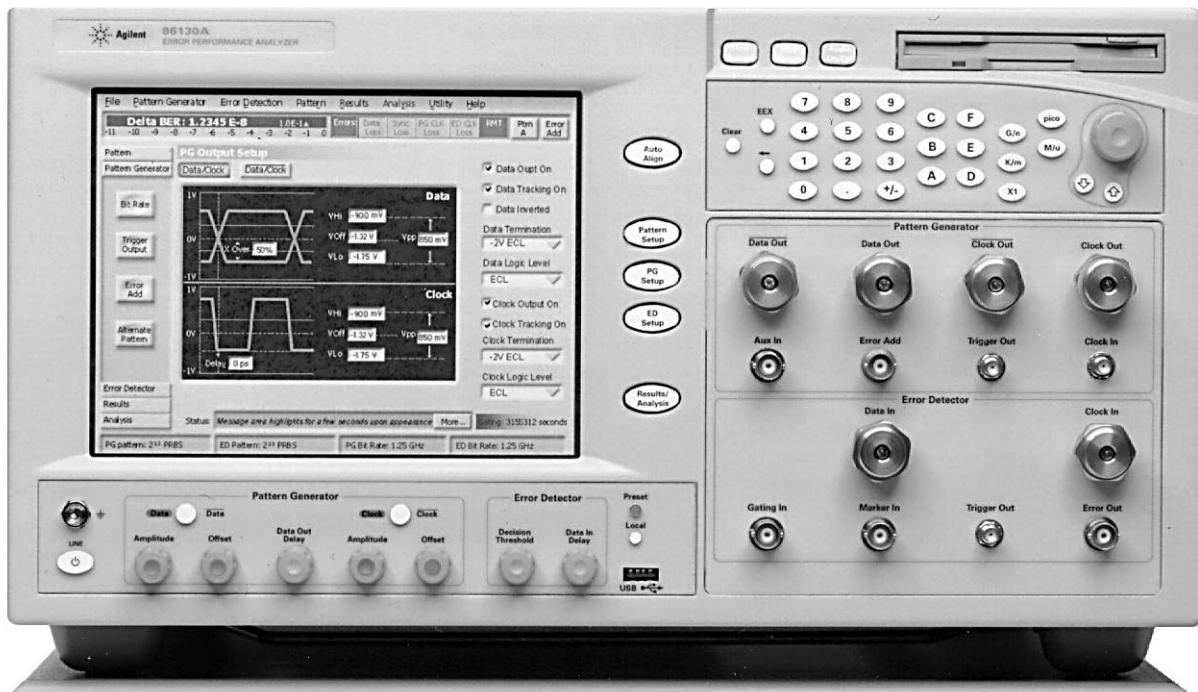

General Features

Internal Hard Disk

For local storage of user patterns and data

Removable Storage

MS-DOS® compatible 3.5" Superdrive (accepts 1.4 Mbyte HD disks & 120 Mbyte SuperDisks™)

Data Entry

Touch-sensitive display, numeric keypad with up/ down arrows, analogue feel position controls, or provided USB keyboard and mouse if desired.

Display

Internal 8" (diagonal) backlit LCD touch-screen

Interfaces

GPIB (IEEE 488), LAN ("10 Base T" Ethernet) for printing and file transfer, Parallel/Centronics printer port, external VGA output.

On-line Help

Context-sensitive On-Line help is included. Operation, programming and quick-start guides are also included and supplied on MS-Windows® compatible CD-ROM.

Accessories Supplied

USB compatible keyboard; mouse; stylus; Quick Start Manual on paper; Quick Start Card.

MS-Windows® compatible CD-ROM containing "PDF" files of Operating, Quick-Start, and Programming guides.

Power Cord; 6x APC-3.5 connector savers (female to female); 6x 50Ω APC-3.5 (male) terminations, 3x 1 metre SMA (male to male) cables.



Agilent Technologies

Innovating the HP Way

Pattern Generator

Pattern Generator Parameters

Operating Frequency

Operating Frequency

50 MHz to 3.6 GHz with external clock

50 MHz to 3.0 GHz with internal clock source

Internal Clock Source

Frequency Range

50 MHz to 3.0 GHz

Frequency Accuracy

± 20 ppm

Test Patterns

2^N-1 PRBS

$2^{31}-1$, $2^{23}-1$, $2^{15}-1$, $2^{10}-1$, 2^7-1

2^N PRBS

2^{23} , 2^{15} , 2^{10} , 2^7

Variable Mark Density

1/8, 1/4, 1/2, 3/4, 7/8

User Defined Patterns

Variable length patterns from 1 to 8 Mbits

Alternating Patterns

Change between two equal length user patterns, each up to 4 Mbits long. Changeover is synchronous with the end of a pattern, under the control of the front panel or the Auxiliary Input.

Error Add

Single, continuously variable between 1×10^{-2} and 1×10^{-9} , and user specified bursts of errors.

Pattern Editor

Fully flexible pattern editor included with "cut", "copy" and "paste" functions.

Pattern Generator Input/Output Specifications

Data and Data Outputs

Data and $\overline{\text{Data}}$ outputs are independently settable

Format: NRZ

Polarity: Normal or Inverted

Amplitude: 0.5 to 2 V in 10 mV steps

Offset: See figure below. 10mV resolution.

Data Outputs On/Off: 'Off' goes to high impedance state

Supported Terminations:

0 V (LVTTTL, SCFL, etc.), -2 V (ECL), +1.3 V (3.3 V PECL), AC-coupled

Jitter (pk-pk): <20 ps, <12 ps typical

Transition Time (10–90%): <45 ps typical

Variable Crossover: Supported

Clock/ Data Delay Range: 0–1 bit period or 10 ns, whichever is less. 1 ps resolution.

Interface: DC-coupled
50 Ω reverse terminated,
APC-3.5 connector

Clock and Clock Outputs

Clock and $\overline{\text{Clock}}$ outputs are independently settable

Amplitude: 0.5 to 2 V in 10 mV steps

Offset: See figure below.

10mV resolution.

Clock Outputs On/Off: 'Off' goes to high impedance state

Supported Terminations:

0 V (LVTTTL, SCFL, etc.), -2 V (ECL), +1.3 V (3.3 V PECL), AC-coupled


Transition Time (10–90%): <45 ps typical

Interface: DC-coupled 50 Ω reverse terminated, APC-3.5 connector

Intrinsic Clock to data delay is constant at all frequencies.


Data/ $\overline{\text{Data}}$ /Clock/ $\overline{\text{Clock}}$ Amplitudes and Offsets

0.5 min
to
2V max



Termination:

	-2V	0V	+1.3V
Maximum High Level:	0V	2.5V	2.5V
or Minimum Low Level:	-3V	-3V	-3V

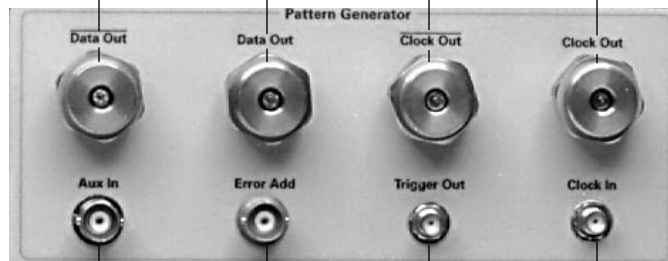

Auxiliary Input

This has two functions.

1. Blanks the data outputs to allow the user to create bursts of data
2. If in Alternating Pattern mode, used to change between 'A' and 'B' patterns

Minimum pulse width: 64 clock periods

Interface: TTL compatible, 50 Ω BNC female connector

Clock Input

Allows connection of an external clock source in order to extend the operating range of the instrument. Recommended clock sources Agilent 8648D and 83752A.

Frequency Range: 50 MHz to 3.6 GHz

Amplitude Range: +3 dBm to -3 dBm

Interface: SMA female 50 Ω , DC coupled to 0 V

Error Add Input

This allows injection of single errors by an external pulse generator into the transmitted test pattern synchronous with the rising edge of the pulse

Minimum pulse width: 64 clock periods

Interface: TTL compatible, 50 Ω BNC female connector

Trigger Output

Provides a pulse to trigger a communication analyzer etc. It has two modes:

1. Divided Clock mode: pulses at 1/8th of the clock rate.
2. Pattern mode: pulse at a settable bit position within the pattern.

Min.pulse width: (Pattern mode) 64 bits

Output levels: High -0.2 V, Low -0.9 V

Interface: 50 Ω SMA female

Error Detector

Error Detector Parameters

Operating Frequency

50 MHz to 3.6 GHz.

Test Patterns

As specified for Pattern Generator

Auto-Align

Includes synchronizing, data polarity, clock/ data align, clock invert, 0/1 threshold center.

Data In Delay

Manual Data In Delay/Auto Clock-Data Align

Threshold Setting

Manual set, Average DC level set, Auto 0/1 center

Synchronization

Manual, Automatic, Burst*, Capture*. Sync threshold adjustable from 10^{-1} to 10^{-9} .

Results

Accumulated measurements may be run once, repetitively or manual start/ stop.

Delta (instantaneous) BER always available.

Manual start/ stop

Time

Accumulate for periods from 1second to 100 days

Errors

Until at least 10/100/1000 errors

Bits

107 to 1015 bits

Results are logged periodically to the hard disk for later export (in 'CSV' format) and analysis in a PC spreadsheet program.

Result Displays

Results are displayed under the following headings.

Delta BER Results

Delta Error Ratio, Delta Error Count, Graph of BER vs Time

Accumulated Results

Bit Count, Error Ratio, Error Count, Errored One Count, Errored Zero Count, Error Free Seconds, Errored Seconds, Elapsed Accumulation Time, Sync Loss Seconds, Power Loss Seconds, Graph vs Time

Eye Results

Eye Width, Eye Height, Eye Voltage Center value, Eye Time Center value, Delta Error Ratio at Eye Center on completion of Autoalign

SYNTHESYS Error Analysis*

Graphs of Burst Lengths, Error Free Intervals, Correlation Analysis, Pattern Sensitivity Analysis, Block Analysis, Strip Chart

Audible Error Indicator

Selectable to indicate Isolated Errors, Delta Error Ratio, Errors above user-defined threshold. On/Off Volume Control. Audible pitch changes, with higher pitch corresponding to higher BER.

* Burst Mode, Capture Synch and Error Analysis coming later.

Error Detector Input/Output Specifications

Data Input

Polarity: Normal or Inverted
Input Amplitude: 0.1 to 2 V
Threshold Range: +3 to -3 V
Threshold Resolution: 0.5 mV
Terminations: Via 50Ω to -2 V, 0 V, +1.3 V
Data Input Delay Range: 0-1 bit period, or 10 ns whichever is less. 1 ps resolution
Interface: DC-coupled 50Ω, APC-3.5 female connector

Clock Input

Clock Input functions—switchable termination voltages, input frequency measurement, clock invert.
Bit Rate: 50 MHz to 3.6 GHz
Data Sampling Clock Edge: Selectable Rising or Falling
Amplitude: 0.5 to 2 V
Terminations: Via 50Ω to -2 V, 0 V, +1.3 V
Interface: DC-coupled 50Ω, APC-3.5 female



Gating Input

This is used to inhibit error counting
Minimum pulse width: 64 clock periods
Interface: TTL compatible, 50Ω BNC female connector

Error Output

Provides a pulse if one or more errors have been detected within the preceding 128 bit block.
Pulse Width: 64 bits
Output Levels: High +2.4 V, Low +0.4 V
Interface: DC-coupled, reverse terminated 50Ω BNC female connector

Marker Input

Takes in reference marker signal to provide reference for Error Correlation Analysis
Pulse width: 64 clock periods
Interface: TTL compatible, 50Ω BNC female connector

Trigger Output

Provides a pulse to trigger a communication analyzer etc. It has two modes:
 1. Divided Clock mode: pulses at 1/8th of the clock rate.
 2. Pattern mode: pulse at a fixed bit position within the pattern.
Pulse width (Pattern mode): 64 bits
Output levels: High -0.2 V, Low -0.9 V
Interface: 50Ω SMA female

External Parameters

Environmental

Warm-up time

30 minutes

Operating Temperature Range to specification

10 to 45°C

Humidity

15 to 95% at 45°C non-condensing

Electrical

Supply Voltage Parameters

90 V–250V AC, 50–60Hz

Power Consumption

<500W

EMC

EU EMC Directive (CE-Marked)

Support

Warranty

1 year


Calibration

2 year cycle, return to Agilent Technologies

Physical

Dimensions

426 W x 215 H x 527 D mm approx (16.8" W x 8.5" H x 20.7" D approx)

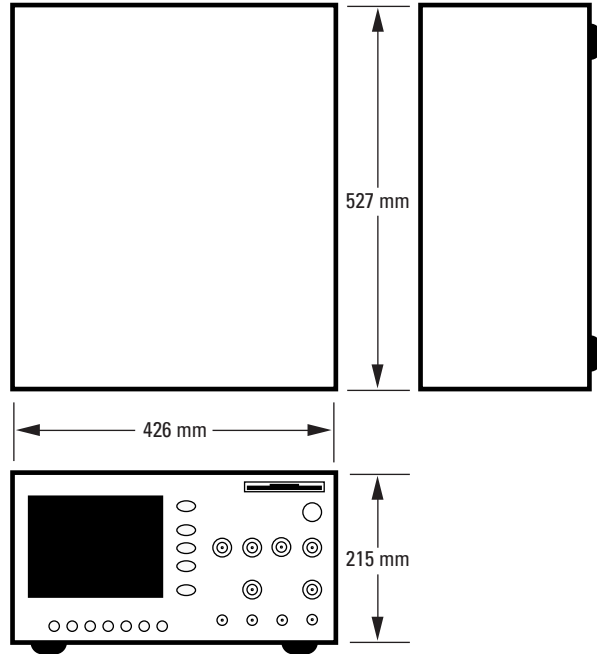

Weight

20 kg (44 lbs)

Ordering Information

- 86130A BitAlyzer** 3 Gbit/s BitAlyzer with basic error analysis features
(for 3.0 Gbit/s BER measurement and analysis with internal clock source, 3.6 Gbit/s with external clock source)
- Option 100** 2-D error mapping*
- Option 200** Error correction coding analysis*
- Option 300** Add 8648D 4.0 GHz external synthesized signal source
- Option 0B1** Hard copy programming manuals
- Option AX4** Mounting kit for 19" rack, without handles
- Option AXE** Mounting kit for 19" rack, including front handles

Recommended Product Accessories

Torque Wrench:

- 8710-1765** For APC 3.5 connectors

Cable:

- 8120-4948** 1m SMA cable

Blocking Capacitor:

- 11742A** 45 MHz to 26.5 GHz, APC-3.5 mm

Bias Network:

- 11612A** 45 MHz to 26.5 GHz, APC-3.5 mm

Attenuators:

- 8493C option 003** 3 dB APC 3.5 pad
- 8493C option 006** 6 dB APC 3.5 pad
- 8493C option 010** 10 dB APC 3.5 pad
- 8493C option 020** 20 dB APC 3.5 pad

Transition Time Convertors:

Used to slow the output waveform rise/fall times if desired. SMA male to SMA female connectors.

- 15435A** 150 ps output transition time
- 15432B** 250 ps output transition time
- 15433B** 500 ps output transition time
- 15434B** 1000 ps output transition time
- 15438A** 2000 ps output transition time

* Contact factory for availability

SuperDisk is a trademark of Imation Corp.

BitAlyzer is a registered trademark of SyntheSys Research Inc.

MS-DOS and MS-Windows are U.S. registered trademarks of Microsoft Corporation.

For more information about Agilent Technologies test and measurement products, applications, services, and for a current sales office listing, visit our web site,

<http://www.agilent.com/comms/lightwave>

You can also contact one of the following centers and ask for a test and measurement sales representative.

United States:

Agilent Technologies
Test and Measurement Call Center
P.O. Box 4026
Englewood, CO 80155-4026
(tel) 1 800 452 4844

Canada:

Agilent Technologies Canada Inc.
5150 Spectrum Way
Mississauga, Ontario
L4W 5G1
(tel) 1 877 894 4414

Europe:

Agilent Technologies
Test & Measurement
European Marketing Organisation
P.O. Box 999
1180 AZ Amstelveen
The Netherlands
(tel) (31 20) 547 9999

Japan:

Agilent Technologies Japan Ltd.
Measurement Assistance Center
9-1, Takakura-Cho, Hachioji-Shi,
Tokyo 192-8510, Japan
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:

Agilent Technologies
Latin American Region Headquarters
5200 Blue Lagoon Drive, Suite #950
Miami, Florida 33126, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:

Agilent Technologies Australia Pty Ltd
347 Burwood Highway
Forest Hill, Victoria 3131, Australia
(tel) 1-800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:

Agilent Technologies
24/F, Cityplaza One, 1111 King's Road,
Taikoo Shing, Hong Kong
(tel) (852) 3197 7777
(fax) (852) 2506 9284

Technical data subject to change
Copyright © 2000
Agilent Technologies
Printed in U.S.A. 4/00
5968-8545E



Agilent Technologies
Innovating the HP Way