


MODEL KAA4040
500 WATTS CW
10 MHz - 100 MHz

The Model KAA4040 is a Class AB wideband RF power amplifier system delivering in excess of 500 Watts CW power into a 50-Ohm load over the frequency range of 10 MHz to 100 MHz. Power gain is a minimum of 57 dB. Harmonic filtering is included.

The system features forward and reflected power indication on a front panel-mounted, analog meter; Automatic Level Control (ALC); RF gain control; overdrive protection; full VSWR protection; input blanking, and over-temperature protection. On the basic model these features, plus remote power on/off control, are accessible for hard-wire remote operation through a 25-pin, D-subminiature connector. For a detailed description of these features refer to "SPECIAL FEATURES – KAA & KAW-SERIES SINGLE BAND RF POWER AMPLIFIERS".

The system comprises a Power Controller/Power Amplifier and a Power Supply Unit. These are intended to be mounted into a standard, 19-inch equipment rack and require 12¼ inches of panel space. The units are designed to be installed on optional telescoping slides. The system operates from 187-265 V_{AC} single phase, 47-63 Hz line. The system may be placed in 'stand-by' mode with the BLANKING switch, which greatly reduces energy consumption and heat generation.

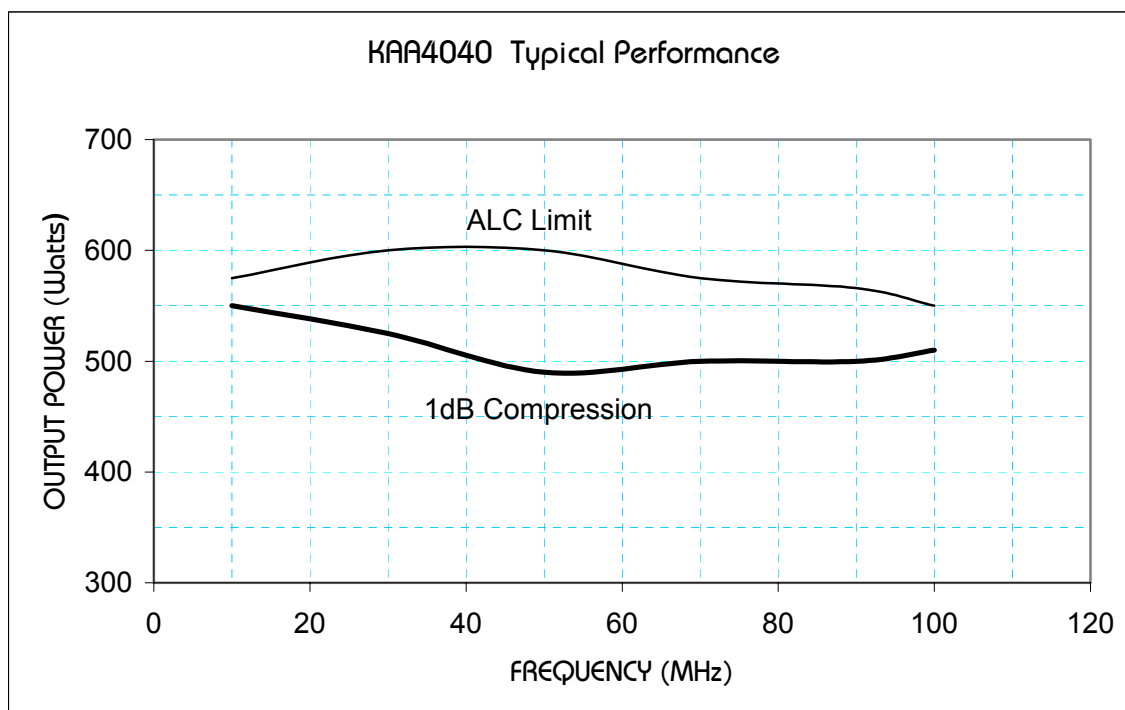

SPECIFICATIONS
Model KAA4040

RATED POWER OUTPUT	500 Watts
INPUT FOR RATED OUTPUT	1.0 mW maximum
POWER OUTPUT @ 1dB COMPRESSION	480 Watts minimum
FLATNESS	± 1.5 dB maximum unleveled, ± 0.5 dB leveled
FREQUENCY RESPONSE	10 MHz - 100 MHz instantaneously
GAIN	57 dB minimum
GAIN ADJUSTMENT RANGE	30 dB typical
INPUT /OUTPUT IMPEDANCE	50 Ohm nominal
MISMATCH TOLERANCE	infinite
PROTECTION	VSWR, over-temperature, overdrive
MODULATION CAPABILITY	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal
HARMONIC DISTORTION	-13 dBc maximum
SPURIOUS OUTPUTS	-70 dBc maximum
FRONT PANEL METER	0 - 500 Watt forward power, top scale % limit SET point reflected power, bottom scale
CONTROLS	[AC LINE]ON/OFF, [RF CTRL]ON/OFF (blanking) [METER]FLWD/REFL, [ALC]FAST/SLOW (Autom. Level Control) [VSWR]RESET MAN/AUTO, ALC, RF GAIN
INDICATORS	SYSTEM, BLANKING, [METER]MODE, [ALC] MODE, VSWR, TEMP, REMOTE ACTIVE
REMOTE INTERFACE (optional)	IEEE-488.2 & RS-232
RF CONNECTORS	Input BNC; Output 'N'
REMOTE CONTROL	IEEE488.2: 24-pin female, RS-232: 25- pin D-Subminiature female
REMOTE INTERLOCK	BNC female
OPERATING TEMPERATURE	-10 to 50 °C
COOLING	Forced air (self contained fans)
PRIMARY POWER	187 - 265 V _{rms} , 47 - 63Hz, single-phase, 3.0 kVA maximum
SIZE (W x H x D) Total with units stacked	48.3 x 31.1 x 53.3 cm, 19 x 12¼ x 21 in.
WEIGHT (Total)	48.1 kg, 106 lb.

MODEL CONFIGURATIONS

MODEL NUMBER	OPTION
KAA4040	Standard
KAA4040M1	IEEE488.2/RS232