


FREQUENCY COUNTER

MF1601A/1602A, MF1603A/1604A

0.1 mHz to 1 GHz

0.1 mHz to 3 GHz

- High resolution/fast measurement time
- Frequency/period/pulse width/totalizing
- Parts per million (ppm) display/processing
- Burst signal measurement

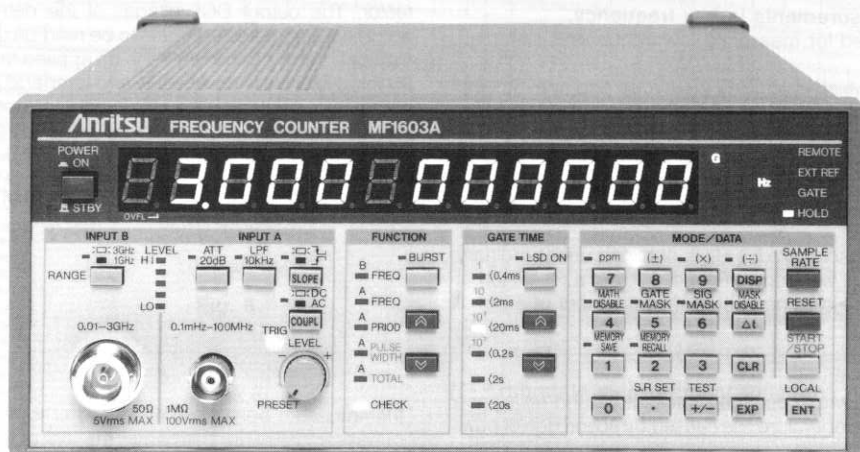

«GP-IB»
OPTION

The MF1600 series are compact and easy to operate frequency counters. We are convinced of the world highest level of their performance. The reliability and cost-performance has been upgraded by developing a new custom LSI to reduce the number of logic circuits and by using a microprocessor. Multi-functions, such as 0.1 mHz to quasi-microwave frequency measurement, period measurement, pulse width measurement, and totalizing are provided. High resolution with a fast measurement time (10 digits displayed in 1 second) for a super-wide frequency range has been achieved by using reciprocal plus vernier techniques.

Burst signal measurement and signal masking functions, and low-pass filters expand the measurability of various input waveforms.

A ppm display and arithmetic operation functions are provided to permit display of final data expressed in a most effective numerals such as ratios, deviations or in a converted unit by processing measured results.

In addition, measurement and setting conditions can be easily stored and recalled for repeat measurements.

An optional GP-IB interface enables easy configuration of automatic measurement and monitoring systems.

Features

• High-speed/high-resolution measurement

The reciprocal method, which displays the measured frequency after counting back from the input signal period, plus the vernier technique, give a high resolution with a fast measurement time (10 digits displayed in 1 second).

• Burst signal measurement

The gate is opened synchronously after confirming the input signals. Intermittent signals, such as pulse-modulated waves can be accurately measured. A 6-digit display is available even when the gate time is 0.4 ms.



• Pulse width measurement

The input signal pulse width can be measured with a 10 ns single-shot resolution. It can also be measured in the average measurement mode with 300 ps resolution. Either a width of positive or negative pulse can be measured easily by the SLOPE setting.

• Totalizing

The number of pulses between the start and stop triggers can be totalled for signals up to 100 MHz.

• Mask function

It is difficult to eliminate the chattering noise influence on measured results when measuring relay switching time and so on. Using the SIG MASK function permits period measurement irrespective noise for periods from 5 μ s to 1600 s.

For burst signal measurement, early signal fluctuations should be disregarded. The measurement start can be delayed by 1 μ s to 16 s using the GATE MASK function.

• Processing function

Results can be displayed as required data such as rotation, speed, pressure, etc. after processing by setting a combination of ppm and arithmetic processing functions.

ELECTRONIC COUNTERS, POWER METER, VOLTMETER

Specifications

Model				MF1601A	MF1602A	MF1603A	MF1604A		
Measurement Range				0.1 mHz to 1 GHz		0.1 mHz to 3 GHz			
Frequency measurement	Range	FREQ A	DC-coupled	0.1 mHz to 100 MHz					
			AC-coupled	10 Hz to 100 MHz					
			BURST	50 kHz to 100 MHz					
	FREQ B		10 MHz to 1 GHz		10 MHz to 1 GHz: (1 GHz) 0.5 to 3 GHz: (3 GHz)				
	Gate time		<0.4 ms, <2 ms, <20 ms, <0.2 s, <2 s, and <20 s, selectable. If the input signal period exceeds the above value the gate time becomes the same value.						
	Display digits		5, 6, 7, 8, 9, and 10 digits selectable, one digit added when LSD ON						
	Measurement accuracy		±1 count ±trigger error*1 ±time base accuracy*2: (FREQ A) ±1 count ±time base accuracy*2: (FREQ B) Fraction measurement error*3 added when LSD ON						
Unit display		μHz, mHz, Hz, kHz, MHz, and GHz							
Period measurement	Range		10 ns 10,000 s						
	Gate time		<0.4 ms, <2 ms, <20 ms, <0.2 s, <2 s, and <20 s, selectable. If the input signal period exceeds the above value, the gate time becomes the same value.						
	Measurement error		±1 count ±trigger error*1 ±time base accuracy*2 Fraction measurement error*3 added when LSD ON						
	Unit display		ns, μs, ms, s, and ks						
Pulse width measurement	Range		20 ns to 10,000 s						
	Magnifying power (N)		1, 10, 10 ² , and 10 ³						
	Time unit		10 ns						
	Measurement error		±1 count ±(trigger error*1/√N) ±time base accuracy*2						
	Unit display		ns, μs, ms, s, and ks						
Totalizing	Range		DC to 100 MHz						
	Counting capacity		0 to (10 ¹¹ - 1)						
Input	Input A	Sensitivity		10 mVrms (sinusoidal wave) 30 mVp-p (minimum pulse width: 5 ns)					
		Maximum allowable level		(ATT 20 dB) OFF: 10 Vrms (≤ 10 kHz), 1 Vrms (≤ 100 MHz), 0.5 Vrms (BURST) (ATT 20 dB) ON: 100 Vrms (≤ 10 kHz), 10 Vrms (≤ 100 MHz), 5 Vrms (BURST)					
		Trigger level		Approx. -1.5 to +1.5 V continuously adjustable, PRESET: Approx. 0 V, (ATT 20 dB) ON: Approx. -15 to +15 V continuously adjustable					
		Coupling		AC/DC switchable					
		Trigger slope		+/- switchable					
		Low-pass filter		Cut-off frequency: 10 kHz, ON/OFF switchable					
		Connector/impedance		BNC-type, ≥ 1 MΩ ≤ 25 pF					
Input B	Voltage range		10 mVrms to 5 Vrms (BURST): Max. 0.5 Vrms		10 mVrms to 5 Vrms (≤ 2.8 GHz) 30 mVrms to 5 Vrms (≤ 3 GHz) (BURST): Max. 0.5 Vrms				
	Coupling		AC		AC				
	Connector/impedance		BNC-type, 50 Ω		N-type, 50 Ω				
Common	Reference oscillator	Frequency		10 MHz					
		Starting Characteristics		≤ 5 × 10 ⁻⁸ /day (30 min. after power-on)					
		Aging rate*4		≤ 2 × 10 ⁻⁸ /day (after 24-hour operation)					
		Temperature characteristics		± 5 × 10 ⁻⁸ (25° ± 25°C)					
		External output		10 MHz, ≥ 2 Vp-p (open), BNC connector on rear, Internal impedance: ≤ 400 Ω					
		External input		1, 2, 5 or 10 MHz, 2 to 5 Vp-p, BNC connector on rear, Input impedance: ≥ 100 Ω					
	Calculation function		Sum, difference, product, and quotient of measured and set values, and ppm display						
	Mask function		Signal rejection within set period and measurement start delay settings						
	Memory function		Save/recall nine panel setting conditions						
	Display		11 digits, seven-segment green LED						
	Sample rate		Approx. 80 ms, 0.2 s, 2 s, and HOLD, selectable Approx. 20 ms to 9999 minutes setting available						
	Power		AC85 to 132 V or AC170 to 250 V, 50/60 Hz, ≤ 45 VA (at starting: ≤ 50 VA)						
	Dimensions and weight		88H × 213W × 351D mm, < 5 kg						
			—		DC +10 to 30 V		—		DC +10 to 30 V

Continued on next page

ELECTRONIC COUNTERS, POWER METER, VOLTMETER

*1 On sinusoidal wave input of: Where, signal period is T (s), signal amplitude is Es (Vo-p), and noise peak value at 100 MHz bandwidth is En (Vo-p)

$$T \times \frac{(1.75 \times 10^{-4} + 0.32 \times E_n)}{E_s} \text{ (s)}$$

*2 Calibration is made after 24-hour operation, at $23^\circ \pm 5^\circ\text{C}$; the time base accuracy becomes $(2 \times 10^{-8} / \text{day}) \times \text{input signal frequency}$.

*3 At frequency measurement: $(1 \text{ ns/real gate time}) \times \text{input signal frequency}$

At period measurement: $(1 \text{ ns/real gate time}) \times \text{input signal period}$

The real gate time is varied by the input signal and 20 to 85% of the panel display.

*4 The standard model aging rate is $\leq 4 \times 10^{-8} / \text{week}$, $\leq 8 \times 10^{-8} / \text{month}$, and $\leq 1 \times 10^{-7} / \text{year}$.

Options

Option 01 Reference Oscillator	Aging rate: After 24-hour operation, $\leq 5 \times 10^{-9} / \text{day}$ ($\leq 5 \times 10^{-8} / \text{month}$ and $\leq 7.5 \times 10^{-8} / \text{year}$) Temperature characteristics: $\pm 5 \times 10^{-8}$ ($25^\circ \pm 25^\circ\text{C}$)
Option 02 Reference Oscillator	Aging rate: After 24-hour operation, $\leq 2 \times 10^{-9} / \text{day}$ ($\leq 3 \times 10^{-8} / \text{month}$ and $\leq 4.5 \times 10^{-8} / \text{year}$) Temperature characteristics: $\pm 1.5 \times 10^{-8}$ ($25^\circ \pm 25^\circ\text{C}$)
Option 03 Reference Oscillator	Aging rate: After 48-hour operation, $\leq 5 \times 10^{-10} / \text{day}$ ($\leq 1 \times 10^{-8} / \text{month}$ and $\leq 1.5 \times 10^{-8} / \text{year}$) Temperature characteristics: $\pm 5 \times 10^{-9}$ ($25^\circ \pm 25^\circ\text{C}$)
Option 06 GP-IB Interface	IEEE STD 488 Interface functions: SH1, AH1, T5, L4, SR1, RL1, PP0, DC1, DT1, and C0

Ordering information

Please specify model/order number, name and quantity when ordering.

Model/Order No.	Name	Remarks
MF1601A MF1602A MF1603A MF1604A	Main frame Frequency Counter Frequency Counter Frequency Counter Frequency Counter	0.1 mHz to 1 GHz 0.1 mHz to 1 GHz 0.1 mHz to 3 GHz 0.1 mHz to 3 GHz
J0127A J0017 J0266 J0474 F0010 F0042 F0043 F0046 W0458AE W0458BE W0459AE W0459BE	Standard accessories Coaxial Cable, 1 m: 1 pc Power Cord, 2.5 m: 1 pc Adaptor: 1 pc Power Cord (for DC Operation): 1 pc Fuse, 1.6 A: 2 pcs Fuse, 0.8 A: 1 pc Fuse, 1 A: 1 pc Fuse, 3.15 A: 2 pcs MF1601A/1602A Operation Manual: 1 copy MF1601A/1602A Service Manual: 1 copy MF1603A/1604A Operation Manual: 1 copy MF1603A/1604A Service Manual: 1 copy	BNC-P•RG-58A/U•BNC-P 3-pole to 2-pole MF1602A/1604A only T1.6A250V MF51NN250V0.8ADC01 (MF1601A/1603A only) MF51NN250V1ADC01 MF51NN250V3.15ADC01 (MF1602A/1604A only) For MF1601A/1602A For MF1601A/1602A For MF1603A/1604A For MF1603A/1604A
MF160□A-01 MF160□A-02 MF160□A-03 MF160□A-06	Options Reference Oscillator Reference Oscillator Reference Oscillator GP-IB Interface	Aging rate: $\leq 5 \times 10^{-9} / \text{day}$ Aging rate: $\leq 2 \times 10^{-9} / \text{day}$ Aging rate: $\leq 5 \times 10^{-10} / \text{day}$
MH648A MZ5004A	Peripheral instruments Pre-Amplifier Battery Pack/Charger	100 kHz to 1200 MHz For MF1602A/1604A
J0025A J0025C J0054A J0104A J0001 J0040 J0395 MP613A MP526C MP526D J0007 J0008 Z0140 B0270 B0271 B0272 B0273 B0274A B0274C B0026 Z0152	Optional accessories Coaxial Cable, 1 m Coaxial Cable, 2 m Coaxial Cable, 1 m Coaxial Cable, 1 m Probe Coaxial Adaptor High-Power Fixed Attenuator RF Fuse Element High-Pass Filter High-Pass Filter GP-IB Cable, 1 m GP-IB Cable, 2 m Battery Carrying Bag (small) Carrying Bag (big) Carrying Case (small) Carrying Case (big) Rack Mount Kit Rack Mount Kit Protective Cover Service Kit	S-5DWP•5D2W•S-5DWP S-5DWP•5D2W•S-5DWP 3CA-P2•RG-58A/U•Alligator clips BNC-P•RG-55/U•N-P For transmitter, 10 kHz to 30 MHz N-P•BNC-J 30 dB, 30 W, N-type, DC to 9 GHz 5 pcs/pack For 250 MHz band For 400 MHz band 408JE-101 408JE-102 For MZ5004A, 2 pcs/set For frequency counter only With battery pack/charger For frequency counter only With battery pack/charger IEC3U (with handles) JIS, 149H mm (without handles)