

Agilent FieldFox Handheld Analyzers

4/6.5/9/14/18/26.5 GHz

Data Sheet

N9913A

N9914A

N9915A

N9916A

N9917A

N9918A

N9925A

N9926A

N9927A

N9928A

N9935A

N9936A

N9937A

N9938A



This data sheet provides the specified and typical performance of the FieldFox family of portable analyzers. This data sheet should be used in conjunction with the technical overviews and configuration guide, for a complete description of the analyzers.

Carry precision with you.

Anticipate — Accelerate — Achieve



Agilent Technologies

Table of contents

| | |
|---|----|
| Cable and antenna analyzer and vector network analyzer..... | 3 |
| Time domain, Option 010..... | 15 |
| Vector voltmeter (VVM), Option 308 | 16 |
| Spectrum analyzer | 17 |
| Tracking generator or independent source | 23 |
| Spectrum analyzer IF output..... | 24 |
| AM/FM tune and listen..... | 24 |
| Preamplifier, Option 235 | 24 |
| Interference analyzer and spectrogram, Option 236 | 24 |
| Reflection measurements (RL, VSWR), Option 320..... | 25 |
| Built-in power meter, Option 310..... | 26 |
| External USB power sensor support, Option 302..... | 26 |
| Built-in GPS receiver, Option 307..... | 26 |
| DC bias variable-voltage source, Option 309 | 27 |
| General information..... | 27 |

Cable and antenna analyzer and vector network analyzer

The performance listed in this section applies to the cable and antenna analyzer (referred to as CAT) and vector network analyzer (VNA) capabilities available in the following models (may require options – see configuration guide):

FieldFox microwave combination analyzers: **N9913A, N9914A, N9915A, N9916A, N9917A, N9918A**

FieldFox microwave vector network analyzers: **N9925A, N9926A, N9927A, N9928A**

Specification (spec)

Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions. Warranted performance. FieldFox must be within its calibration cycle. No warm-up required for the specifications listed on pages 3 through 7.

Typical

Expected performance of an average unit; does not include guardbands. It is not covered by the product warranty. FieldFox must be within its calibration cycle.

Nominal

A general, descriptive term or design parameter. It is not tested, and not covered by the product warranty. FieldFox must be within its calibration cycle.

| Models | Frequency range |
|----------------|--------------------|
| N9913A | 30 kHz to 4 GHz |
| N9914A | 30 kHz to 6.5 GHz |
| N9915A, N9925A | 30 kHz to 9 GHz |
| N9916A, N9926A | 30 kHz to 14 GHz |
| N9917A, N9927A | 30 kHz to 18 GHz |
| N9918A, N9928A | 30 kHz to 26.5 GHz |

| Frequency reference | -10 to 55 °C |
|--|---|
| Accuracy | ± 0.7 ppm (spec) + aging ± 0.4 ppm (typical) + aging |
| Accuracy, when locked to GPS | ± 0.010 ppm (spec) |
| Accuracy, when GPS antenna is disconnected | ± 0.2 ppm (nominal) ¹ |
| Aging rate | ± 1 ppm/yr for 20 years (spec), will not exceed ± 3.5 ppm |

| Frequency resolution | Spec |
|----------------------|---------|
| Frequency ≤ 5 GHz | 1 Hz |
| Frequency ≤ 10 GHz | 1.34 Hz |
| Frequency ≤ 20 GHz | 2.68 Hz |
| Frequency ≤ 26.5 GHz | 5.36 Hz |

| | |
|----------------------------------|---|
| Data points or resolution | 101, 201, 401, 601, 801, 1001, 1601, 4001, 10,001 Arbitrary number of points settable through SCPI |
| IF bandwidth² | 10 Hz, 30 Hz, 100 Hz, 300 Hz, 1 kHz, 3 kHz, 10 kHz, 30 kHz, 100 kHz |
| System impedance | 50 ohm (nominal), 75 ohm with appropriate adapter and calibration kit |

¹ The maximum drift expected in the frequency reference applicable when the ambient temperature changes ± 5 °C from the temperature when the GPS signal was last connected.

² VNA mode only. Recommend using averaging in CAT mode.

| Test port output power | | Port 1 or port 2, high power, 23 ± 5 °C | |
|---|---|---|--|
| Frequency | Typical | Nominal | |
| 30 kHz to 300 kHz | -11 dBm | | |
| > 300 kHz to 2 MHz | -3 dBm | -2 dBm | |
| > 2 MHz to 625 MHz | -2 dBm | -1 dBm | |
| > 625 MHz to 3 GHz | +1 dBm | +3 dBm | |
| ≥ 3 to 6.5 GHz | -1 dBm | +1 dBm | |
| ≥ 6.5 to 9 GHz | -2 dBm | 0 dBm | |
| ≥ 9 to 14 GHz | -4 dBm | -2.5 dBm | |
| ≥ 14 to 18 GHz | -6 dBm | -4.5 dBm | |
| ≥ 18 to 23 GHz | -10 dBm | -8.5 dBm | |
| ≥ 23 to 26.5 GHz | -12 dBm | -11 dBm | |
| Power level accuracy | ± 1.5 dB at -15 dBm, typical | | |
| Power range | CAT: High, low and manual. Low power is -45 dBm, nominal. Default power is high. VNA: High, low and manual. Low power is -45 dBm, nominal. Default power is manual power of -15 dBm. | | |
| Power step size | Power settable in 1 dB steps across power range. Flat power, in 1 dB steps, is available across the whole frequency span, nominal. | | |
| System dynamic range | | Port 1 or port 2, high power, 100 Hz IF bandwidth, 100 point average, -10 to 55 °C | |
| Frequency | Spec | Typical | |
| > 300 kHz to 9 GHz ¹ | 95 dB | 100 dB | |
| ≥ 9 to 14 GHz | 91 dB | 97 dB | |
| ≥ 14 to 18 GHz | 90 dB | 94 dB | |
| ≥ 18 to 20 GHz | 87 dB | 90 dB | |
| ≥ 20 to 25 GHz | 74 dB | 79 dB | |
| > 25 to 26.5 GHz | 65 dB | 70 dB | |
| Trace noise | | Port 1 or port 2, high power, 300 Hz IF bandwidth, spec, -10 to 55 °C | |
| Frequency | Magnitude | Phase | |
| ≤ 300 kHz | ± 0.003 dB (rms) | ± 0.020 degrees | |
| > 300 kHz to 10 GHz | ± 0.002 dB (rms) | ± 0.014 degrees | |
| > 10 to 20 GHz | ± 0.004 dB (rms) | ± 0.027 degrees | |
| > 20 to 26.5 GHz | ± 0.010 dB (rms) | ± 0.066 degrees | |
| Temperature stability | | Nominal | |
| Magnitude | ± 0.018 dB/°C ≤ 15 GHz, ± 0.08 dB/°C > 15 GHz | | |
| Receiver compression | | Port 1 or port 2, typical, 23 ± 5 °C | |
| 500 MHz to 1 GHz | +10 dBm, 0.15 dB compression | | |
| > 1 GHz to 26.5 GHz | +10 dBm, 0.10 dB compression | | |
| Port 1 or port 2 maximum input level | | | |
| Average CW power | +27 dBm, 0.5 watts | | |
| DC | ± 50 VDC | | |
| Immunity to interfering signals | +16 dBm (nominal) | | |

¹ <300 kHz: 63 dB nominal; 2 MHz to 9 MHz: 85 dB spec, 90 dB typical

| Measurement speed | |
|---|---|
| Includes hardware sweep time, re-trace and display update. | |
| CAT | |
| Return loss, 30 kHz to 26.5 GHz, 1-port cal, 1001 points | 850 μ s/pt |
| Distance-to-fault, 100 meter cable, 1-port cal, 1001 points | 850 μ s/pt |
| VNA | |
| S11 and S21, 30 kHz to 26.5 GHz, enhanced response cal, 100 kHz IF bandwidth, 1001 points | 850 μ s/pt |
| Measurements | |
| CAT | Distance-to-fault (dB), return loss, VSWR, distance-to-fault (VSWR), cable loss (1-port), insertion loss (2-port) ¹ , distance-to-fault (linear or Rho) |
| VNA T/R | S11, S21 ² |
| VNA S-parameters | S11, S21, S22, S12 ³ |
| Number of traces | Four traces available, Tr1, Tr2, Tr3, Tr4 |
| Display formats | Single-trace Dual-trace overlay (both traces on one graticule) Dual-trace split (each trace on separate graticule) Three-trace split (each trace on separate graticule) Quad-trace split (each trace on separate graticule) |
| Trace formats | Log magnitude, linear magnitude, VSWR, phase, Smith chart, polar, group delay, unwrapped phase, real impedance, imaginary impedance |
| Frequency settings | Start, stop, center, span |
| Frequency sweep type | Linear |
| Sweep trigger | Continuous, single |
| CAT mode distance-to-fault settings | Start distance, stop distance. Units: meters or feet |
| Sweep time | Set sweep time in seconds |
| Averaging | Sweep and point averaging 2 to 1000 |
| Smoothing | 0.25 to 25% of trace width Computes the moving average of adjacent data points. Smoothing aperture defines the trace width (number of points) to be averaged. |
| Group delay | |
| Aperture (selectable) | Frequency span / (number of points -1) |
| Maximum aperture | 25% of frequency span |
| Minimum delay | Limited to measuring no more than 180 degrees of phase change within the minimum aperture. |
| Electrical delay | 0 to 10 seconds |

¹ All measurements standard on N991xA analyzers except insertion loss (2-port). Insertion loss (2-port) requires Option 210.

All measurements available on N992xA analyzers with Option 305.

² Standard on N992x VNAs. Option 210 required on N991xA analyzers.

³ Option 211 required to obtain all four S-parameters.

Measurements *continued*



| | |
|----------------------------|---|
| Port extension | For both port 1 and port 2, delay settings. Port extensions apply to all measurements. |
| Title | Add custom titles to the display |
| Display data | Display data, memory, data and memory, or data math One memory trace per data trace. Total of 4 memory traces |
| Trace math | Vector division or subtraction of current linear measurement values and memory data |
| Scale | Autoscale, scale, reference level, reference position Autoscale: Automatically selects scale resolution and reference value to center the trace. Autoscale all: Scales all visible traces. |
| Display range | Start, stop, center, span |
| Return loss, log magnitude | -1000 to 1000 dB |
| Log magnitude resolution | 0.01 dB |
| Phase | -180 to +180 degrees (unwrapped phase can show larger values) |
| Phase resolution | 0.01 degrees |
| Phase offset | -360 to +360 degrees |
| VSWR | 1.01 to 1000 |
| VSWR resolution | 0.01 |
| Data markers | Each trace has six independent markers that can be displayed simultaneously. Delta markers are available for each marker. |
| Marker formats | Default marker format is the trace format. In Smith chart or polar format, [Real + Imag] or [Mag and Phase] formats are also available. |
| Marker functions | Peak, Next Peak, Peak Left, Peak Right, Mkr→ Center, Mkr→Delay, Min Search, Peak Excursion, Peak Threshold, Target, Bandwidth (BW, Q, Loss), Tracking CAT mode only: Tracking 3 peaks (CAT mode), Marker→ Start distance, Marker→ Stop distance |
| Marker table | On/Off |
| Marker types | Normal, delta, data trace and memory trace markers |
| Marker coupling | On/Off (coupling between traces) |

| Calibration types | |
|--|---|
| CalReady, 1-port | Each FieldFox has a highly accurate calibration at the test port, at room temperature, traceable to national standards labs. |
| QuickCal, 1-port | Uses internal and a subset of external standards. Optimum error correction with Type-N and 7/16 connectors, and up to 18 GHz. |
| SOL, 1-port | Traditional short, open and load 1-port calibration for reflection measurements. |
| Frequency response | Simultaneous magnitude and phase correction of frequency response errors for either reflection or transmission measurements. |
| Enhanced response (also known as one-path, two-port) | Corrects for frequency response and source match for transmission measurements, and reflection frequency response, directivity and source match for reflection measurements. Partial correction for load match for low-loss reciprocal devices. |
| CalReady, 2-port | Full 12-term error correction at test port, at room temperature. Highly accurate calibration, traceable to national standards labs. |
| QuickCal, 2-port | Full 12-term error correction using internal and a subset of external standards. Optimum error correction with Type-N and 7/16 connectors, and up to 18 GHz. |
| SOLT or offset short, 2-port | Traditional short, open, load and thru (or using offset short standards) for calibration. Full 12-term error correction. |
| QSOLT calibration, 2-port | Full 12-term error correction. Requires fewer connections, compared to traditional SOLT (4 compared to 7). Applicable to insertable devices. |
| Unknown thru calibration, 2-port | Full 12-term error correction. Applicable to both insertable and non-insertable devices. Easily characterize non-insertable devices such as Type-N to 3.5 mm, or female-female devices with unknown thru calibration. |
| Guided calibration wizard | FieldFox's calibration wizard recommends a calibration type and calibration kit based on selected parameters and connector types. Alternatively, users can select their own calibration type and calibration kit. |
| Interpolated error correction | With any type of accuracy enhancement applied, interpolated mode recalculates the error coefficients when the test frequencies are changed. The number of points can be increased or decreased and the start/stop frequencies can be changed, but the resulting frequency span must be a subset of the original calibration frequency span. |
| Connectors | Type-N 50 ohm, Type-N 75 ohm, 7/16, TNC, 3.5 mm, 2.4 mm, waveguide bands: X-band WR-90, P-band WR-62, K-band WR-42 Custom coaxial or waveguide calibration kits can be added to any FieldFox analyzer. |
| Distance-to-fault | |
| Range | Range = velocity factor x speed of light x (number of points -1) / frequency span x 2 Number of points auto coupled according to start and stop distance entered. |
| Range resolution | Resolution = range / (number of points -1) Number of points settable by user |
| Transform modes | Bandpass, low-pass |
| Window types | Maximum, medium, and minimum |
| Alias-free range indicator for bandpass mode | On/Off |
| Dispersion compensation | Yes |



Corrected measurement uncertainty

Power level of -15 dBm, 10 Hz IF bandwidth, no averaging, and 30-minute warm-up time. Includes uncertainties due to drift, noise, compression, and dynamic accuracy. Coverage factor of x1 applied to uncertainties, for ease of comparison with other industry handheld analyzers.

CalReady, Type-N test ports; applies to N9913/4/5/6/7A and N9925/6/7A¹

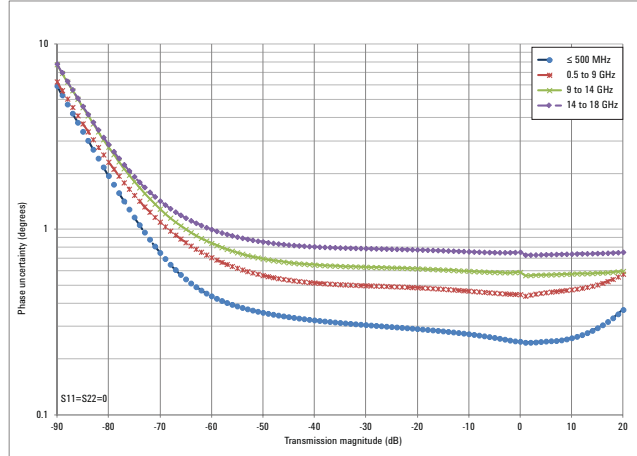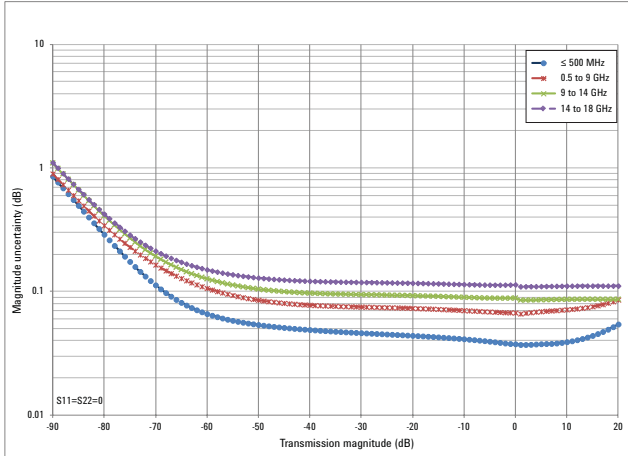

Transmission uncertainty

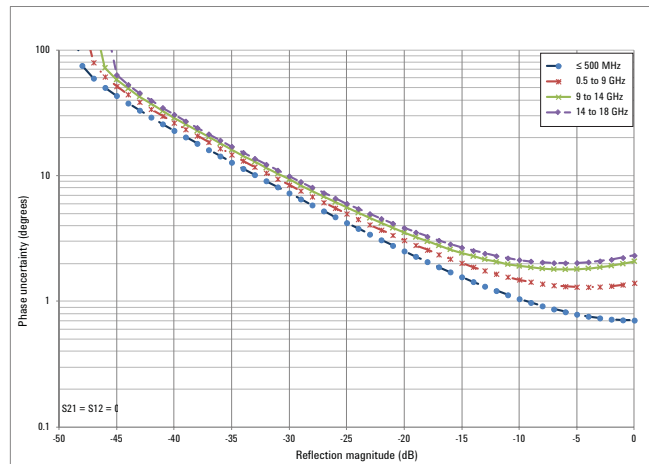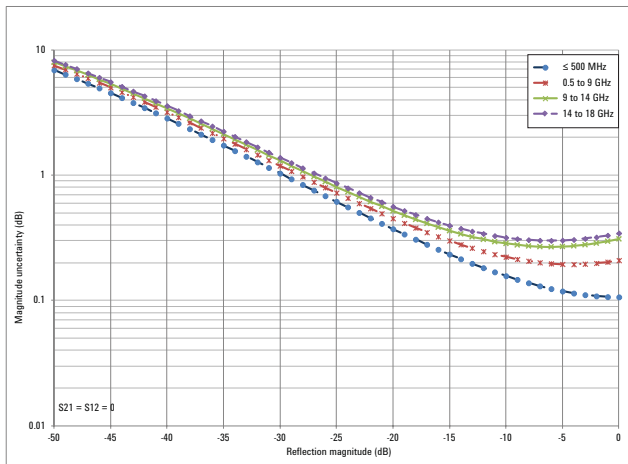

Reflection uncertainty



¹ Uncertainties shown based on a factory calibration using data-based calibration kits.

Corrected measurement uncertainty



Power level of -15 dBm, 10 Hz IF bandwidth, no averaging, and 30-minute warm-up time. Includes uncertainties due to drift, noise, compression, and dynamic accuracy. Coverage factor of x1 applied to uncertainties, for ease of comparison with other industry handheld analyzers.

Full 2-port calibration, 85518A or 85519A Type-N (m) 4-in-1 calibration kit, spec

| Corrected performance | ≤ 0.5 GHz | 0.5 to 2 GHz | 2 to 9 GHz | 9 to 18 GHz |
|-----------------------|-----------|--------------|------------|-------------|
| Directivity | 44 dB | 42 dB | 35 dB | 32 dB |
| Source match | 37 dB | 36 dB | 33 dB | 30 dB |
| Load match | 38 dB | 37 dB | 31 dB | 27 dB |
| Reflection tracking | ± 0.05 dB | ± 0.06 dB | ± 0.07 dB | ± 0.1 dB |
| Transmission tracking | ± 0.07 dB | ± 0.1 dB | ± 0.18 dB | ± 0.5 dB |

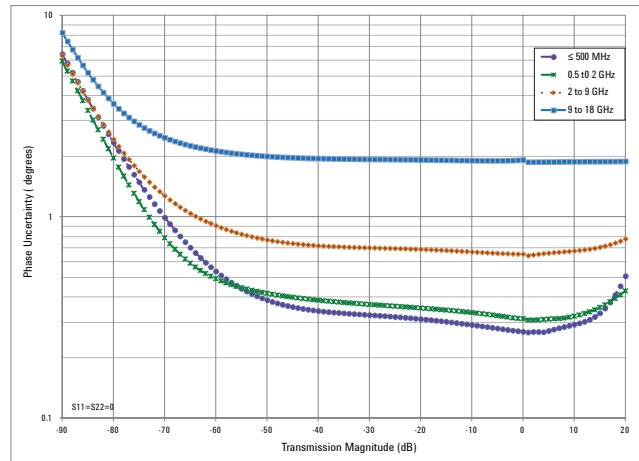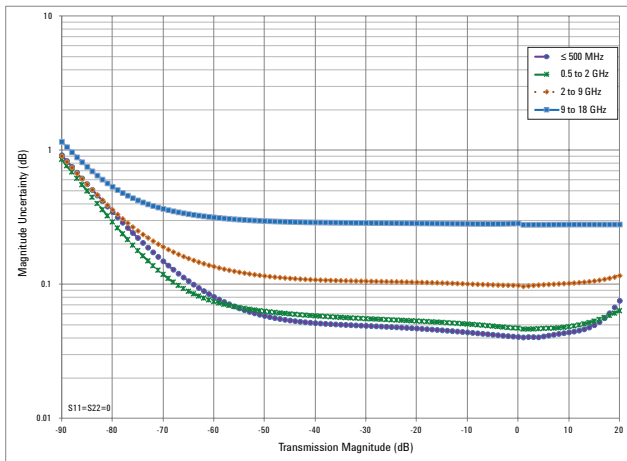

Transmission uncertainty

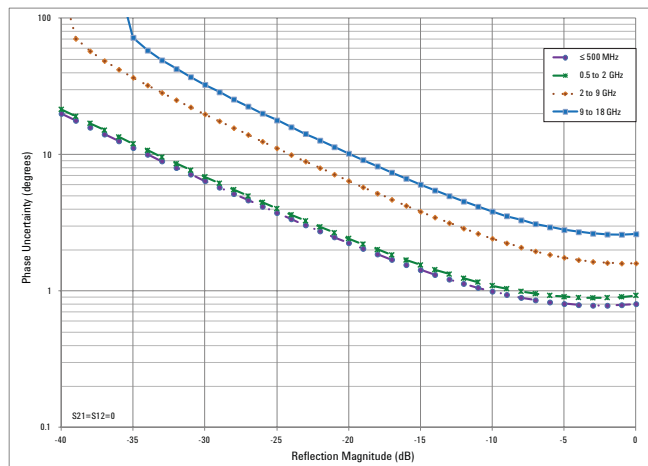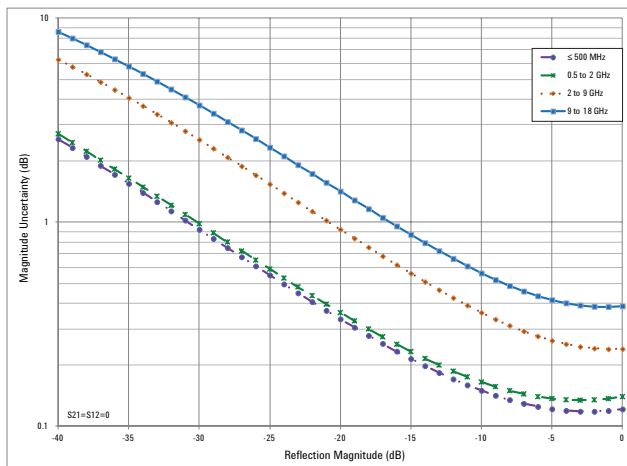



Reflection uncertainty

Corrected measurement uncertainty



Power level of -15 dBm, 10 Hz IF bandwidth, no averaging, and 30-minute warm-up time. Includes uncertainties due to drift, noise, compression, and dynamic accuracy. Coverage factor of x1 applied to uncertainties, for ease of comparison with other industry handheld analyzers.

Full 2-port calibration, 85054D Type-N (m) calibration kit, spec

| Corrected performance | ≤ 0.5 GHz | 0.5 to 2 GHz | 2 to 8 GHz | 8 to 18 GHz |
|-----------------------|------------|--------------|------------|-------------|
| Directivity | 40 dB | 40 dB | 36 dB | 34 dB |
| Source match | 38 dB | 33 dB | 33 dB | 27 dB |
| Load match | 37 dB | 35 dB | 32 dB | 27 dB |
| Reflection tracking | ± 0.006 dB | ± 0.006 dB | ± 0.009 dB | ± 0.027 dB |
| Transmission tracking | ± 0.08 dB | ± 0.1 dB | ± 0.15 dB | ± 0.43 dB |

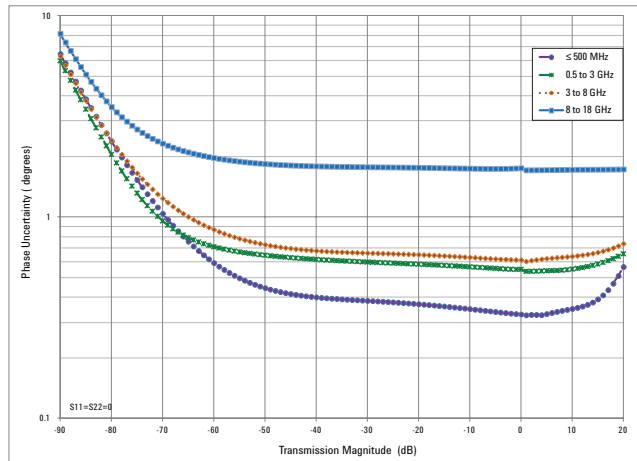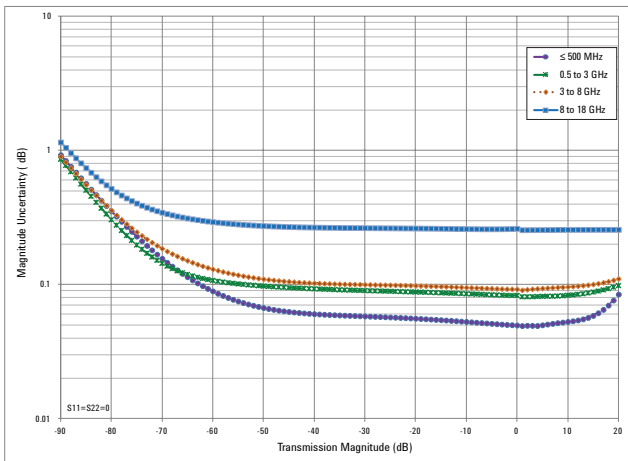

Transmission uncertainty

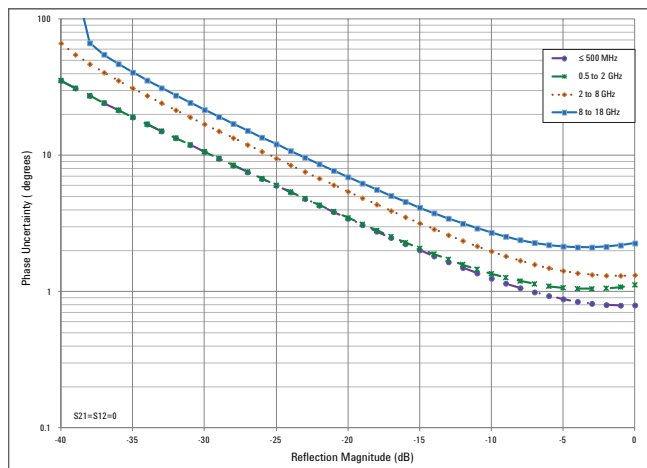
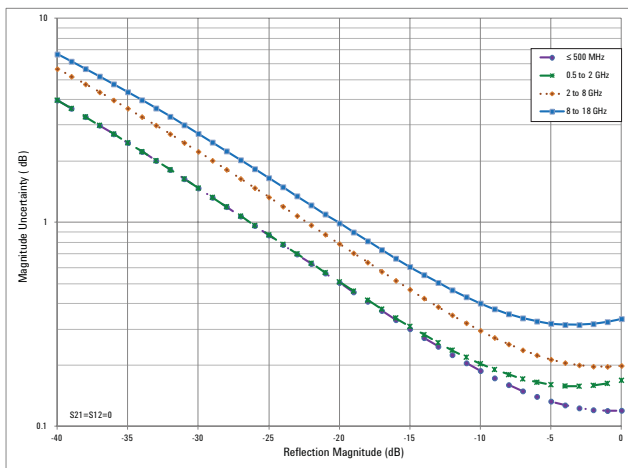


Reflection uncertainty



Corrected measurement uncertainty

Power level of -15 dBm, 10 Hz IF bandwidth, no averaging, and 30-minute warm-up time. Includes uncertainties due to drift, noise, compression, and dynamic accuracy. Coverage factor of x1 applied to uncertainties, for ease of comparison with other industry handheld analyzers.

Full 2-port QuickCal calibration with load, Type-N (m) device¹

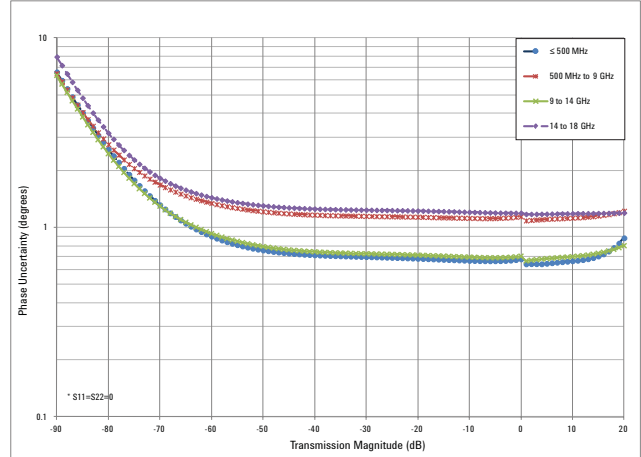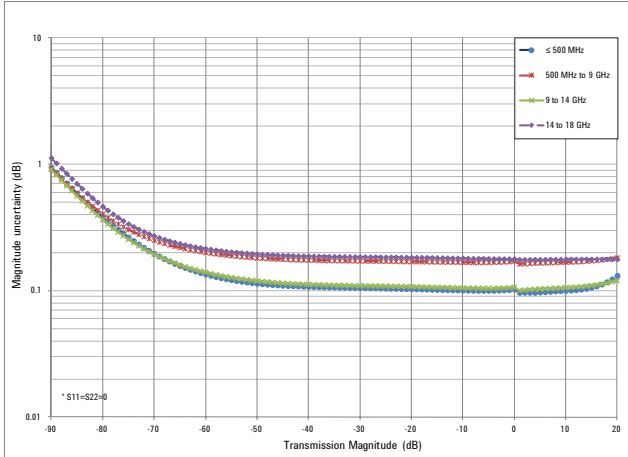

Transmission uncertainty

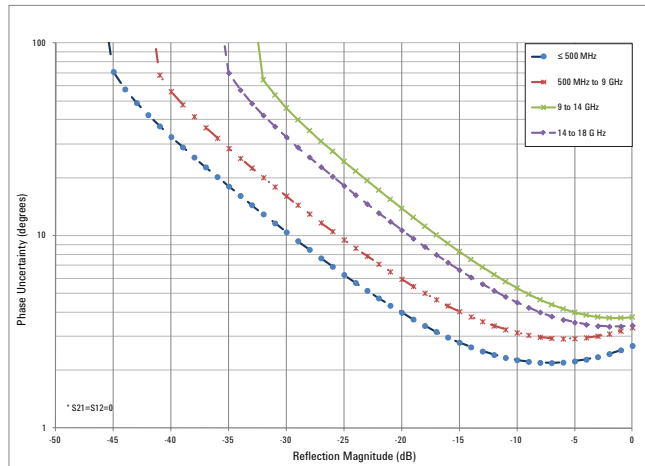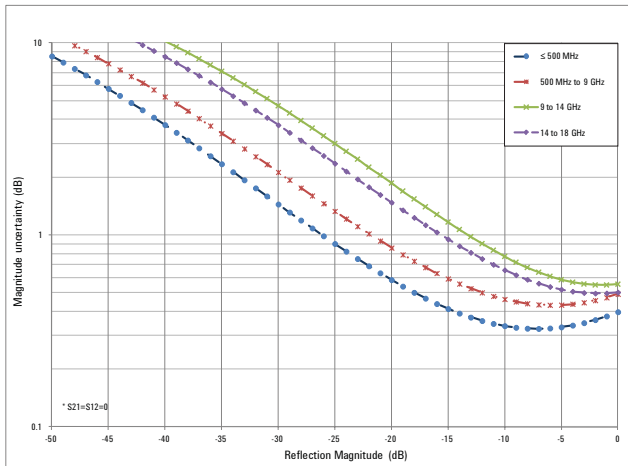



Reflection uncertainty

¹ Uncertainties shown based on a factory calibration using data-based calibration kits.



Corrected measurement uncertainty

Power level of -15 dBm, 10 Hz IF bandwidth, no averaging, and 30-minute warm-up time. Includes uncertainties due to drift, noise, compression, and dynamic accuracy. Coverage factor of x1 applied to uncertainties, for ease of comparison with other industry handheld analyzers.

CalReady, 3.5 mm test ports; applies to N9918A, N9928A¹

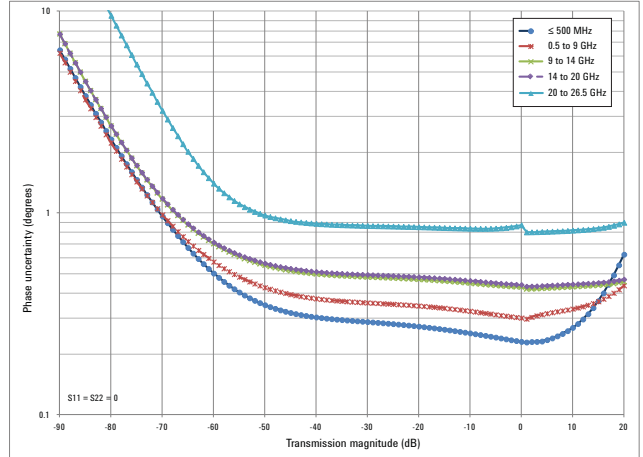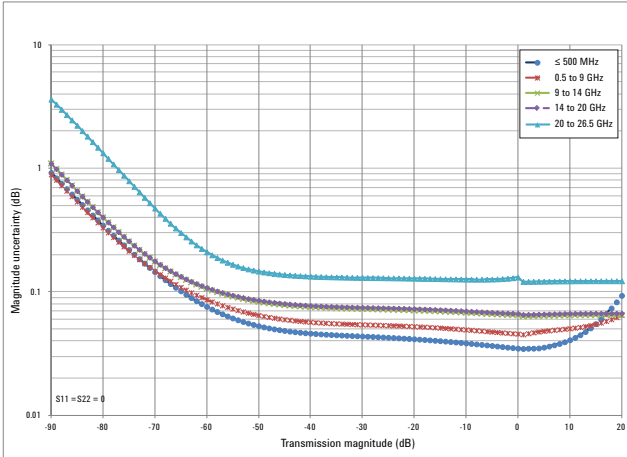

Transmission uncertainty

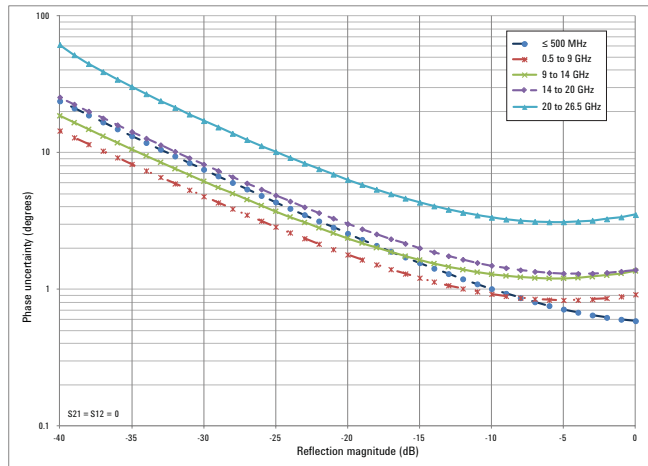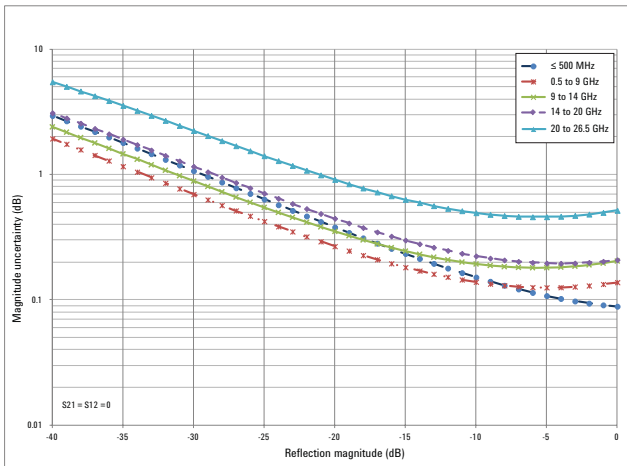

Reflection uncertainty



¹ Uncertainties shown based on a factory calibration using data-based calibration kits.

Corrected measurement uncertainty



Power level of -15 dBm, 10 Hz IF bandwidth, no averaging, and 30-minute warm-up time. Includes uncertainties due to drift, noise, compression, and dynamic accuracy. Coverage factor of x1 applied to uncertainties, for ease of comparison with other industry handheld analyzers.

Full 2-port calibration, 85520A or 85521A 3.5 mm (m) 4-in-1 OSLT calibration kit, spec

| Corrected performance | ≤ 0.5 GHz | 0.5 to 9 GHz | 9 to 18 GHz | 18 to 26.5 GHz |
|-----------------------|------------|--------------|-------------|----------------|
| Directivity | 42 dB | 36 dB | 32 dB | 32 dB |
| Source match | 37 dB | 30 dB | 28 dB | 27 dB |
| Load match | 37 dB | 30 dB | 28 dB | 24 dB |
| Reflection tracking | ± 0.035 dB | ± 0.13 dB | ± 0.14 dB | ± 0.21 dB |
| Transmission tracking | ± 0.07 dB | ± 0.29 dB | ± 0.33 dB | ± 0.52 dB |

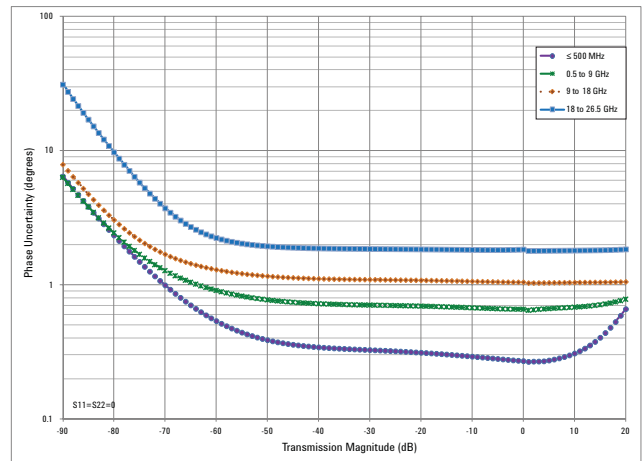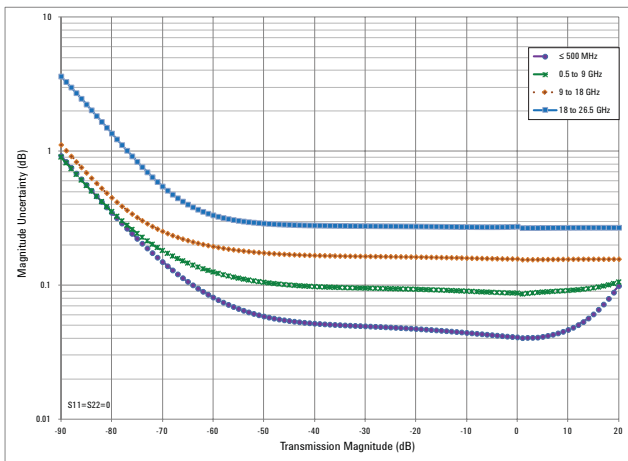

Transmission uncertainty

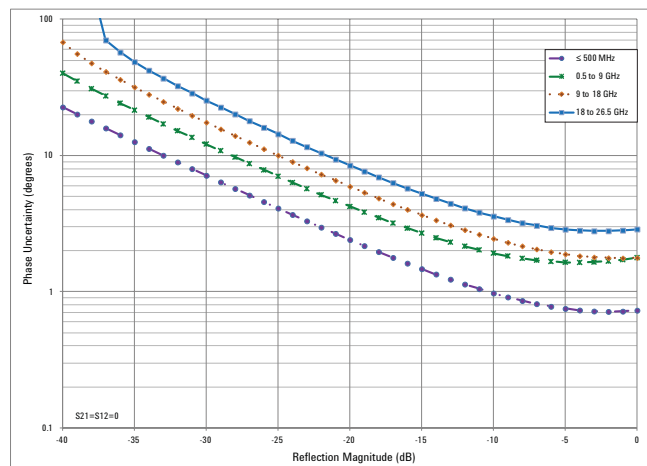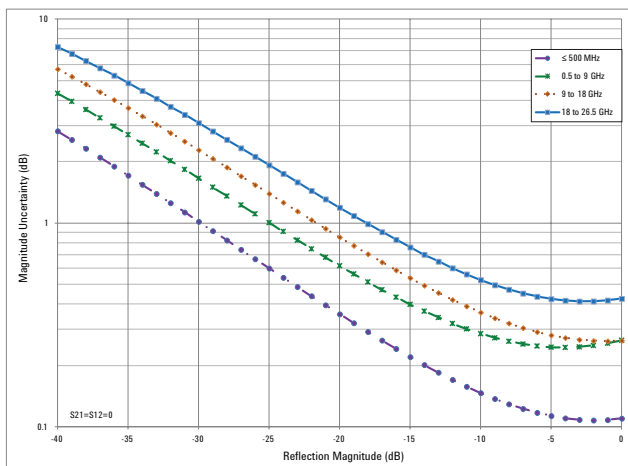



Reflection uncertainty

Corrected measurement uncertainty



Power level of -15 dBm, 10 Hz IF bandwidth, no averaging, and 30-minute warm-up time. Includes uncertainties due to drift, noise, compression, and dynamic accuracy. Coverage factor of x1 applied to uncertainties, for ease of comparison with other industry handheld analyzers.

Full 2-port calibration, 85052D 3.5 mm calibration kit, spec

| Corrected performance | ≤ 0.5 GHz | 0.5 to 8 GHz | 8 to 20 GHz | 20 to 26.5 GHz |
|-----------------------|------------|--------------|-------------|----------------|
| Directivity | 42 dB | 38 dB | 36 dB | 30 dB |
| Source match | 37 dB | 31 dB | 28 dB | 25 dB |
| Load match | 38 dB | 33 dB | 29 dB | 24 dB |
| Reflection tracking | ± 0.005 dB | ± 0.006 dB | ± 0.009 dB | ± 0.012 dB |
| Transmission tracking | ± 0.07 dB | ± 0.135 dB | ± 0.32 dB | ± 0.50 dB |

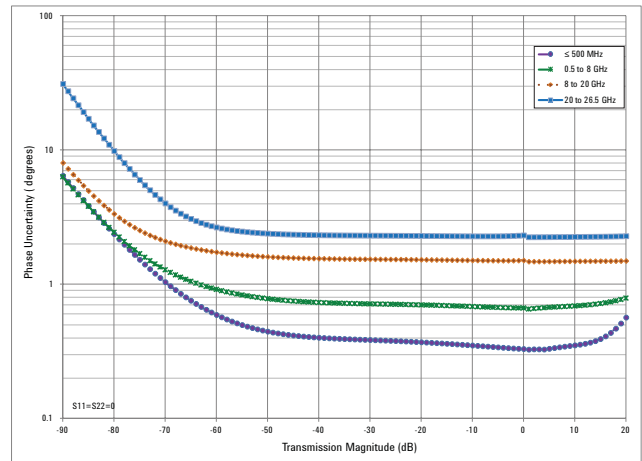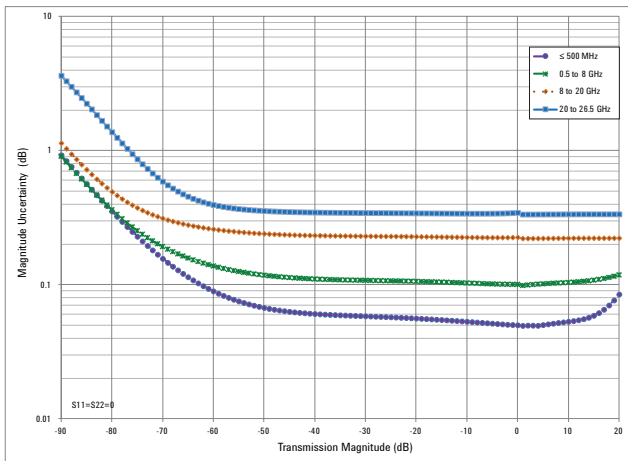

Transmission uncertainty

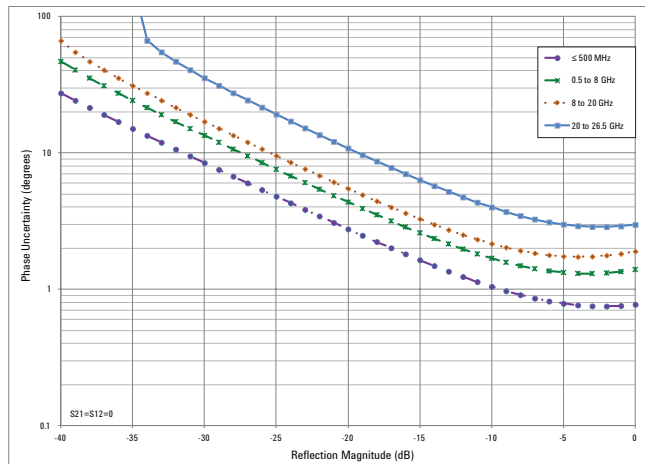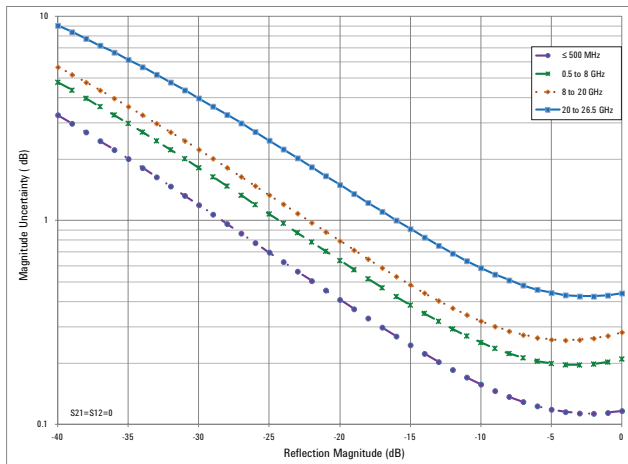

Reflection uncertainty

Time domain, Option 010

The performance listed in this section applies to the time domain capabilities available in the following models:

FieldFox microwave combination analyzers: **N9913A, N9914A, N9915A, N9916A, N9917A, N9918A**

FieldFox microwave vector network analyzers: **N9925A, N9926A, N9927A, N9928A**

In time-domain mode, FieldFox computes the inverse Fourier transform of the frequency-domain data to display reflection or transmission coefficients versus time.

Setup parameters

- Time: start, stop, center, span
- Gating: start, stop, center, span, and on/off
- Number of points, velocity factor, line loss, window shape, independent control for all four traces

Time stimulus modes

| | |
|------------------|--|
| Low-pass step | Low-pass step is similar to a traditional time domain reflectometer (TDR) stimulus waveform. It is used to measure low-pass devices. The frequency-domain data should extend from DC (extrapolated value) to a higher value. |
| Low-pass impulse | Low-pass impulse response is used to measure low-pass devices. |
| Bandpass impulse | The bandpass impulse simulates a pulsed RF signal and is used to measure the time domain response of band-limited devices. |

Windows

The windowing function can be used to filter the frequency domain data and thereby reduce overshoot and ringing in the time domain response.

| | |
|---------|---|
| Windows | Minimum, medium and maximum, manual entry of Kaiser Beta and impulse width. |
|---------|---|

Gating

The gating function can be used to selectively remove reflection or transmission time domain responses. In converting back to the frequency domain the effects of the responses outside the gate are removed. The results can be viewed with gating on and off, using two traces.

| | |
|-------------|--------------------------------|
| Gate types | Notch, bandpass |
| Gate shapes | Maximum, wide, normal, minimum |

Vector voltmeter (VVM), Option 308

The performance listed in this section applies to the VVM mode capabilities available in the following models:

FieldFox microwave combination analyzers: **N9913A, N9914A, N9915A, N9916A, N9917A, N9918A**

FieldFox microwave vector network analyzers: **N9925A, N9926A, N9927A, N9928A**

With vector voltmeter mode, you can characterize the difference between two measurements easily. The zeroing function allows you to create a reference signal, and characterize the difference between two device measurements. The results are shown on a large display in digital format.

| Models | Frequency range |
|----------------|--------------------|
| N9913A | 30 kHz to 4 GHz |
| N9914A | 30 kHz to 6.5 GHz |
| N9915A, N9925A | 30 kHz to 9 GHz |
| N9916A, N9926A | 30 kHz to 14 GHz |
| N9917A, N9927A | 30 kHz to 18 GHz |
| N9918A, N9928A | 30 kHz to 26.5 GHz |

Setup parameters

- 1-port cable trimming - reflection or S11 measurement, magnitude and phase
- 2-port transmission - transmission or S21 measurement, magnitude and phase
- A/B and B/A - ratio of two receivers or channels, magnitude and phase – Need an external signal generator for the A/B or B/A measurement (must order Option 211).
- Frequency (one CW frequency point)
- IF bandwidth - 10 Hz to 100 kHz
- Output power - Low or high

Spectrum analyzer

The specifications in this section apply to the spectrum analyzer capabilities available in the following models:

FieldFox microwave combination analyzers: **N9913A, N9914A, N9915A, N9916A, N9917A, N9918A**

FieldFox microwave spectrum analyzers: **N9935A, N9936A, N9937A, N9938A**

Definitions

Specification (spec)

Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions. Warranted performance. FieldFox must be within its calibration cycle. No warm-up required.

Typical

Expected performance of an average unit; does not include guardbands. It is not covered by the product warranty. FieldFox must be within its calibration cycle.

Nominal

A general, descriptive term or design parameter. It is not tested, and not covered by the product warranty. FieldFox must be within its calibration cycle.

| Models | Frequency range | |
|----------------|---------------------|-----------------|
| N9913A | 100 kHz to 4 GHz | Usable to 5 kHz |
| N9914A | 100 kHz to 6.5 GHz | Usable to 5 kHz |
| N9915A, N9935A | 100 kHz to 9 GHz | Usable to 5 kHz |
| N9916A, N9936A | 100 kHz to 14 GHz | Usable to 5 kHz |
| N9917A, N9937A | 100 kHz to 18 GHz | Usable to 5 kHz |
| N9918A, N9938A | 100 kHz to 26.5 GHz | Usable to 5 kHz |

The spectrum analyzer is tunable to 0 Hz or DC.
The preamplifier covers the full band. Nominal gain of 20 dB.

| Frequency reference | -10 to 55 °C | |
|------------------------------|---|--|
| Accuracy | ± 0.7 ppm (spec) + aging ± 0.4 ppm (typical) + aging | |
| Accuracy, when locked to GPS | ± 0.010 ppm (spec) | |
| Aging rate | ± 1 ppm/yr for 20 years (spec), will not exceed ± 3.5 ppm | |


| Frequency span | Spec | |
|---|--|---|
| Range | 0 Hz (zero span), 10 Hz to maximum frequency range of instrument | |
| Resolution | 1 Hz | |
| Accuracy | ±(2 x RBW centering + horizontal resolution) | ±(2 x RBW centering + 2 x horizontal resolution) for detector = Normal |
| Frequency readout accuracy Start, stop, center, marker | ± (readout frequency x frequency reference accuracy + RBW centering + 0.5 x horizontal resolution) | Horizontal resolution = frequency span / (trace points – 1) RBW centering: 5% x RBW, FFT mode (nominal) 16% x RBW, step mode (nominal) |

| Marker frequency counter | |
|--------------------------|--|
| Accuracy | ± (marker frequency x frequency reference accuracy + counter resolution) |
| Resolution | 1 Hz |

| Sweep Acquisition, span > 0 Hz | Spec |
|--|---|
| Range | 1 to 5000. Number of data acquisitions per measurement. Value is normalized to the minimum required to achieve amplitude accuracy with CW signals. Auto coupled. For pulsed RF signals, manually increase the sweep acquisition value to maximize the pulse spectrum envelope. |
| Resolution | 1 |
| Sweep time readout | Measured value representing time required to tune receiver, acquire data, and process trace. |
| Trace update | Nominal |
| Span = 20 MHz, RBW/VBW = 3 kHz | 1.7 updates per second |
| Span = 100 MHz, RBW/VBW auto coupled | 12 updates per second |
| Sweep time, zero-span | Nominal |
| Range | |
| Minimum | 1 μ s |
| Maximum | |
| RBW = 5 MHz | 10 ms |
| RBW = 3 MHz | 20 ms |
| RBW = 1 MHz | 50 ms |
| RBW = 300 kHz | 100 ms |
| RBW = 100 kHz | 300 ms |
| RBW = 30 kHz | 10 s |
| RBW = 10 kHz | 100 s |
| RBW \leq 3 kHz | 600 s |
| Resolution | 100 ns |
| Readout | Entered value representing trace horizontal scale range. |
| Trigger (in zero span) | Spec |
| Trigger type | Free run, video, external |
| Trigger slope | Positive edge, negative edge |
| Trigger delay | Range: 0 to 10 s Resolution: 100 ns |
| Auto trigger | Forces a periodic acquisition in the absence of a trigger event |
| Auto trigger range | 0 s (off) to 10 s |
| Trace points | 101, 201, 401, 601, 801, 1001 (defaults to 401) 10,001 number of points settable through SCPI |
| Resolution bandwidth (RBW) | Spec |
| Range (-3 dB bandwidth) | 10 Hz to 5 MHz Non-zero span: 1, 1.5, 2, 3, 5, 7.5, 10 sequence < 300 kHz, 300 kHz, 1 MHz, 3 MHz, 5 MHz Zero span: 1, 3, 10 sequence |
| Accuracy | Nominal |
| 10 Hz to 100 kHz | \pm 1% |
| 300 kHz to 3 MHz | \pm 5% |
| 5 MHz | \pm 10% |
| Selectivity (-60 dB/-3 dB) | 4:1 |
| Video bandwidth (VBW) | Spec |
| | 1 Hz to 5 MHz |

| Phase noise Offset | Stability, SSB phase noise at 1 GHz | | | |
|-----------------------|-------------------------------------|---------------------|---------------------|------------------------|
| | Spec (23 ± 5 °C) | Spec (-10 to 55 °C) | Typical (23 ± 5 °C) | Typical (-10 to 55 °C) |
| 10 kHz | -106 dBc/Hz | -106 dBc/Hz | -111 dBc/Hz | -111 dBc/Hz |
| 30 kHz | -106 dBc/Hz | -104 dBc/Hz | -108 dBc/Hz | -110 dBc/Hz |
| 100 kHz | -100 dBc/Hz | -99 dBc/Hz | -104 dBc/Hz | -105 dBc/Hz |
| 1 MHz | -110 dBc/Hz | -110 dBc/Hz | -113 dBc/Hz | -113 dBc/Hz |
| 3 MHz | -119 dBc/Hz | -118 dBc/Hz | -122 dBc/Hz | -122 dBc/Hz |
| 5 MHz | -120 dBc/Hz | -120 dBc/Hz | -123 dBc/Hz | -123 dBc/Hz |

Phase noise at different center frequencies (nominal)

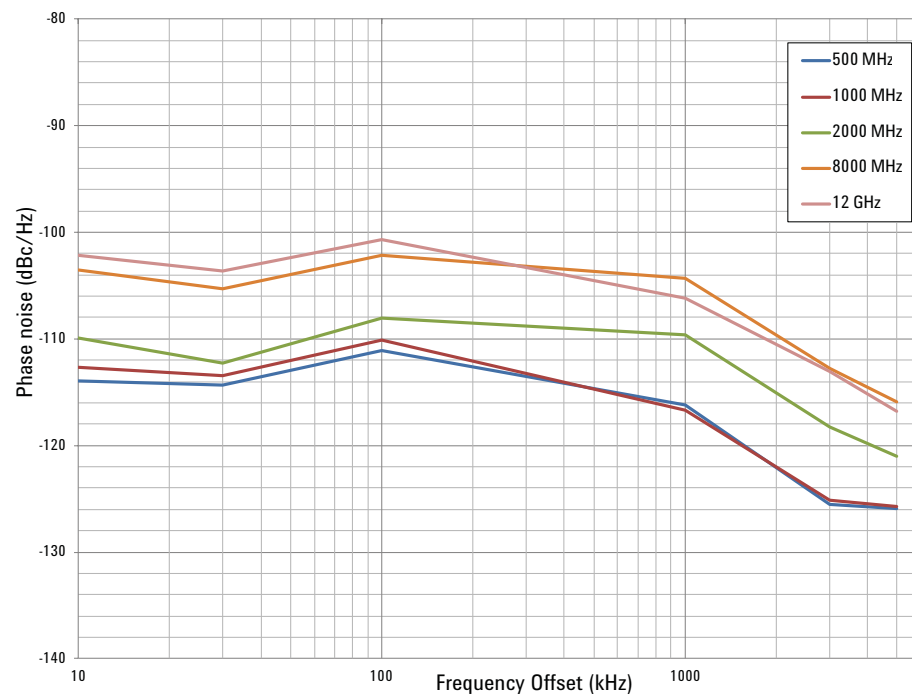

| Measurement range | Spec |
|--------------------------|---------------------------|
| 100 kHz to 26.5 GHz | DANL to +20 dBm |
| Input attenuator range | 0 to 30 dB, in 5 dB steps |
| Maximum input safe level | |
| Average CW power | +27 dBm, 0.5 watts |
| DC | ± 50 VDC |


| Displayed average noise level (DANL) | | RMS detection, log averaging, reference level of -20 dBm, normalized to 1 Hz RBW | | | |
|---|---|--|---------------------|---------------------|------------------------|
| Preamp off | | Spec (23 ± 5 °C) | Spec (-10 to 55 °C) | Typical (23 ± 5 °C) | Typical (-10 to 55 °C) |
| 2 MHz to 4.5 GHz ¹ | | -137 dBm | -135 dBm | -139 dBm | -138 dBm |
| > 4.5 to 7 GHz | | -133 dBm | -131 dBm | -136 dBm | -135 dBm |
| > 7 to 13 GHz | | -129 dBm | -127 dBm | -132 dBm | -130 dBm |
| > 13 to 17 GHz | | -124 dBm | -122 dBm | -126 dBm | -125 dBm |
| > 17 to 22 GHz | | -119 dBm | -117 dBm | -122 dBm | -121 dBm |
| > 22 to 25 GHz | | -114 dBm | -111 dBm | -117 dBm | -114 dBm |
| > 22 to 26.5 GHz | | -110 dBm | -108 dBm | -112 dBm | -111 dBm |
| Preamp on | | Spec (23 ± 5 °C) | Spec (-10 to 55 °C) | Typical (23 ± 5 °C) | Typical (-10 to 55 °C) |
| 2 MHz to 4.5 GHz ¹ | | -153 dBm | -151 dBm | -155 dBm | -154 dBm |
| > 4.5 to 7 GHz | | -149 dBm | -147 dBm | -151 dBm | -150 dBm |
| > 7 to 13 GHz | | -147 dBm | -145 dBm | -149 dBm | -148 dBm |
| > 13 to 17 GHz | | -143 dBm | -141 dBm | -145 dBm | -144 dBm |
| > 17 to 22 GHz | | -140 dBm | -139 dBm | -143 dBm | -142 dBm |
| > 22 to 25 GHz | | -134 dBm | -132 dBm | -137 dBm | -134 dBm |
| > 25 to 26.5 GHz | | -128 dBm | -126 dBm | -131 dBm | -129 dBm |
| Spec | | | | | |
| Display range | Log scale 10 divisions 1 to 100 dB/division in 0.01 dB steps | | | | |
| Amplitude scale units | dBm, dBmV, dBμV, W, V, A, dBmA, dBμA | | | | |
| Trace detectors | Normal, positive peak, negative peak, sample, average (RMS) | | | | |
| Trace states | Clear/write, max hold, min hold, average, view, blank | | | | |
| Number of traces | 4 | | | | |
| Number of averages | 1 to 10,000 | | | | |
| Reference level | -150 to + 30 dBm | | | | |
| 50 MHz absolute amplitude accuracy | 50 MHz, verified with input level of 0 to -35 dBm, peak detector, 10 dB attenuation, preamplifier off, 30 kHz RBW, all settings auto-coupled, no warm-up required, -10 to 55 °C ± 0.3 dB, spec ± 0.10 dB, typical | | | | |
| Total absolute amplitude accuracy | Verified with input level of -10 to -5 dBm. Peak detector, 10 dB attenuation, preamplifier off, 30 kHz RBW, all settings auto-coupled, no warm-up required. Includes frequency response uncertainties. | | | | |
| | | Spec (23 ± 5 °C) | Spec (-10 to 55 °C) | Typical (23 ± 5 °C) | Typical (-10 to 55 °C) |
| 100 kHz to 18 GHz | | ± 0.8 dB | ± 1.0 dB | ± 0.35 dB | ± 0.50 dB |
| > 18 GHz to 26.5 GHz | | ± 1.0 dB | ± 1.2 dB | ± 0.50 dB | ± 0.60 dB |

¹ Increase the noise floor 4 dB for frequencies between 2.1 and 2.8 GHz.


| | | |
|--|---|---|
| Resolution bandwidth switching uncertainty | Nominal | |
| RBW < 5 MHz | 0.0 dB | |
| For signals not at center frequency | 0.7 dB peak-to-peak | |
| RF input VSWR, 10 dB attenuation | Nominal | |
| 10 MHz to 2.7 GHz | 1.7 : 1 | |
| > 2.7 to 7.5 GHz | 1.5 : 1 | |
| > 7.5 GHz | 2.2 : 1 | |
| Second harmonic distortion | Nominal | |
| -30 dBm signal at mixer input | | |
| ≤ 4 GHz | <-60 dBc or +30 dBm | |
| > 4 GHz | <-80 dBc or +50 dBm | |
| Third order intermodulation distortion (TOI) | Spec | Typical |
| | at 2.4 GHz, +15 dBm | < 1 GHz, +10 dBm 1 to 7.5 GHz, +15 dBm > 7.5 GHz, +21 dBm |
| Spur free dynamic range | at 2.4 GHz > 105 dB nominal 2/3 (TOI-DANL) in 1 Hz RBW | |
| Residual responses | Nominal | |
| Preamp off, 0 dB attenuation | | |
| 100 kHz to 13 GHz ¹ | -110 dBm | |
| >13 to 20 GHz | -90 dBm | |
| >20 to 26.5 GHz | -80 dBm | |
| Input related spurs | | |
| -30 dBm signal at mixer input (excludes frequencies listed below) | | |
| f = center frequency | | |
| < 2.6 GHz, f + 2 x 33.75 MHz | -80 dBc | |
| < 2.6 GHz, f - 2 x 866.25 MHz | -80 dBc | |
| < 2.6 GHz, f + 2 x 3.63375 GHz | -85 dBc | |
| ≥ 2.6 to 7.5 GHz, f + 2 x 33.75 MHz | -80 dBc | |
| ≥ 2.6 to 7.5 GHz, f + 2 x 866.25 MHz | -80 dBc | |
| ≥ 2.6 to 7.5 GHz, f + 2 x 9.86625 GHz | -80 dBc | |
| ≥ 7.5 to 16.3 GHz, f + 2 x 3.63375 GHz | -65 dBc | |
| ≥ 16.3 to 26.5 GHz, f - 2 x 3.63375 GHz | -60 dBc | |
| ≥ 7.5 to 26.5 GHz, f + 2 x 33.75 MHz | -80 dBc | |
| ≥ 7.5 to 26.5 GHz, f - 2 x 866.25 MHz | -80 dBc | |
| LO related spurs | -60 dBc | |
| Sideband | -80 dBc | |

¹ Excludes 4.5 MHz, -95 dBm at 4.5 MHz.

Nominal distortion and noise limited (10 Hz RBW) dynamic range

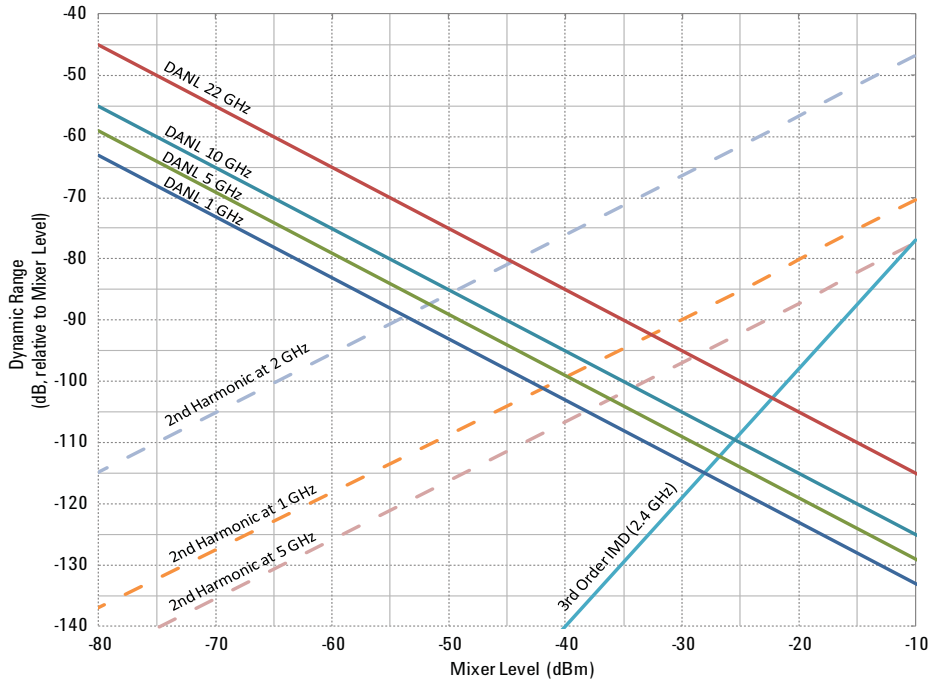

Dynamic range versus offset frequency versus RBW (nominal)

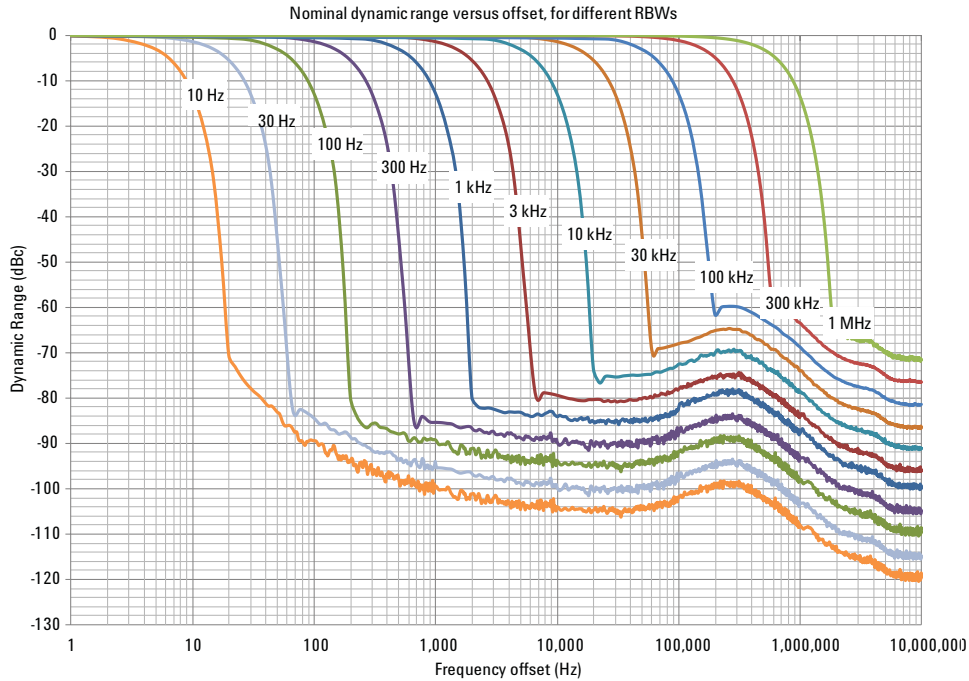

Tracking generator or independent source

The specifications in this section apply to the tracking generator or independent source capabilities available in the following models:

FieldFox microwave combination analyzers: **N9913A, N9914A, N9915A, N9916A, N9917A, N9918A**. Included with Option 233. To obtain stimulus/response measurements in tracking generator mode, Option 210 must be ordered also.

FieldFox microwave spectrum analyzers: **N9935A, N9936A, N9937A, N9938A**. Included with Option 220.

Note: Traditional tracking generators track the receiver frequency. In FieldFox analyzers, the tracking generator frequency can be set to either track the receiver frequency, or act as an independent CW source.

| Models | Tracking generator or independent source frequency range |
|----------------|--|
| N9913A | 30 kHz to 4 GHz |
| N9914A | 30 kHz to 6.5 GHz |
| N9915A, N9935A | 30 kHz to 9 GHz |
| N9916A, N9936A | 30 kHz to 14 GHz |
| N9917A, N9937A | 30 kHz to 18 GHz |
| N9918A, N9938A | 30 kHz to 26.5 GHz |

| Output power, maximum | 23 ± 5 °C | |
|-----------------------|-----------|----------|
| Frequency | Typical | Nominal |
| 30 kHz to 300 kHz | -11 dBm | |
| 300 kHz to 2 MHz | -3 dBm | -2 dBm |
| > 2 MHz to 625 MHz | -2 dBm | -1 dBm |
| > 625 MHz to 3 GHz | +1 dBm | +3 dBm |
| ≥ 3 to 6.5 GHz | -1 dBm | +1 dBm |
| ≥ 6.5 to 9 GHz | -2 dBm | 0 dBm |
| ≥ 9 to 14 GHz | -4 dBm | -2.5 dBm |
| ≥ 14 to 18 GHz | -6 dBm | -4.5 dBm |
| ≥ 18 to 23 GHz | -10 dBm | -8.5 dBm |
| ≥ 23 to 26.5 GHz | -12 dBm | -11 dBm |

| | |
|-----------------------------|--|
| Power level accuracy | ± 1.5 dB at -15 dBm, typical Power flattened across frequency range |
| Power step size | Power settable in 1 dB steps across power range |
| Functions | Continuous wave (CW), CW coupled, tracking |

| RF output VSWR, 10 dB attenuation | Nominal |
|-----------------------------------|---------|
| 10 MHz to 2.7 GHz | 1.7 : 1 |
| > 2.7 to 7.5 GHz | 1.5 : 1 |
| > 7.5 GHz | 2.2 : 1 |

| Dynamic range | Typical, -10 to 55 °C | |
|------------------|-----------------------|-----------|
| Frequency | Preamp off | Preamp on |
| 2 MHz to 2 GHz | 97 dB | 112 dB |
| > 2 to 7 GHz | 93 dB | 108 dB |
| > 7 to 11 GHz | 88 dB | 103 dB |
| > 11 to 18 GHz | 79 dB | 94 dB |
| > 18 to 21 GHz | 71 dB | 86 dB |
| > 21 to 23 GHz | 55 dB | 70 dB |
| > 23 to 25 GHz | 50 dB | 65 dB |
| > 25 to 26.5 GHz | 45 dB | 60 dB |

Spectrum analyzer IF output

| | |
|-------------------------|---|
| Center frequency | 33.75 MHz |
| IF bandwidth | 5 MHz (default), 25 MHz |
| Connector | SMB male |
| Conversion loss | 0 to 27 dB nominal The loss increases approximately linearly as frequency increases, with ~27 dB loss at 26.5 GHz. Conversion loss is defined from RF input to SA output with -10 dBm input power, 0 dB attenuation, and preamp off. |

AM/FM tune and listen

| | |
|---------------------------------|------------------------|
| Audio demodulation types | AM, FM narrow, FM wide |
| Audio bandwidth | 16 kHz |
| Receiver IF bandwidth | |
| AM | 35 kHz |
| FM narrow | 12 kHz |
| FM wide | 150 kHz |
| Listen time range | 0 to 100 seconds |

Preamplifier, Option 235

| | |
|---------------------|-------------------------------|
| Preamplifier | Full band; nominal gain 20 dB |
|---------------------|-------------------------------|

Interference analyzer and spectrogram, Option 236

The capabilities listed in this section apply to the interference analyzer capabilities available with Option 236 in the following models:

FieldFox microwave combination analyzers: **N9913A, N9914A, N9915A, N9916A, N9917A, N9918A**

FieldFox microwave spectrum analyzers: **N9935A, N9936A, N9937A, N9938A**

| | |
|------------------------------|---|
| Interference analyzer | |
| Spectrogram | Overlay, full screen, top, or bottom with active trace |
| Waterfall | |
| Markers | Time, delta time |
| Trace playback and recording | Record all spectrum analyzer measurements Store data internally or on USB or SD card Playback recorded data using FieldFox Frequency mask trigger allows recording to occur upon trigger |

Reflection measurements (RL, VSWR), Option 320

The capabilities listed in this section apply to the reflection measurements option available with Option 320¹ in the following models:

FieldFox microwave spectrum analyzers: **N9935A, N9936A, N9937A, N9938A**²

| Models | Reflection measurements |
|--------|-------------------------|
| N9935A | 30 kHz to 9 GHz |
| N9936A | 30 kHz to 14 GHz |
| N9937A | 30 kHz to 18 GHz |
| N9938A | 30 kHz to 26.5 GHz |

Measurements: Return loss, VSWR

Normalization using data/memory

Radio standards

With a radio standard applied, pre-defined frequency bands, channel numbers or uplink / downlink selections can be used instead of manual frequency entry. The pre-defined FieldFox radio standards include bands such as W-CDMA, LTE, and GSM. Alternately, users can create custom standards and import them into FieldFox analyzers.

¹ Option 320 requires Option 220.

² N9938A requires Option 100, 3.5 mm connector.

The specifications in the sections that follow apply to these FieldFox analyzers:

FieldFox microwave combination analyzers: **N9913A, N9914A, N9915A, N9916A, N9917A, N9918A**

FieldFox microwave vector network analyzers: **N9925A, N9926A, N9927A, N9928A**

FieldFox microwave spectrum analyzers: **N9935A, N9936A, N9937A, N9938A**

Built-in power meter, Option 310

Using the built-in power meter option, FieldFox is able to make very accurate channel power measurements. The channel bandwidth can be set wide to simulate average power meter measurement. This measurement function provides the flexibility to make user definable channel power measurements.

Setup parameters: Center frequency, including selection of radio standards and channel selection, span or channel width

Functions: Relative/absolute measurements, offsets, units of dBm or watts, or dB or %, minimum and maximum limits

| Models | Frequency range | |
|------------------------|---------------------|-----------------|
| N9913A | 100 kHz to 4 GHz | Usable to 5 kHz |
| N9914A | 100 kHz to 6.5 GHz | Usable to 5 kHz |
| N9915A, N9925A, N9935A | 100 kHz to 9 GHz | Usable to 5 kHz |
| N9916A, N9926A, N9936A | 100 kHz to 14 GHz | Usable to 5 kHz |
| N9917A, N9927A, N9937A | 100 kHz to 18 GHz | Usable to 5 kHz |
| N9918A, N9928A, N9938A | 100 kHz to 26.5 GHz | Usable to 5 kHz |

Amplitude accuracy

| | Spec (23 ± 5 °C) | Typical (23 ± 5 °C) | Spec (-10 to 55 °C) | Typical (-10 to 55 °C) |
|----------------------|------------------|---------------------|---------------------|------------------------|
| 100 kHz to 18 GHz | ± 0.8 dB | ± 0.35 dB | ± 1.0 dB | ± 0.50 dB |
| > 18 GHz to 26.5 GHz | ± 1.0 dB | ± 0.50 dB | ± 1.2 dB | ± 0.60 dB |

External USB power sensor support, Option 302

The external USB power sensor option supports the Agilent Technologies U2000 Series USB average power sensors, and allows the user to make absolute power measurements. For specifications, visit: <http://www.agilent.com/find/usbsensor>

Setup parameters: Frequency

Functions: Relative/absolute measurements, offsets, units of dBm or watts, or dB or %, minimum and maximum limits

Built-in GPS receiver, Option 307

| | |
|-----------------------|--|
| GPS receiver | The internal GPS receiver can be used as a frequency reference. ¹ |
| Modes | Off, internal, external |
| Sync clock | On, off |
| Functionality | Geo-location: latitude, longitude, altitude, time, sync time/date |
| Connector for antenna | SMA (f), 3.3 V |

¹ External GPS USB receivers can be used to provide geo-location data. However, they cannot be used for frequency reference locking.

DC Bias variable-voltage source, Option 309

| | Nominal |
|-------------------------------|------------------|
| Connector | SMB (m) |
| Voltage | +1 to +32 V |
| Resolution | 0.1 V |
| Maximum current ¹ | 0.65 A |
| DC current readout resolution | 0.01 A |
| Maximum power ¹ | 7 watts |
| Display read out | Voltage, current |

General information

| | |
|--|---|
| Calibration cycle | 1 year |
| Weight | 3.0 kg or 6.6 lbs. including battery |
| Dimensions: H x W x D | 292 x 188 x 72 mm 11.5" x 7.4" x 2.8" |
| Environmental | |
| MIL-PRF-28800F Class 2 | Operating temperature Storage temperature Operating humidity Random vibration Functional shock Bench drop |
| Maximum humidity | 95% |
| Altitude – operating | 9144 m or 30,000 ft (using battery) |
| Altitude – Non-operating | 15,240 m or 50,000 ft |
| Altitude – AC to DC adapter | 3000 m or 9840 ft |
| Intrusion protect | IP 30 IEC/EN 60529 |
| Temperature range | |
| Operating, AC power, spec | -10 to 55 °C 14 to 131 °F |
| Operating, battery, spec | -10 to 50 °C 14 to 122 °F |
| Operating, battery, typical | -10 to 55 °C 14 to 131 °F |
| Storage, spec ² | -51 to 71 °C -60 to 160 °F |
| Complies with European EMC directive 2004/108/EC | IEC/EN 61326–1 CISPR Pub 11 Group 1, class B, Group 1 limit of CISPR 11:203/EN 55011:2007 AS/NZS CISPR 11 ICES/NMB–001 |
| Complies with European low voltage directive 2006/95/EC | IEC/EN 61010–1 2nd Edition Canada: CSA C22.2 No. 61010–1–04 USA: UL 61010–1 2nd Edition |
| Explosive environment | This product has been type tested to meet the requirements for operation in explosive environments in accordance with MIL-STD-810G, Method 511.5, Procedure I.” |

¹ Battery life will be reduced when DC source is used. A trip function turns off the power supply when the rated current or power is exceeded.

² The battery packs should be stored in an environment with low humidity. Extended exposure to temperature above 45 °C could degrade battery performance and life.

General information *continued*

| | |
|---|---|
| Power supply | |
| External DC input | 15 to 19 VDC, 40 watts maximum when battery charging |
| External AC power adapter | Efficiency level IV, 115 VAC |
| Input | 100 to 250 VAC, 50 to 60 Hz, 1.25-0.56 A |
| Output | 15 VDC, 4 A |
| Power consumption | 14 watts typical |
| Battery | |
| Lithium ion | 10.8 V, 4.6 A-h |
| Operating time | 3.5 hours (typical) |
| Charge time: A fully discharged battery takes about 1.5 hours to recharge to 80%. Four hours to 100%. | |
| Discharge temperature limits | -10 to 60 °C, ≤ 85% RH |
| Charge temperature limits | 0 to 45 °C, ≤ 85% RH |
| Storage temperature limits | -20 to 50 °C, ≤ 85 % RH The battery packs should be stored in an environment with low humidity. Extended exposure to temperature above 45 °C could degrade battery performance and life. |
| Test port connectors | |
| Models ≤ 18 GHz | Type-N (f) |
| Models > 18 GHz | 3.5 mm (m), unless Type-N (f) option ordered |
| Display | 6.5" transfective color VGA-LED backlit |
| Headphone jack connector | 3.5 mm (1/8 inch) miniature audio jack |
| USB-A, 2-ports | Hi-speed USB 2.0 |
| Mini USB, 1-port | Hi-speed USB 2.0; provided for future use |
| LAN | 100 base-T, RJ-45 connector Used for programming, data saving, and connection to Data Link software |
| Programming | SCPI, using the built-in LAN interface |
| Languages | English, Spanish, German, Italian, French, Russian, Japanese, Chinese, and Turkish |

Limit lines

The limit line capabilities listed in this section apply to the cable and antenna analyzer, network analyzer and spectrum analyzer modes in all FieldFox analyzers.

Limit lines can be a combination of horizontal lines, sloping lines, or discrete data points

Limit types: Fixed or relative

Each trace can have its own limit line

Limit lines can be built from a current trace

Limit segments > 100, limited by memory size

Max limit line number of points: 10,001

Beep: on/off

Pass/fail warning: on/off

Offset and margin: An increase or decrease in the limit line

Save/recall limit lines

Data storage

| | |
|------------|---|
| Internal | Minimum: 4 GB Minimum states and traces: 1000 |
| External | Supports USB 2.0 compatible memory devices and SD/SDHC memory cards |
| Data types | Trace, trace+state, picture (png), data (csv), S2P |

Secure operation

| | |
|--------------------|---|
| Frequency blanking | For protection of sensitive data all frequency information can be turned off. |
| Erase user data | All user data can be erased on a FieldFox analyzer. For more information visit: http://www.agilent.com/securefieldfox |

Reference out/trigger out

| | |
|------------------|---|
| Connector | SMB (m), 50 ohm |
| Output amplitude | ≥ 0 dBm |
| Frequency | 10 MHz (1 + frequency reference accuracy) |
| Trigger out | Reserved for future use |

Reference in/trigger in

| | |
|-----------------|-----------------------------|
| Connector | SMA(f), 50 ohm |
| Reference input | 10 MHz, -5 to +10 dBm |
| Trigger input | 3.3 or 5 V TTL logic levels |

Carry precision with you.

Every piece of gear in your field kit had to prove its worth. Measuring up and earning a spot is the driving idea behind Agilent's FieldFox analyzers. They're equipped to handle routine maintenance, in-depth troubleshooting and anything in between. Better yet, FieldFox delivers Agilent-quality measurements - wherever you need to go. Add FieldFox to your kit and carry precision with you.

| Literature | Number |
|---|-------------|
| FieldFox Handheld Analyzers, Brochure | 5990-9779EN |
| FieldFox Combination Analyzers, Technical Overview | 5990-9780EN |
| FieldFox Microwave Spectrum Analyzers, Technical Overview | 5990-9782EN |
| FieldFox Microwave Vector Network Analyzers, Technical Overview | 5990-9781EN |
| FieldFox Handheld Analyzers, Data Sheet | 5990-9783EN |
| FieldFox Handheld Analyzers, Configuration Guide | 5990-9836EN |
| FieldFox RF Analyzer, Technical Overview | 5989-8618EN |
| FieldFox RF Analyzer, Data Sheet | N9912-90006 |
| FieldFox RF Vector Network Analyzer, Technical Overview | 5990-5087EN |
| FieldFox RF Vector Network Analyzer, Data Sheet | 5990-5363EN |

Download application notes, watch videos, and learn more:

www.agilent.com/find/fieldfox



myAgilent

www.agilent.com/find/myagilent

A personalized view into the information most relevant to you.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality

www.agilent.com
www.agilent.com/find/fieldfox

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

| | |
|---------------|----------------|
| Canada | (877) 894 4414 |
| Brazil | (11) 4197 3600 |
| Mexico | 01800 5064 800 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 112 929 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 375 8100 |

Europe & Middle East

| | |
|----------------|----------------------|
| Belgium | 32 (0) 2 404 93 40 |
| Denmark | 45 45 80 12 15 |
| Finland | 358 (0) 10 855 2100 |
| France | 0825 010 700* |
| | *0.125 €/minute |
| Germany | 49 (0) 7031 464 6333 |
| Ireland | 1890 924 204 |
| Israel | 972-3-9288-504/544 |
| Italy | 39 02 92 60 8484 |
| Netherlands | 31 (0) 20 547 2111 |
| Spain | 34 (91) 631 3300 |
| Sweden | 0200-88 22 55 |
| United Kingdom | 44 (0) 118 927 6201 |

For other unlisted countries:

www.agilent.com/find/contactus

Revised: October 11, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012, 2013
Published in USA, February 6, 2013
5990-9783EN



Agilent Technologies