


# InfiniiVision 2000 X-Series Oscilloscopes

Data Sheet



Test & Measurement World

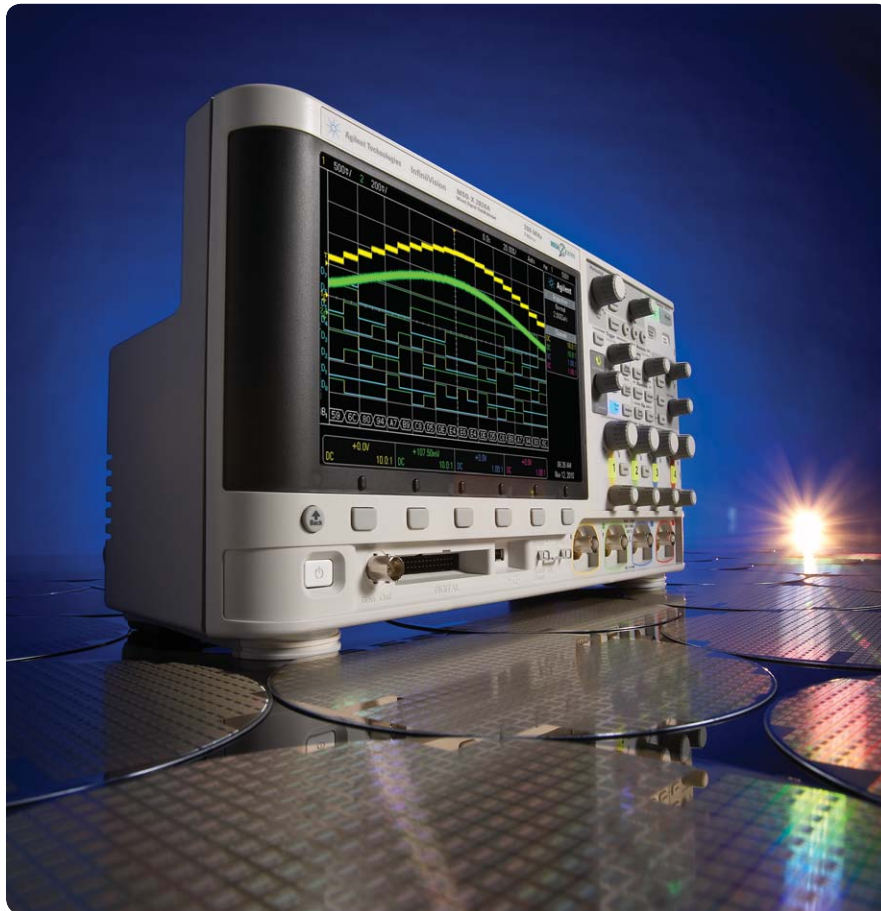

2011 FINALIST

global sources

电子成就奖  
China ACE Awards



Oscilloscopes redefined:  
Breakthrough technology delivers  
more scope for the same budget

*Anticipate — Accelerate — Achieve*



**Agilent Technologies**

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Breakthrough technology for budget conscious customers


### Overview of the Agilent InfiniiVision X-Series oscilloscopes

|  | InfiniiVision<br>2000 X-Series                          | InfiniiVision<br>3000 X-Series  | InfiniiVision<br>4000 X-Series   |
|--|---|---|--|
| Analog channels  | 2 and 4   | 2 and 4   | 2 and 4  |
| Bandwidth (upgradable)                                   | 70, 100, 200 MHz  | 100, 200, 350, 500 MHz, 1 GHz   | 200, 350, 500 MHz, 1 GHz, 1.5 GHz  |
| Digital channels   | 8 (MSO models or upgrade)                               | 16 (MSO models or upgrade)  | 16 (MSO models or upgrade)   |
| Maximum sample rate                                      | 2 GSa/s   | 5 GSa/s (1-GHz models)<br>4 GSa/s (100-500 MHz models)  | 5 GSa/s  |
| Maximum memory depth                                     | 100 kpts/channel (standard)<br>1 Mpt/channel (optional) | 2 Mpts (standard), 4 Mpts (option)  | 4 Mpts (standard)  |
| Waveform update rate                                     | > 50,000 waveforms per second                           | > 1,000,000 waveforms per second  | > 1,000,000 waveforms per second   |
| Display  | 8.5-inch display  | 8.5-inch display  | 12.1-inch capacitive touch display   |
| InfiniiScan Zone touch trigger                           | No  | No  | Standard   |
| WaveGen 20-MHz function/<br>arbitrary waveform generator | Single-channel function (option)                        | Single-channel AWG (option)   | Dual-channel AWG (option)  |
| Integrated digital voltmeter                             | Yes (option)  | Yes (option)  | Yes (option)   |
| Search and navigate                                      | No  | Yes   | Yes  |
| Serial protocol analysis                                 | Yes (CAN, LIN, I <sup>2</sup> C, SPI, RS232/UART)       | Yes (optional: ARINC 429, CAN, FlexRay, I <sup>2</sup> C, I <sup>2</sup> S, LIN, MIL-STD-1553, SPI, UART/RS232) | Yes (optional: ARINC 429, CAN, FlexRay, I <sup>2</sup> C, I <sup>2</sup> S, LIN, MIL-STD-1553, SPI, UART/RS232, USB 2.0) |
| Segmented memory   | Yes (option)  | Yes (option)  | Standard   |
| Mask/limit testing                                       | Yes (option)  | Yes (option)  | Yes (option)   |
| Power analysis   | No  | Yes (option)  | Yes (option)   |
| USB 2.0 signal quality test                              | No  | No  | Yes (option)   |
| HDTV analysis  | No  | Yes (option)  | Yes (option)   |
| Advanced waveform math                                   | No  | Yes (option)  | Standard   |
| Connectivity   | Standard USB 2.0 (LAN/<br>Video option) (GPIB option)   | Standard USB2.0 (LAN/Video option) (GPIB option)  | Standard USB2.0, LAN, video out (GPIB option)  |

### Need bigger display and state-of-the-art usability?

See the InfiniiVision 4000 X-Series, which redefines the oscilloscope experience.

- Industry's first 12.1-inch capacitive touch display
- InfiniiScan Zone touch trigger capability
- 200 MHz - 1.5 GHz DSO and MSO models
- 1,000,000 wfms/sec
- Standard segmented memory
- Fully upgradable 5 instrument in 1
  - Digital channels (MSO)
  - Protocol analysis including USB 2.0
  - 20 MHz Dual-channel WaveGen with arbitrary waveform and modulation support
  - Digital voltmeter (DVM)
- Application analysis including power analysis, Xilinx FPGA, and USB 2.0 signal quality
- N8900A InfiniiView offline analysis software support
- Standard LAN, USB, and video out connectivity

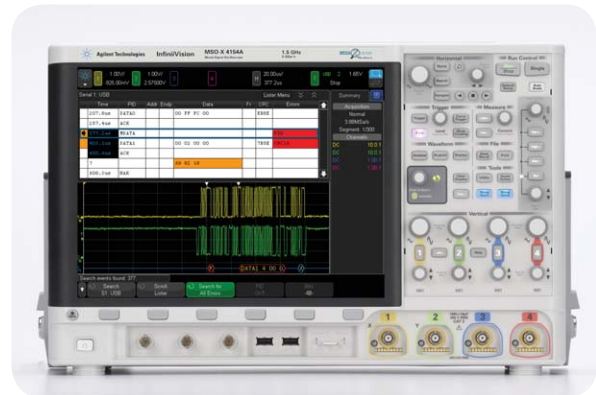

See [www.agilent.com/find/4000X-Series](http://www.agilent.com/find/4000X-Series) for more details.

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget


## More scope

The InfiniiVision 2000 X-Series offers entry-level price points to fit your budget with superior performance and optional capabilities that are not available in any other oscilloscope in its class. Agilent's breakthrough technology delivers more scope for the same budget.

With more scope, you can:

- **See more** of your signal more of the time with the largest screen in its class, the deepest memory and the fastest waveform update rates
- **Do more** with the power of 5 instruments in 1: oscilloscope, logic timing analyzer, WaveGen built-in 20 MHz function generator (optional), serial protocol triggering and decode (optional), and digital voltmeter (optional)
- **Get more** investment protection with the classes only fully upgradable scope, including memory and bandwidth, and a standard 5 year warranty.\*

\*5-year warranty applies to all orders on or after 1/1/2013.

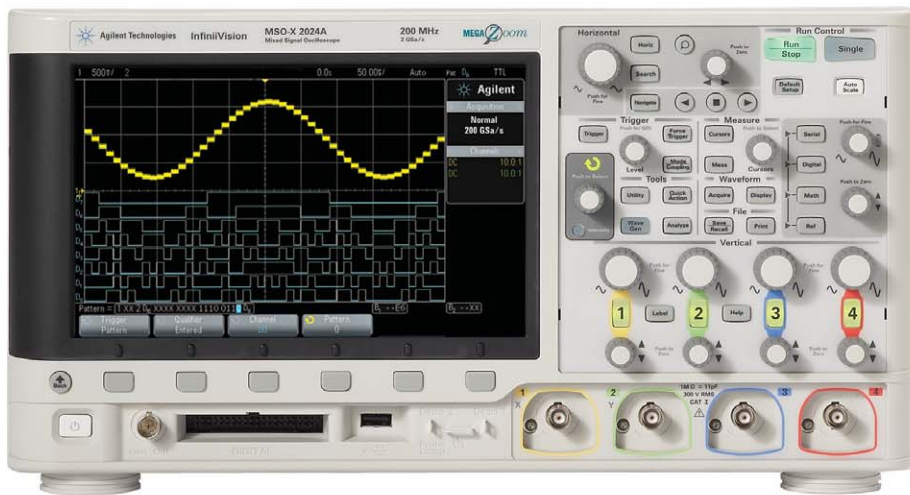

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## See more of your signal, more of the time

### Largest display


Engineering for the best signal visibility starts with the largest display. Our 8.5-inch WVGA display offers 50% more viewing area with 3.5 times the resolution (WVGA 800 x 480 versus 7-inch WQVGA 480 x 234).



Notice that the Agilent 2000 X-Series allows you to see more of your signals, and captures the infrequent glitch that you are unable to see on other oscilloscopes in this class.


### Fastest update rate

With Agilent-designed *MegaZoom IV* custom ASIC technology, the InfiniiVision 2000 X-Series family delivers up to 50,000 waveforms per second. With this speed you can see signal detail and infrequent anomalies more of the time.

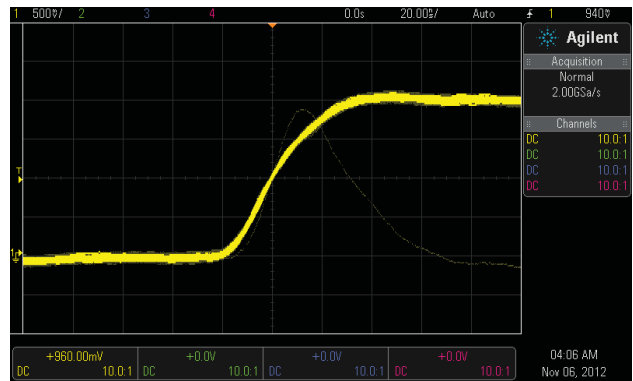

### How does Agilent do that?

Agilent-designed *MegaZoom IV* custom ASIC technology combines the capabilities of an oscilloscope, logic analyzer, and WaveGen built-in function generator in a compact form factor at an affordable price. 4<sup>th</sup> generation *MegaZoom* technology enables the industry's fastest waveform update rate with responsive deep memory acquisitions.

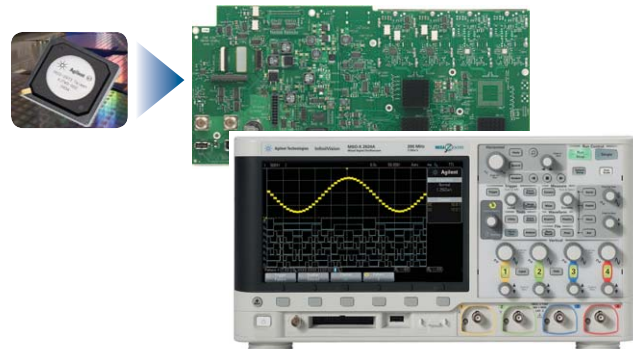

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Do more with the power of 5 instruments in 1

### Best-in-class oscilloscope

The InfiniiVision 2000 X-Series features Agilent's patented *MegaZoom IV* smart memory technology that is always enabled and always responsive providing the industry's fastest update rate at up to 50,000 waveforms per second, with no compromise if you turn on measurements or add digital channels. In addition, the 2000 X-Series offers 23 automated measurements such as voltage, time, and frequency as well as five waveform math functions including add, subtract, multiply, divide, and FFT.

### Industry's first economy-class mixed signal oscilloscope (MSO)

The 2000 X-Series is the first instrument in its class to offer an integrated logic timing analyzer. Digital content is everywhere in today's designs and with an additional 8 integrated digital timing channels, you now have up to 12 channels of time-correlated triggering, acquisition and viewing on the same instrument. Buy a 2 or 4 channel DSO and at any time, upgrade it yourself to a MSO with a license to turn on those integrated 8 digital timing channels.


### Industry's first WaveGen built-in 20 MHz function generator with a modulation capability

An industry first, the 2000 X-Series offers an integrated 20 MHz function generator, now available with the signal modulation capability. Ideal for educational or design labs where bench space and budget are at a premium, the integrated function generator provides stimulus output of sine, square, ramp, pulse, DC and noise waveforms to your device under test. No need to buy a separate function generator when you can get one integrated in your new oscilloscope. Turn on WaveGen at any time by ordering the DSOX2WaveGen option and install the license yourself.

### Hardware-based serial protocol decode and triggering

- Embedded serial triggering and analysis (I<sup>2</sup>C, SPI)
- Computer serial triggering and analysis (RS232/422/485/UART)
- Automotive and industrial serial triggering and analysis (CAN,LIN)

Agilent's InfiniiVision Series oscilloscopes are the industry's first scopes to use hardware-based serial protocol decoding. Other vendors scopes use software post-processing techniques to decode serial packets/frames. With these software techniques, waveform and decode-update rates tend to be slow (sometimes seconds per update). That's especially true when using deep memory, which is often required to capture multiple packetized serial bus signals. Faster decoding with hardware-based technology enhances scope usability, and more importantly, the probability of capturing infrequent serial communication errors.

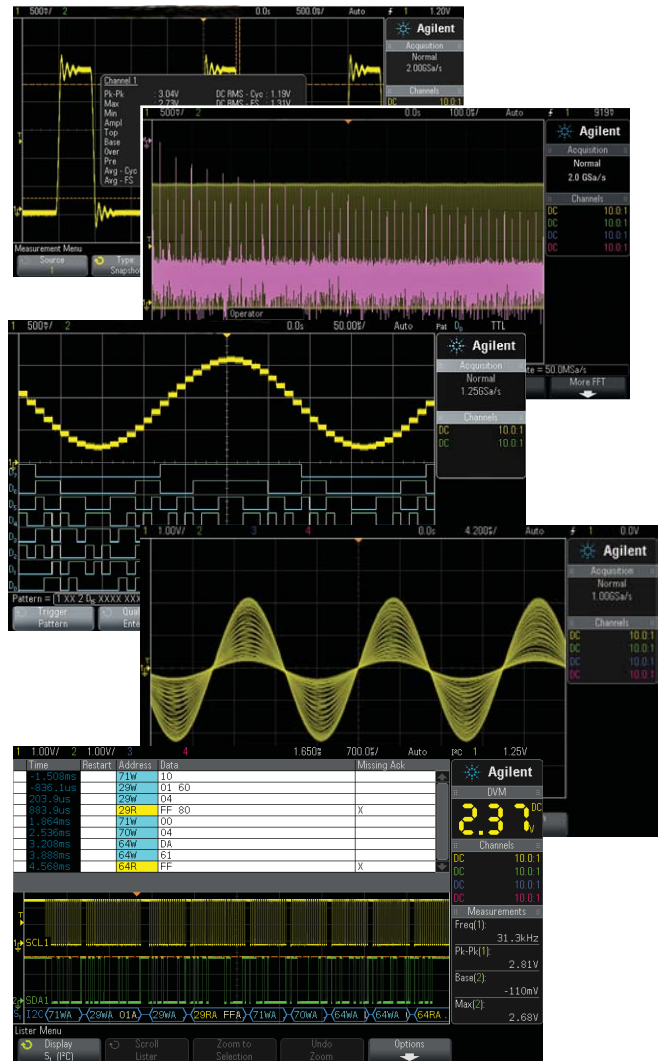

After capturing a long record of serial bus communication using the InfiniiVision scope's MegaZoom IV deep memory, you can easily perform a search operation based on specific criteria, and then quickly navigate to bytes/frames of serial data that satisfy that search criteria. Sometimes it may be necessary to correlate data from one serial bus to another.

### Integrated digital voltmeter

An industry first, the 2000 X-Series offers an integrated 3-digit voltmeter (DVM) and 5-digit frequency counter inside the oscilloscopes. The voltmeter operates through the same probes as the oscilloscope channels, however, the measurements are de-coupled from the oscilloscope triggering system so that both the DVM and triggered oscilloscope measurements can be made with the same connection. The voltmeter results are always displayed, keeping these quick characterization measurements at your fingertips. Turn on DVM at any time by ordering the DSOXDVM option.

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Get more investment protection with the industry's only fully upgradable oscilloscope

### Upgradability:

Project needs change, but traditional oscilloscopes are fixed – you get what you pay for at the time of purchase. With the 2000 X-Series, your investment is protected. If you need more bandwidth (up to 200 MHz), digital channels, WaveGen, integrated digital voltmeter, or measurement applications in the future, you can easily add them all after the fact.


See page 21 for more information on upgradable products.

Add at the time of your purchase or upgrade later:

- Bandwidth
- Digital channels (MSO)
- WaveGen built-in 20 MHz function generator
- Integrated digital voltmeter (DVM)
- Serial protocol analysis
- Measurement applications
  - Mask testing
  - Segmented memory
  - Educators' lab kit


### Mask testing

Whether performing pass/fail tests to specified standards in manufacturing or testing for infrequent signal anomalies in R&D debug, the mask test option can be a valuable productivity tool. The 2000 X-Series features hardware-based mask testing and can perform up to 50,000 tests per second.

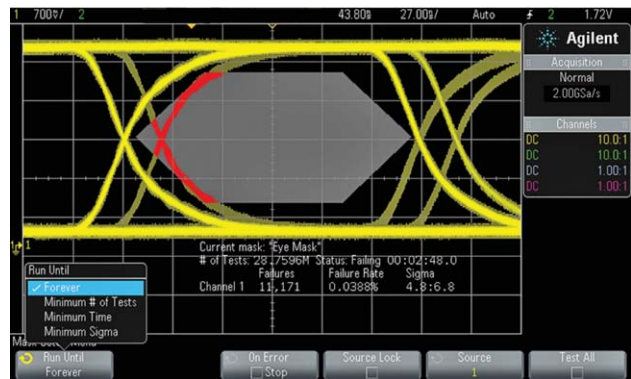

### Segmented memory

When capturing low-duty cycle pulses or data bursts, you can use segmented memory acquisition to optimize acquisition memory. Segmented memory acquisition lets you selectively capture and store important segments of signals without capturing unimportant signal idle/dead-time. Segmented memory acquisition is ideal for applications including packetized serial pulses, pulsed laser, radar bursts and high-energy physics experiments. Up to 25 segments can be captured on the 2000 X-Series models with a minimum re-arm time under 19  $\mu$ s.

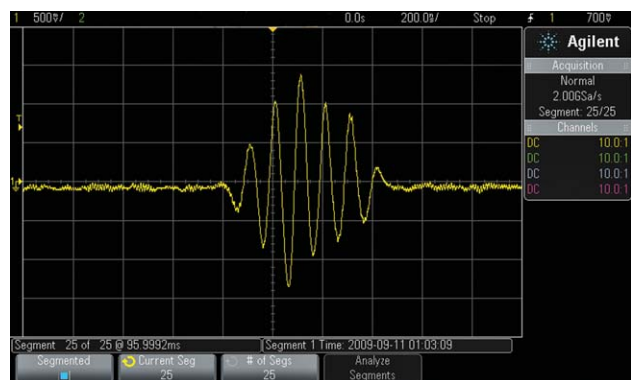

### 30-day trial license


The 2000 X-Series comes with a one-time 30-day all-optional-features trial license. You can choose to start the 30-day trial at any time. In addition you can redeem individual optional feature 30-day trial licenses at any time by visiting [www.agilent.com/find/30daytrial](http://www.agilent.com/find/30daytrial). This enables you to receive in effect 60 days of trial license of each optional feature.

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Other productivity tools

### Reference waveforms

Store up to two waveforms in the scope's non-volatile reference waveform memory locations. Compare these reference waveforms with live waveforms, and perform post analysis and measurements of stored data. You can also store waveform data on a removable USB memory device that can be recalled back into one of the available two reference memories of the scope for full waveform measurement and analysis. Save and/or transfer waveforms as XY data pairs in a comma-separated values format (\*.csv) for PC analysis. Save screen images to a PC for documentation purposes in a variety of formats including: 8-bit bitmaps (\*.bmp), 24-bit bitmaps (\*.bmp), and PNG 24-bit images (\*.png).

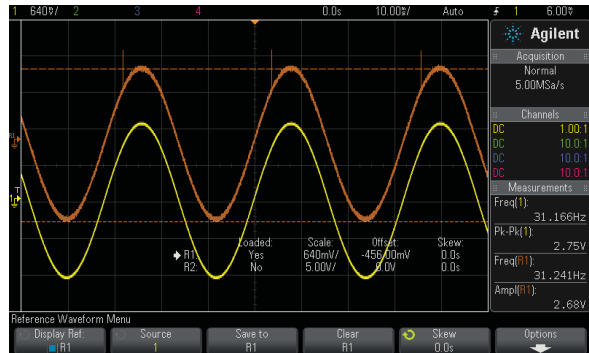

### Localized GUI and help

Operate the scope in the language most familiar to you. The graphical user interface, built-in help system, front panel overlays, and user's manual are available in 13 languages. Choose from: English, Japanese, simplified Chinese, traditional Chinese, Korean, German, French, Spanish, Russian, Portuguese, Thai, Polish and Italian. During operation, access the built-in help system just by pressing and holding any button.



### Probe solutions

Get the most out of your 2000 X-Series scope, by using the right probes and accessories for your application. Agilent offers a complete family of innovative probes and accessories for the InfiniiVision 2000 X-Series scopes. For the most up-to-date and complete information about Agilent's probes and accessories, please visit our Web site at [www.agilent.com/find/scope\\_probes](http://www.agilent.com/find/scope_probes).



### Autoscale

Quickly display any active signals and automatically set the vertical, horizontal and trigger controls for optimal viewing with the press of the autoscale button. (This feature can be disabled or enabled for the education environment via a USB thumb drive file with a SCPI remote command).



# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Other productivity tools

### Connectivity and LXI Compatibility

Built-in USB host (one front, one back) and USB device ports make PC connectivity easy. Operate the scope from your PC and save and recall stored waveforms as well as set-up files via LAN. An optional LAN/VGA module gives you network connectivity and complete LXI class C support as well as the ability to connect to an external monitor. An optional GPIB module is also available. Only one module may be used at a time.

Intuilink toolbars and Data Capture gives you a quick way to move screen shots and data into Microsoft Word® and Excel. These toolbars can be installed from [www.agilent.com/find/intuilink](http://www.agilent.com/find/intuilink)

View Scope enables simple and free time-correlated measurements between a 2000 X-Series oscilloscope and an Agilent 16900, 16800, 1690 or 1680 Series logic analyzer.



### Virtual Front Panel

In addition to the traditional VNC virtual front panel remote operation through your favorite PC Web browser, the InfiniiVision X-Series supports remote oscilloscope control from your tablet devices. The tablet virtual front panel looks and acts as the real front panel on the oscilloscope. Control the setting, save/recall data, get image, and more.



### Secure erase

The secure erase feature comes standard with all InfiniiVision X-Series models. At the press of a button, internal nonvolatile memory is clear of all setup, reference waveforms, and user preferences, ensuring the highest level of security in compliance with National Industrial Security Program Operation Manual (NISPOM) Chapter 8 requirements.





# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Other productivity tools

### InfiniiView Oscilloscope Analysis Software (N8900A)

Agilent's InfiniiView PC-based analysis oscilloscope software allows you to do additional signal viewing, analysis and documentation tasks away from your scope. Capture waveforms on your scope, save to a file, and recall the waveforms into InfiniiView. The application supports a variety of popular waveform formats from multiple oscilloscope vendors and includes the following features:



View and analyze away from your scope and target system

#### Navigate

- Pan and zoom to anywhere in the data record. Navigate in time, or between bookmarks.

#### View

- Up to 8 waveforms simultaneously, 1, 2, or 4 grids (stacked, side by side, custom layout, zoom)

#### Measurements

- Over 50 automated measurements
- View up to 20 simultaneously
- User-customizable result window (size, position, information)
- X & Y markers with dynamic delta values

#### Analyze

- 20 math operators including FFT and filters
- Up to four independent/cascaded math functions
- Measurement histogram

#### View Windows


- Analog, math, spectral, measurement results (simultaneous, tabbed, or undocked)

#### Documentation

- Right-click to copy
- Up to 100 bookmarks
- Annotated axis values
- Markers with dynamic delta value updates when moved
- One step save/load setup and all waveforms

#### Analysis Upgrades (Optional)

- Protocol decode for I<sup>2</sup>C/SPI, RS232/UART, CAN/ LIN/FlexRay, SATA, 8B/10B, digRF v4, JTAG, MIPI D-Phy, SVID, Ethernet 10G KR, PCIe 1, 2, 3, USB 2, 3, HSIC
- Jitter analysis
- Serial data analysis

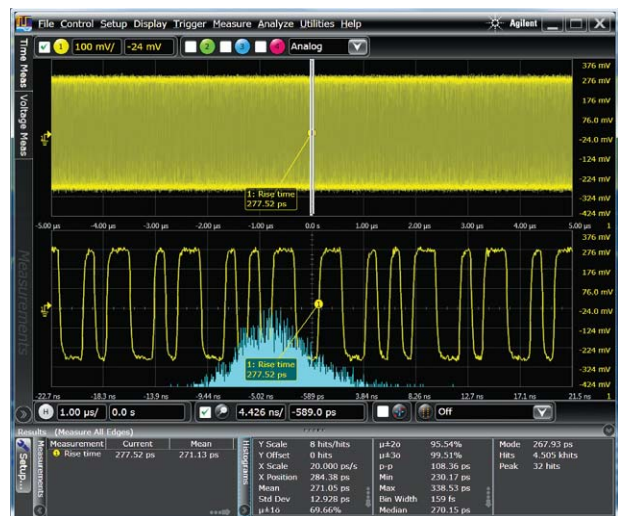

Use familiar scope controls to quickly navigate and zoom in to any event of interest.



Add bookmarks and call outs to produce friendly and useful documentation.

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Other productivity tools

### Agilent Spectrum Visualizer (ASV) Software

This PC-based software package connects to the scope via USB or ethernet connection and uses the Agilent I/O libraries to communicate. It provides advanced FFT frequency domain analysis at a cost-effective price as well as spectrum and spectrogram analysis with an intuitive user interface that RF engineers are familiar with. Tools include:

#### Spectrum Measurements


- Power (dBm) vs. frequency
- Horizontal (x-axis): Specify center frequency and frequency span, or start and stop frequencies
- Vertical (y-axis): Specify reference level (dBm) and scale (dB/div)
- Settable resolution bandwidth
- Flat top, Gaussian, or Hanning windows applied to the time domain data for the FFT analysis
- Marker to peak amplitude, and marker to center frequency.
- Marker peak search can be enabled for time-varying signals
- Multiple marker, with delta X and delta Y readouts

#### Acquisition and Display Modes


- Free Run (continuous), Triggered, Stop, Single, Preset
- Triggered mode: specify trigger power level (dBm), single or continuous sweep
- Enable/disable y-axis label
- Enable/disable main trace display
- Max hold display mode
- Gated Measurements
- Multiple viewing options
  - Spectrogram
  - waterfall
  - 3D
- Changeable scaling settings on main window
- Local language support
- Multiple oscilloscopes can be configured to allow user to rapidly switch between multiple instruments

#### Arbitrary Waveform Generator Source Control

- 20 MHz sine wave
- 10 MHz square wave
- Pulsed waveform
- WaveGen source settings can be altered while ASV is running for interactive signal source and analysis capability

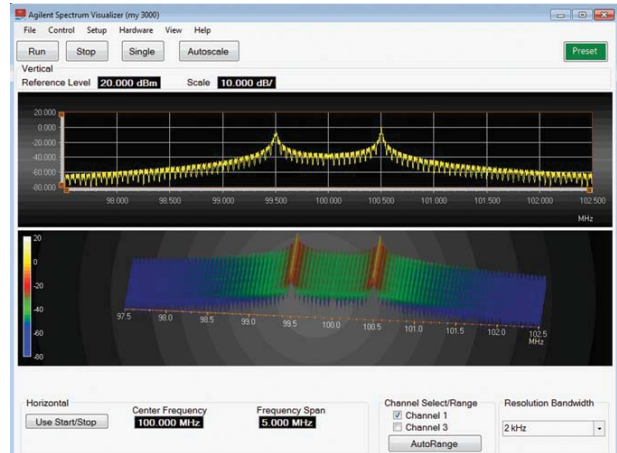

Waterfall View for ASV Spectrogram Measurement

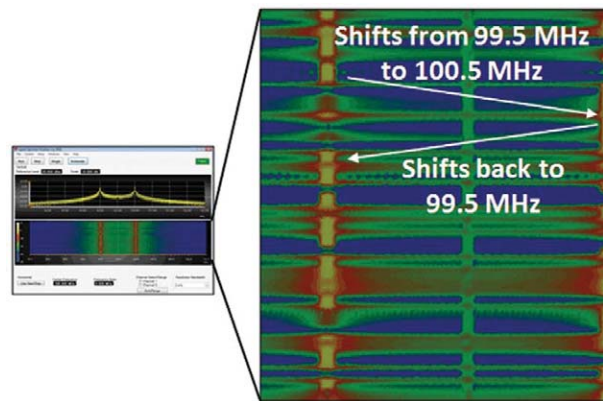

Close-Up Detail on Frequency Shift Keying (FSK) Characteristics with the ASV Spectrogram Measurement

## Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

### Designed with education in mind

#### Quickly and easily set up or upgrade a teaching lab

Teach your students what an oscilloscope is and how to perform basic measurements with the Educator's Oscilloscope Training Kit (DSOXEDK). It includes training tools created specifically for electrical engineering and physics undergraduate students and professors. It contains an array of built-in training signals, a comprehensive oscilloscope lab guide and tutorial written specifically for the undergraduate student, and an oscilloscope fundamentals PowerPoint slide set for professors and lab assistants. For more information, refer to [www.agilent.com/find/EDK](http://www.agilent.com/find/EDK). Also available are DreamCatcher's full semester application-specific courseware written around Agilent test and measurement equipment: [www.dreamcatcher.asia/cw](http://www.dreamcatcher.asia/cw). With features such as the ability to disable autoscale and the 50- Ohm input data path, the InfiniiVision X-Series is a perfect choice for education.



#### Get your students to quickly put the scope to work

Intuitive localized front panel design with pushable knobs for quick access to commonly used oscilloscope functions helps students spend more time learning the concepts and less time learning how to use the oscilloscope. Enable your students to answer their own questions with the localized built-in help system that provides quick access by simply pressing and holding any button.

#### Stretch your budget over the long term

Save money with an industry-exclusive built-in 20 MHz WaveGen, instead of a separate function generator. Buy what you need today and protect your investment in the future with the only oscilloscopes in this class with upgradable bandwidth, 8 digital channels (MSO), WaveGen, integrated digital voltmeter and measurement applications. Get long scope life and keep repair costs to a minimum with a standard 5-year warranty\*, and an instrument reliability you've come to expect from the leader in test and measurement equipment.

\*Applies to all orders on or after 1/1/2013.


#### Optimize lab bench space

With 5 instruments in 1, you will save on precious lab bench space by getting an oscilloscope, logic timing analyzer, serial protocol analyzer, WaveGen function generator and integrated digital voltmeter all in one innovative instrument with a footprint that is only 5.57 inches deep. With the large 8.5-inch WVGA display, you can easily view all signals on one screen with enough viewing area for more than one student to view.

**DSOXEDK Educator's Oscilloscope Training Kit**


Lab Guide and Tutorial for Undergraduate Electrical Engineering and Physics Students


Agilent Technologies

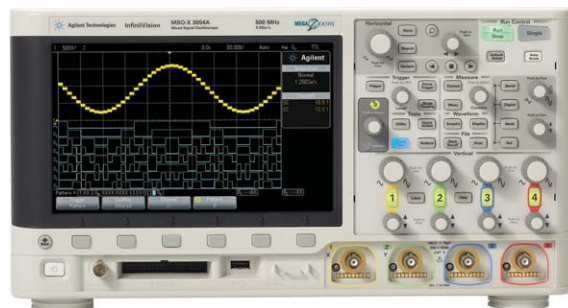

Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Oscilloscope shown actual size

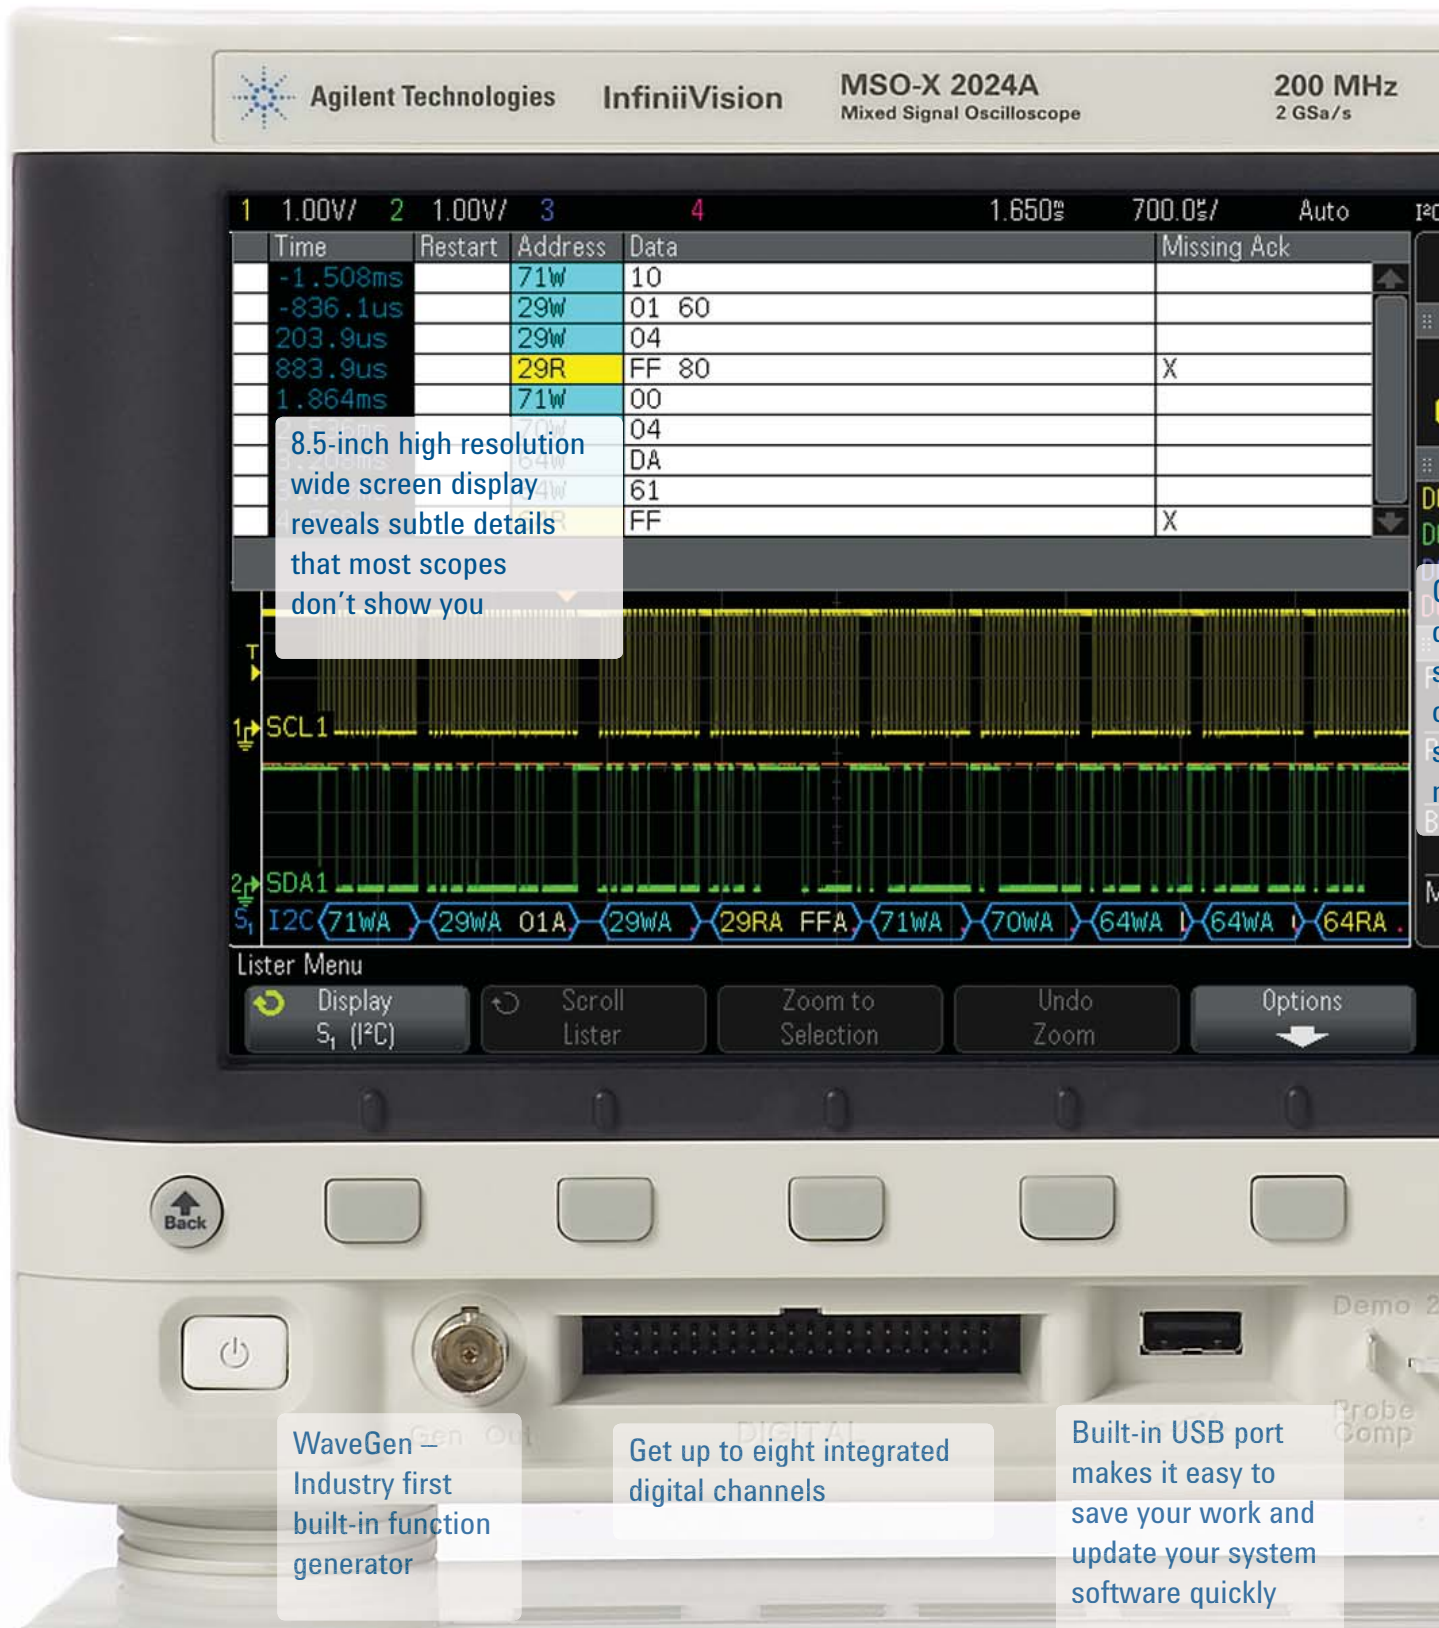

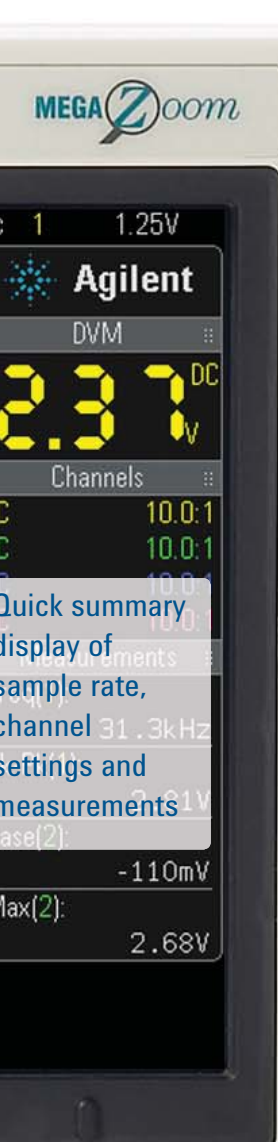

Navigation front panel controls make it easy to play, stop, rewind and fast forward through waveforms

Quickly pan and zoom for analysis with *MegaZoom IV's* instant response and optimum resolution


Autoscale lets you quickly display any analog or digital active signals, automatically setting the vertical, horizontal and trigger controls for the best display, while optimizing memory

Dedicated keys for quick access to digital channels, serial analysis, math functions and reference waveforms

All front panel knobs are pushable

Demo and training signals

Integrated digital voltmeter

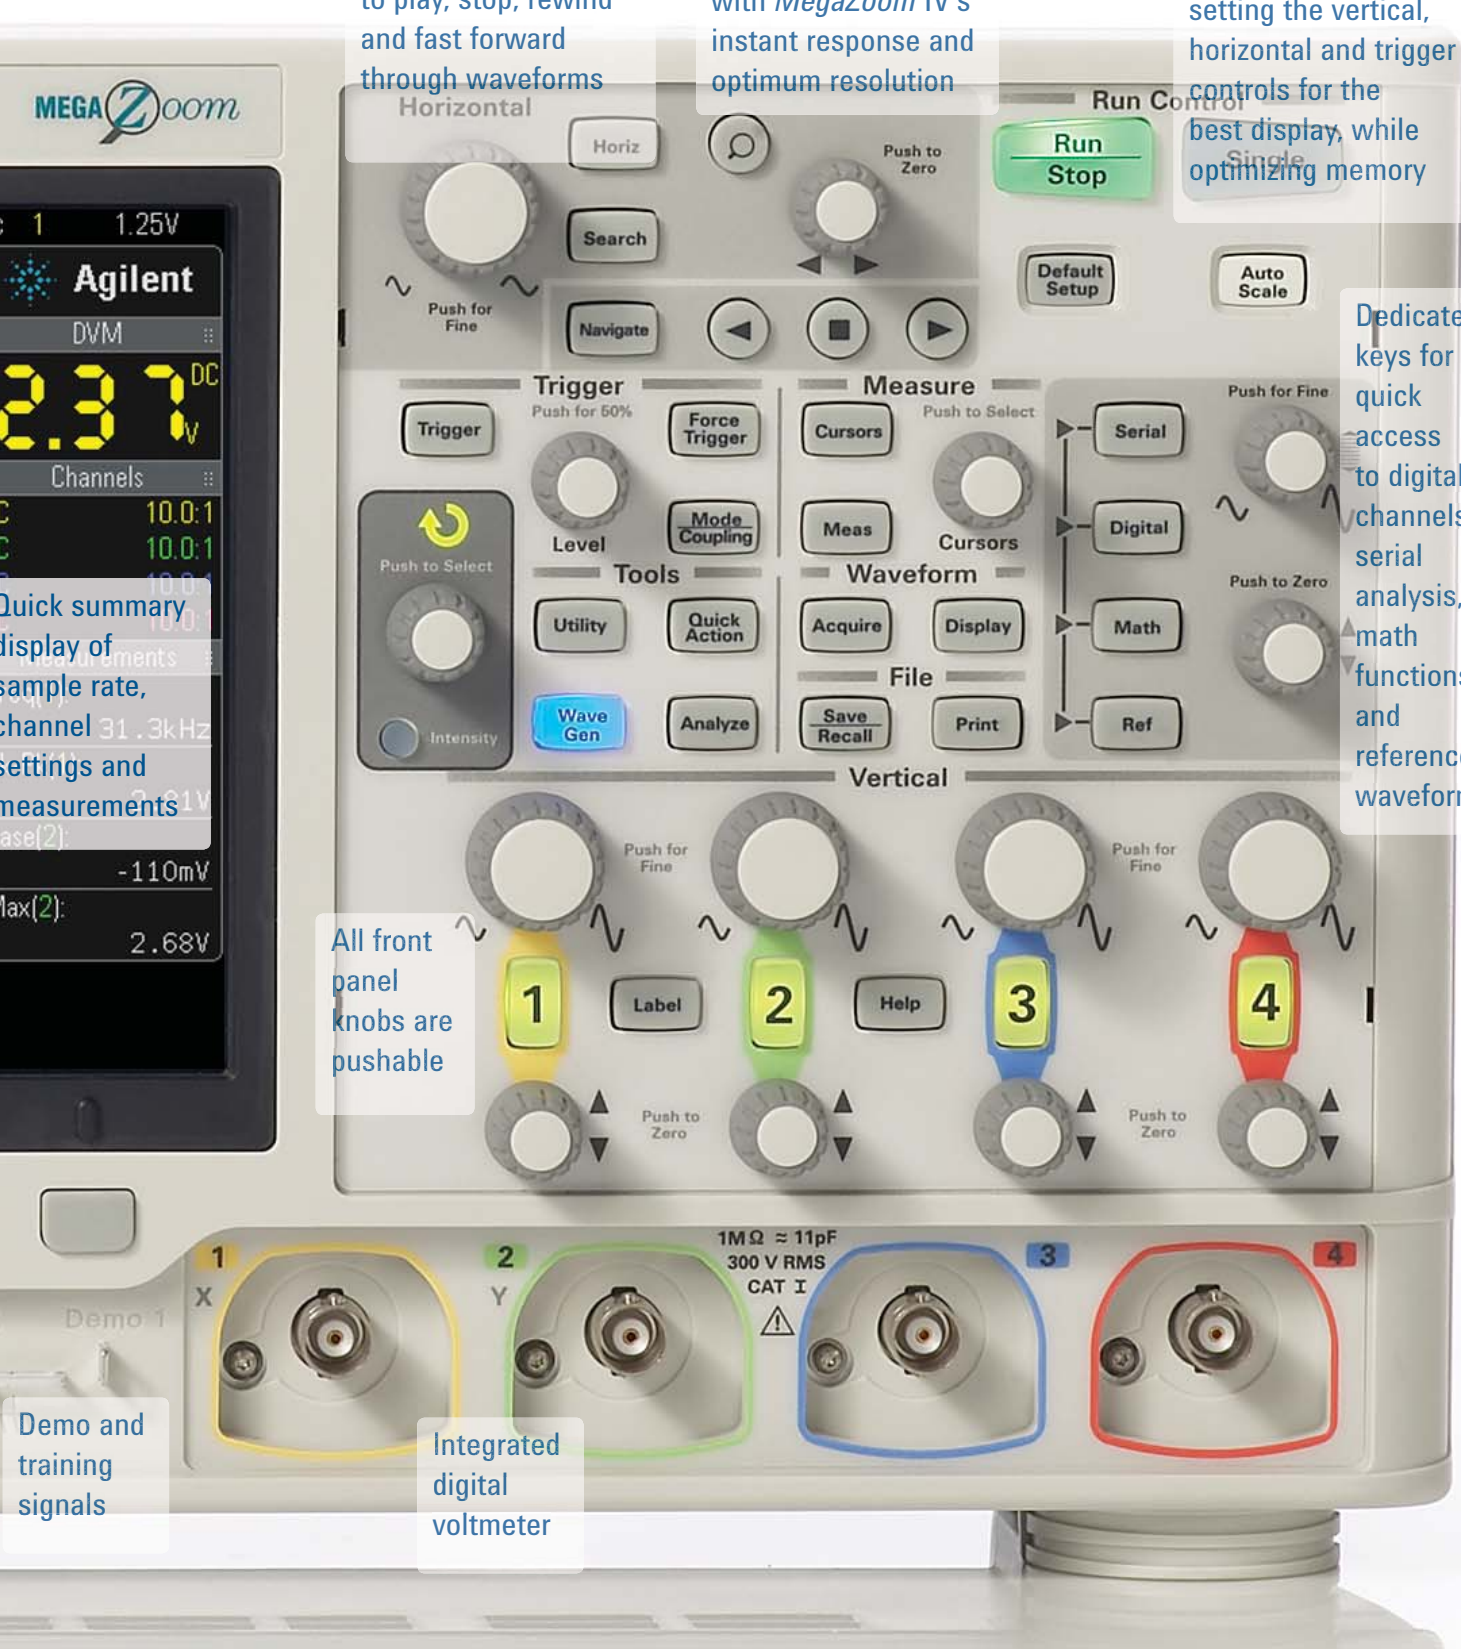

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Configuring your InfiniiVision X-Series oscilloscope

### Step 1. Choose your bandwidth and channel count.

| InfiniiVision 2000 X-Series scopes |      |        |       |          |       |           |       |
|------------------------------------|------|--------|-------|----------|-------|-----------|-------|
|                                    |      | 2002A  | 2004A | 2012A    | 2014A | 2022A     | 2024A |
| Bandwidth* (-3 dB)                 |      | 70 MHz |       | 100 MHz  |       | 200 MHz   |       |
| Calculated rise time (10-90%)      |      | ≤ 5 ns |       | ≤ 3.5 ns |       | ≤ 1.75 ns |       |
| Input channels                     | DSOX | 2      | 4     | 2        | 4     | 2         | 4     |
|                                    | MSOX | 2 + 8  | 4 + 8 | 2 + 8    | 4 + 8 | 2 + 8     | 4 + 8 |

\* For example, if you chose 100 MHz, 2+8 channels, the model number will be MSOX2014A.

### Step 2. Tailor your scope with measurement applications to save time and money<sup>1</sup>

| Application   | 2000 X-Series       |
|---|---------------------|
| 1 Megapoint memory upgrade                                      | DSOX2MEMUP (-010)   |
| Embedded serial triggering and analysis (I <sup>2</sup> C, SPI) | DSOX2EMBD (-LSS)    |
| Computer serial triggering and analysis (RS232/422/485/UART)    | DSOX2COMP (-232)    |
| Automotive serial triggering and analysis (CAN, LIN)            | DSOX2AUTO (-AMS)    |
| WaveGen (built-in function generator)                           | DSOX2WAVEGEN (-001) |
| Integrated digital voltmeter                                    | DSOX2DVM (-DVM)     |
| Educator's kit  | DSOX2EDK (-EDK)     |
| Mask testing  | DSOX2MASK (-LMT)    |
| Segmented memory  | DSOX2SGM (-SGM)     |
| InfiniView oscilloscope analysis software                       | N8900A              |
| Agilent spectrum visualizer (ASV)                               | 64997A              |

1. See pages 20-21 for more detailed information on upgradability, and installation process.

### Step 3. Choose your probes<sup>2</sup>

| Probes  | 2000 X-Series                                      |
|---|--|
| N2862B 150 MHz 10:1 passive probe                                   | Standard one per channel for 70 and 100 MHz models |
| N2863B 300 MHz, 10:1 passive probe                                  | Standard one per channel for 200 MHz models        |
| N6459-60001 8-channel logic probe and accessory kit                 | Standard on MSO models or with DSOX2MSO upgrade    |
| N2889A 350 MHz 10:1/1:1 passive probe                               | Optional   |
| 10070D 20 MHz 1:1 passive probe with probe ID                       | Optional   |
| 10076A 250 MHz 100:1, 4 kV high-voltage passive probe with probe ID | Optional   |
| N2791A 25 MHz, ±700 V high-voltage differential probe               | Optional   |
| N2792A 200 MHz 10:1 differential probe                              | Optional   |
| 1146A 100 kHz, 100 A, AC/DC current probe                           | Optional   |

2. See page 20 for probe compatibility table. For more information on probes and accessories, see the Agilent literature 5968-8153EN

### Step 4. Add the final touches.

| Recommended accessories                  | 2000 X-Series |
|--|---------------|
| LAN/VGA connection module                | DSOXLAN       |
| GPIB connection module                   | DSOXGPIB      |
| Rack mount kit                           | N6456A        |
| Soft carrying case and front panel cover | N6457A        |
| Hard copy manual                         | N6458A        |
| Front panel cover (only)                 | N2747A        |

## Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

### Performance characteristics

| Specification overview            |                 |   |       |          |                      |           |       |
|-----------------------------------|-----------------|---|-------|----------|----------------------|-----------|-------|
|                                   |                 | 2002A   | 2004A | 2012A    | 2014A                | 2022A     | 2024A |
| Bandwidth * (-3 dB)               |                 | 70 MHz  |       | 100 MHz  |                      | 200 MHz   |       |
| "Calculated rise time (10-90%)"   |                 | ≤ 5 ns  |       | ≤ 3.5 ns |                      | ≤ 1.75 ns |       |
| Input channels                    | DSOX            | 2   | 4     | 2        | 4                    | 2         | 4     |
|                                   | MSOX            | 2 + 8   | 4 + 8 | 2 + 8    | 4 + 8                | 2 + 8     | 4 + 8 |
| Maximum sample rate               |                 | 2 GSa/s half-channel interleaved, 1 GSa/s per channel   |       |          |                      |           |       |
| Maximum memory depth              |                 | 100 kpts per channel (standard), 1 Mpt per channel (optional with DSOX2MEMUP)   |       |          |                      |           |       |
| Display size and type             |                 | 8.5-inch WVGA with 64 levels of intensity grading   |       |          |                      |           |       |
| Waveform update rate              |                 | > 50,000 waveforms per second   |       |          |                      |           |       |
| Vertical system analog channels   |                 |   |       |          |                      |           |       |
| Input coupling                    |                 | AC, DC  |       |          |                      |           |       |
| Input sensitivity range           |                 | 1 mV/div to 5 V/div**   |       |          |                      |           |       |
| Input impedance                   |                 | 1 MΩ ± 2% (11 pF)   |       |          |                      |           |       |
| Vertical resolution               |                 | 8 bits  |       |          |                      |           |       |
| Dynamic range                     |                 | ±8 divisions from center screen   |       |          |                      |           |       |
| Maximum input voltage             |                 | CAT I 300 Vrms, 400 Vpk; transient overvoltage 1.6 kVpk<br>CAT II 300 Vrms, 400 Vpk; with N2862B or N2863B 10:1 probe: 300 Vrms |       |          |                      |           |       |
| DC vertical accuracy              |                 | ±[DC vertical gain accuracy + DC vertical offset accuracy + 0.25% full scale] **  |       |          |                      |           |       |
| DC vertical gain accuracy*        |                 | ±3% full scale (≥ 10 mV/div); ±4% full scale (< 10 mV/div) **   |       |          |                      |           |       |
| DC vertical offset accuracy       |                 | ±0.1 div ± 2mV ±1% of offset setting  |       |          |                      |           |       |
| Channel-to-channel isolation      | 200 MHz ~ 1 GHz | ≥ 40 dB from DC to maximum specified bandwidth of each model  |       |          |                      |           |       |
|                                   | 1.5 GHz         | ≥ 40 dB from DC to 1 GHz, ≥ 35 dB from 1 GHz to 1.5 GHz   |       |          |                      |           |       |
| Position/offset range             | 1 MΩ            | 1 mV to 200 mV/div: ±2 V, > 200 mV to 5 V/div: ± 50V  |       |          |                      |           |       |
| Hardware bandwidth limits         |                 | Approximately 20 MHz (selectable)   |       |          |                      |           |       |
| Horizontal system analog channels |                 |   |       |          |                      |           |       |
| Time base range                   |                 | 5 ns/div to 50 s/div  |       |          | 2 ns/div to 50 s/div |           |       |
| Horizontal resolution             |                 | 2.5 ps  |       |          |                      |           |       |
| Time base accuracy*               |                 | 25 ppm ±5 ppm per year (aging)  |       |          |                      |           |       |
| Time base delay time range        | Pre-trigger     | Greater of 1 screen width or 200 μs (400 μs in interleaving mode)   |       |          |                      |           |       |
|                                   | Post-trigger    | 1 s to 500 s  |       |          |                      |           |       |
| Channel-to-channel deskew range   |                 | ± 100 ns  |       |          |                      |           |       |
| Δ Time accuracy (using cursors)   |                 | ± (time base accuracy* reading) ± (0.0016 * screen width) ± 100 ps  |       |          |                      |           |       |

\* Denotes warranted specifications, all others are typical.

Specifications are valid after a 30-minute warm-up period and from ±10 °C firmware calibration temperature.

\*\* 1 mV/div and 2 mV/div is a magnification of 4 mV/div setting. For vertical accuracy calculations, use full scale of 32 mV for 1 mV/div and 2 mV/div sensitivity setting.

## Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

### Performance characteristics

#### Acquisition modes

|                      |   |
|----------------------|---|
| Normal               |   |
| Peak detect          | Capture glitch as narrow as 500 ps at all timebase settings.        |
| Averaging            | Select from 2,4,8,16, 64... to 65,536                               |
| High resolution mode | 12 bits of resolution when $\geq 20 \mu\text{s}/\text{div}$         |
| Segmented            | Re-arm time= 19 $\mu\text{s}$ (minimum time between trigger events) |

#### Trigger system

|                                 |   |
|---------------------------------|---|
| Trigger modes                   | <ul style="list-style-type: none"> <li>• Normal (triggered): requires trigger event for scope to trigger</li> <li>• Auto: triggers automatically in absence of trigger event</li> <li>• Single: triggers only once on a trigger event, press [<b>Single</b>] again for scope to find another trigger event, or press [<b>Run</b>] to trigger continuously in either Auto or Normal mode</li> <li>• Force: front panel button that forces a trigger</li> </ul> |
| Trigger coupling                | Coupling selections: AC, DC, noise reject, LF reject and HF reject.   |
| Trigger source                  | Each analog channel, each digital channel (MSO models or DSOX2MSO upgrade, Ext, WaveGen, line)  |
| Trigger sensitivity (internal)* | < 10 mV/div: greater of 1 div or 5 mV; $\geq 10 \text{ mV}/\text{div}$ : 0.6 div  |
| Trigger sensitivity (external)* | 200 mV (DC to 100 MHz); 350 mV (100 MHz - 200 MHz)  |
| External trigger input          | Included on all models  |

#### Trigger type selections

|                               |   |
|-------------------------------|---|
|                               | All 2000 X-Series models  |
| Edge                          | Trigger on a rising, falling, alternating or either edge of any source  |
| Pulse width                   | Trigger on a pulse on a selected channel, whose time duration is less than a value, greater than a value, or inside a time range <ul style="list-style-type: none"> <li>• Minimum duration setting: 2 ns- 10 ns (depends on bandwidth)</li> <li>• Maximum duration setting: 10 s</li> </ul> |
| Pattern                       | Trigger when a specified pattern of high, low, and don't care levels on any combination of analog, digital, or trigger channels is [entered   exited]. Pattern must have stabilized for a minimum of 2 ns to qualify as a valid trigger condition.  |
| Video                         | Trigger on all lines or individual lines, odd/even or all fields from composite video, or broadcast standards (NTSC, PAL, SECAM, PAM-M)   |
| I <sup>2</sup> C (optional)   | Trigger on I <sup>2</sup> C (Inter-IC bus) serial protocol at a start/stop condition or user defined frame with address and/or data values. Also trigger on missing acknowledge, address with no accq, restart, EEPROM read, and 10-bit write.  |
| SPI (optional)                | Trigger on SPI (Serial Peripheral Interface) data pattern during a specific framing period. Supports positive and negative Chip Select framing as well as clock Idle framing and userspecified number of bits per frame.  |
| CAN (optional)                | Trigger on CAN (controller area network) version 2.0A and 2.0B signals. Trigger on the start of frame (SOF) bit (standard). Remote frame ID (RTR), data frame ID (~RTR), remote or data frame ID, data frame ID and data, error frame, all errors, acknowledge error and overload frame.    |
| LIN (optional)                | Trigger on LIN (Local Interconnect Network) sync break, sync frame ID, or frame ID and data.  |
| RS232/422/485/UART (optional) | Trigger on Rx or Tx start bit, stop bit or data content   |

\* Denotes warranted specifications, all others are typical.  
Specifications are valid after a 30-minute warm-up period and from  $\pm 10 \text{ }^\circ\text{C}$  firmware calibration temperature.



# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Performance characteristics

| Cursors                          |  |
|----------------------------------|--|
| Types                            | Amplitude, time , frequency (FFT), manual, tracking, binary, HEX   |
| Measurements                     | $\Delta T$ , $1/\Delta T$ , $\Delta V/X$ , $1/\Delta X$ , $\Delta Y$ , Phase and Ratio   |
| Cursors**                        | <ul style="list-style-type: none"> <li>• Single cursor accuracy:<br/> <math>\pm[\text{DC vertical gain accuracy} + \text{DC vertical offset accuracy} + 0.25\% \text{ full scale}]</math></li> <li>• Dual cursor accuracy:<br/> <math>\pm[\text{DC vertical gain accuracy} + 0.5\% \text{ full scale}]^*</math></li> </ul> |
| Automatic waveforms measurements |  |
| Voltage                          | Snapshot all, maximum, minimum, peak-to-peak, top, base, amplitude, overshoot, preshoot, average- N cycles, average-full screen, DC RMS- N cycles, DC RMS- full screen, AC RMS- N cycles   |
| Time                             | Period, frequency, rise time, fall time, + width, – width, duty cycle, delay A→B (rising edge), delay A→B (falling edge), phase A→B (rising edge,) and phase A→B (falling edge)  |
| Waveform math                    |  |
| Operators                        | Add, subtract, multiply, FFT   |
| FFT                              | Windows: Hanning, flat top, rectangular; Blackman-Harris - up to 64 kpts resolution  |
| Sources                          | Math functions available between any two channels  |
| Display characteristics          |  |
| Display                          | 8.5-inch WVGA  |
| Resolution                       | 800 (H) x 480 (V) pixel format (screen area)   |
| Interpolation                    | Sin(x)/x interpolation (using FIR filter; used when there is less than one sample per column of the display)   |
| Persistence                      | Off, infinite, variable persistence (100ms-60s)  |
| Intensity gradation              | 64 intensity levels  |
| Modes                            | Normal<br>XY - XY mode changes the display from voltage versus time scale to a volts versus volts scale<br>Roll – Displays the waveform moving across the screen from right to left much like a strip chart recorder   |
| MSO (digital channels)           |  |
| Upgradable from DSO              | Yes  |
| MSO channels                     | 8 channels (D0 to D7)  |
| Maximum sample rate              | 1 GSa/s  |
| Maximum record length            | 50 kpts per channel (digital channels only)<br>12.5 kpts per channel (analog and digital channels)   |
| Threshold selections             | TTL (+1.4 V), CMOS (+2.5 V), ECL (-1.3 V), User-definable ( $\pm 8.0$ V in 10 mV stops)  |
| Threshold accuracy*              | $\pm (100 \text{ mV} + 3\% \text{ of threshold settings})$   |
| Maximum input dynamic range      | $\pm 10$ V about threshold   |
| Minimum voltage swing            | 500 mVpp   |
| Input impedance                  | 100 k $\Omega$ $\pm$ 2% at probe tip, ~8 pF  |
| Minimum detectable pulse width   | 5 ns   |
| Channel-to-channel skew          | 2 ns (typical), 3 ns (maximum)   |

\* Denotes warranted specifications, all others are typical.  
Specifications are valid after a 30-minute warm-up period and from  $\pm 10$  °C firmware calibration temperature.

\*\* 1 mV/div and 2 mV/div is a magnification of 4 mV/div setting. For vertical accuracy calculations, use full scale of 32 mV for 2 mV/div sensitivity setting.

## Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

### Performance characteristics

| WaveGen – built-in function generator (specifications are typical) |   |
|--|---|
| Waveforms  | Sine, square, pulse, triangle, ramp, noise, DC  |
| Sine   | <ul style="list-style-type: none"> <li>• Frequency range: 0.1 Hz to 20 MHz</li> <li>• Amplitude flatness: <math>\pm 0.5</math> dB (relative to 1 kHz)</li> <li>• Harmonic distortion: <math>-40</math> dBc</li> <li>• Spurious (non harmonics): <math>-40</math> dBc</li> <li>• Total harmonic distortion: 1%</li> <li>• SNR (50 ohm load, 500 MHz BW) : 40 dB (<math>V_{pp} \geq 0.1</math> V); 30 dB (<math>V_{pp} &lt; 0.1</math> V)</li> </ul>  |
| Square wave/pulse  | <ul style="list-style-type: none"> <li>• Frequency range: 0.1 Hz to 10 MHz</li> <li>• Duty cycle: 20 to 80%</li> <li>• Duty cycle resolution: Larger of 1% or 10 ns</li> <li>• Pulse width: 20 ns minimum</li> <li>• Pulse width resolution: 10 ns or 5 digits, whichever is larger</li> <li>• Rise/fall time: 18 ns (10 to 90%)</li> <li>• Overshoot: <math>&lt; 2\%</math></li> <li>• Asymmetry (at 50% DC): <math>\pm 1\% \pm 5</math> ns</li> <li>• Jitter (TIE RMS): 500 ps</li> </ul>   |
| Ramp/triangle wave   | <ul style="list-style-type: none"> <li>• Frequency range: 0.1 Hz to 100 kHz</li> <li>• Linearity: 1%</li> <li>• Variable symmetry: 0 to 100%</li> <li>• Symmetry resolution: 1%</li> </ul>  |
| Noise  | Bandwidth: 20 MHz typical   |
| Frequency  | <ul style="list-style-type: none"> <li>• Sine wave and ramp accuracy: <ul style="list-style-type: none"> <li>◦ 130 ppm (frequency <math>&lt; 10</math> kHz)</li> <li>◦ 50 ppm (frequency <math>&gt; 10</math> kHz)</li> </ul> </li> <li>• Square wave and pulse accuracy: <ul style="list-style-type: none"> <li>◦ <math>[50 + \text{frequency}/200]</math> ppm (frequency <math>&lt; 25</math> kHz)</li> <li>◦ 50 ppm (frequency <math>\geq 25</math> kHz)</li> </ul> </li> <li>• Resolution: 0.1 Hz or 4 digits, whichever is larger</li> </ul> |
| Amplitude  | <ul style="list-style-type: none"> <li>• Range: <ul style="list-style-type: none"> <li>◦ 20 mVpp to 5 Vpp into Hi-Z</li> <li>◦ 10 mVpp to 2.5 Vpp into 50 ohms</li> </ul> </li> <li>• Resolution: 100 <math>\mu</math>V or 3 digits, whichever is larger</li> <li>• Accuracy: 2% (frequency = 1 kHz)</li> </ul>   |
| DC offset  | <ul style="list-style-type: none"> <li>• Range: <ul style="list-style-type: none"> <li>◦ <math>\pm 2.5</math> V into Hi-Z</li> <li>◦ <math>\pm 1.25</math> V into 50 ohms</li> </ul> </li> <li>• Resolution: 100 <math>\mu</math>V or 3 digits, whichever is larger</li> <li>• Accuracy: <math>\pm 1.5\%</math> of offset setting <math>\pm 1.5\%</math> of amplitude <math>\pm 1</math> mV</li> </ul>  |
| Trigger output   | Trigger output available on Trig out BNC  |

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## Performance characteristics

### WaveGen – built-in function generator (specifications are typical) *(Continued)*

|            |   |
|------------|---|
| Modulation | <p>Modulation types: AM, FM, FSK<br/>           Carrier waveforms: sine, ramp<br/>           Modulation source: Internal (no external modulation capability)</p> <p>AM:<br/>           Modulation waveform: sine, square, ramp<br/>           Modulation frequency (1 Hz to 20 kHz)<br/>           Depth: 0% to 100%</p> <p>FM:<br/>           Modulation: sine, square, ramp (1 Hz to 20 kHz)<br/>           Modulation frequency (1 Hz to 20 kHz)<br/>           Minimum carrier frequency: 10 kHz<br/>           Minimum deviation: 1 Hz<br/>           Maximum deviation: 100 kHz or (carrier frequency - 9 kHz), whichever is smaller.</p> <p>FSK:<br/>           Modulation: 50% duty cycle square wave<br/>           FSK rate: 1 Hz to 20 kHz<br/>           Minimum carrier frequency: 10 kHz<br/>           Minimum hop frequency: 2 * FSK rate</p> |
|------------|---|

### Integrated Digital Voltmeter

|                |   |
|----------------|---|
| Functions      | ACrms, DC, DCrms, Frequency   |
| Resolution     | ACV/DCV: 3 digits Frequency: 5.5 digits   |
| Measuring rate | 100 times/ second   |
| Autoranging    | Automatic adjustment of vertical amplification to maximize the dynamic range of measurements. |
| Range meter    | Graphical display of most recent measurement, plus extrema over the previous 3 seconds.       |

### Measurement range (specifications are typical)

|                   | Frequency Range   | Vertical Range  | Vertical Accuracy  |
|-------------------|-------------------|---|--|
| ACRms             | 20 Hz - 100 KHz   | 100 MHz to 500 MHz: 1 mV/div to 5 V/div** (1 MΩ and 50 Ohm)           | [DC vertical gain accuracy + 0.5% full scale                                 |
| DCRms             | 20 Hz - 100 KHz   | 1 GHz model: 1 mV/div to 5 V/div** (1 MΩ), 1mV/div to 1V/div (50 Ohm) | [DC vertical gain accuracy + DC vertical offset accuracy + 0.25% full scale] |
| DC                | NA                |   | [DC vertical gain accuracy + DC vertical offset accuracy + 0.25% full scale] |
| Frequency counter | 1Hz – BW of Scope | <10 mV/div: greater of 1 div or 5 mV; ≥ 10 mV/div: 0.6 div            | 25 ppm ± 5 ppm per year (aging)  |

## Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

### InfiniiVision X-Series physical characteristics

#### Connectivity

|                |  |
|----------------|--|
| Standard ports | One USB 2.0 hi-speed device port on rear panel. Supports USBTMC protocol.<br>Two USB 2.0 hi-speed host ports, front and rear panel<br>Supports memory devices and printers |
| Optional ports | GPIO, LAN, WVGA video out  |

#### General and environmental characteristics

|                               |   |
|-------------------------------|---|
| Power line consumption        | 100 watts   |
| Power voltage range           | 100-120V, 50/60/400 Hz; 100-240V, 50/60 Hz $\pm$ 10% auto ranging   |
| Temperature                   | Operating: 0 to +55 °C<br>Non-operating: -30 to +71 °C  |
| Humidity                      | Operating: Up to 80% RH at or below +40 °C; up to 45% RH up to +50 °C<br>Non-operating: Up to 95% RH up to 40 °C; up to 45% RH up to 50 °C  |
| Altitude                      | Operating: up to 4,000 m, Non-operating 15,300 m  |
| Electromagnetic compatibility | Meets EMC Directive (2004/108/EC), meets or exceeds IEC 61326-1:2005/EN 61326-1:2006 Group 1 Class A requirement<br>CISPR 11/EN 55011<br>IEC 61000-4-2/EN 61000-4-2<br>IEC 61000-4-3/EN 61000-4-3<br>IEC 61000-4-4/EN 61000-4-4<br>IEC 61000-4-5/EN 61000-4-5<br>IEC 61000-4-6/EN 61000-4-6<br>IEC 61000-4-11/EN 61000-4-11<br>Canada: ICES-001:2004<br>Australia/New Zealand: AS/NZS |
| Safety                        | UL61010-1 2nd edition, CAN/CSA22.2 No. 61010-1-04   |
| Dimensions                    | 381 mm (15 in) W x 204 mm (8 in) H x 142 mm (5.6 in) D  |
| Weight                        | Net: 3.9 kg (8.5 lbs), shipping: 4.1 kg (9.0 lbs)   |

#### Nonvolatile storage

|                                 |  |
|---------------------------------|--|
| Reference waveform display      | 2 internal waveforms or USB thumb drive  |
| Waveform storage                | Set up, .bmp, .png, .csv, ASCII, XY, reference waveforms, .alb, .bin, lister, mask, HDF5 |
| Max USB flash drive size        | Supports industry standard flash drives  |
| Set ups without USB flash drive | 10 internal setups   |
| Set ups with USB flash drive    | Limited by size of USB drive   |

#### Included standard with oscilloscope

|  |  |
|--|--|
| Standard 5-year warranty*  |  |
| Standard secure erase  |  |
| Standard Probe   |  |
| N2862B 150 MHz 10:1 passive probe  | Standard one per channel for 70 and 100 MHz models |
| N2863B 300 MHz, 10:1 passive probe   | Standard one per channel for 200 MHz models        |
| N6459-60001 8-channel logic probe and accessory kit  | Standard on MSO models or with DSOX2MSO upgrade    |
| <b>Built-in help language support</b> for English, Japanese, simplified Chinese, traditional Chinese, Korean, German, French, Spanish, Russian, Portuguese and Italian, Certificate of Calibration, Documentation CD |  |
| <b>Interface language support GUI menus:</b> English, Japanese, simplified Chinese, traditional Chinese, Korean, German, French, Spanish, Russian, Portuguese, Thai, Polish and Italian                              |  |
| Localized power cord   |  |


\*Applies to all orders on or after 1/1/2013.

For MET/CAL procedures, click on the Cal Labs solutions link below [Cal Labs Solutions](http://www.callabsolutions.com/MetCALandCLS.asp)  
<http://www.callabsolutions.com/MetCALandCLS.asp>

These procedures are FREE to customers.

# Oscilloscopes redefined: Breakthrough technology delivers more scope for the same budget

## License-only bandwidth upgrades and measurement applications

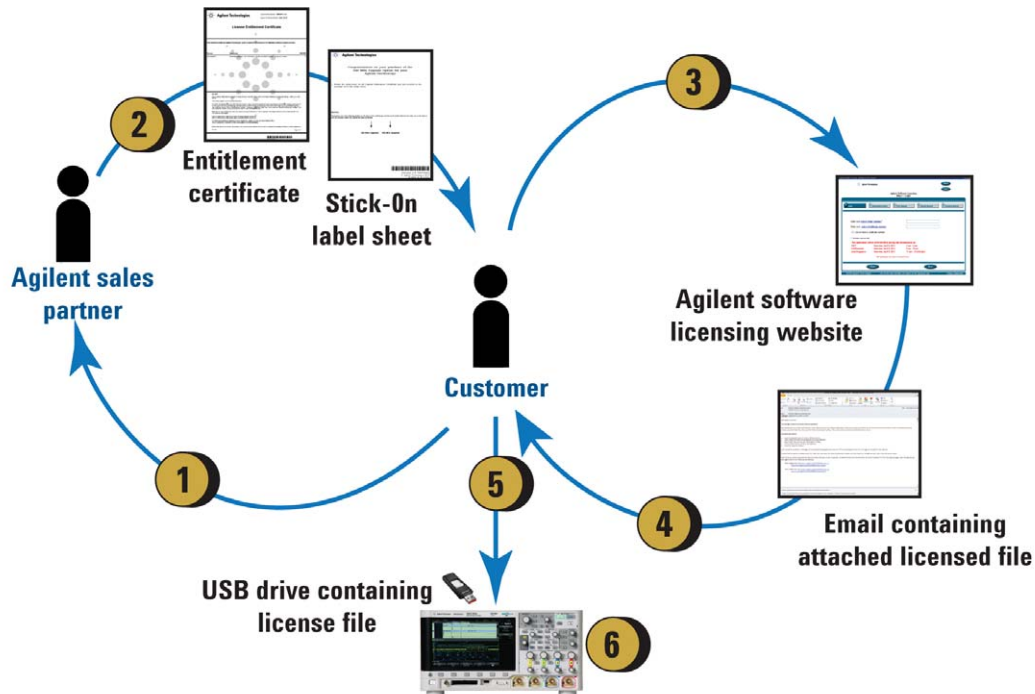


| Bandwidth upgrade models |  |
|--------------------------|--|
| <b>2000 X-Series</b>     |  |
| DSOX2BW12                | 70 MHz to 100 MHz, 2 ch, License only  |
| DSOX2BW14                | 70 MHz to 100 MHz, 4 ch, License only  |
| DSOX2BW22                | 100 MHz to 200 MHz, 2 ch, License only |
| DSOX2BW24                | 100 MHz to 200 MHz, 4 ch, License only |

| Measurement applications |   |
|--------------------------|---|
| DSOX2MEMUP               | Upgrade to 1 Mpts per channel                                   |
| DSOX2COMP                | Computer serial triggering and analysis (RS232/422/485/UART)    |
| DSOX2AUTO                | Automotive serial triggering and analysis (CAN, LIN)            |
| DSOX2EMBD                | Embedded serial triggering and analysis (I <sup>2</sup> C, SPI) |
| DSOX2WAVEGEN             | WaveGen (built-in function generator)                           |
| DSOXDVM                  | Integrated digital voltmeter                                    |
| DSOXEDK                  | Educator's kit  |
| DSOX2MASK                | Mask testing  |
| DSOX2SGM                 | Segmented memory  |
| DSOX2MSO                 | Upgrade to 8 digital timing channels                            |

### Process description

- 1 Place order for a license only bandwidth upgrade or measurement application product to an Agilent sales partner. If multiple bandwidth upgrade steps are needed, order all the corresponding upgrade products required to get from current bandwidth to desired bandwidth. In the case where the new bandwidth requires higher bandwidth passive probes, they are included with the upgrade. For the DSOX2BW22 and DSOX2BW24, the N2863B 10:1 300 MHz passive probes (1 per channel) will be sent with the upgrade.
- 2 Receive a paper or electronic .pdf Entitlement Certificate document for any of the orderable measurement applications. For bandwidth upgrades only, you receive a stick-on label document indicating upgraded bandwidth specification.
- 3 Use Entitlement Certificate or electronic .pdf document containing instructions and certificate number needed to generate a license file for a particular 2000 or 3000 X-Series oscilloscope model number and serial number unit.
- 4 Receive the licensed file and installation instructions via email.
- 5 Copy license file (.lic extension) from email to a USB drive and follow instructions in email to install the purchased bandwidth upgrade or measurement application on the oscilloscope.
- 6 For bandwidth upgrades only, attach bandwidth upgraded stick-on labels to front and rear panels of the oscilloscope. Model number and serial number of the oscilloscope do not change.

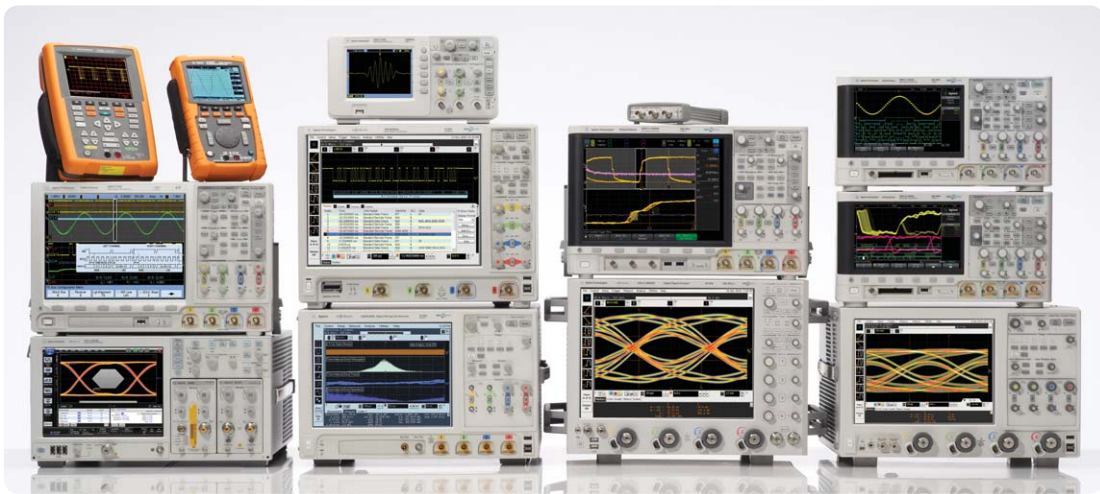

## Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications



**myAgilent**

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



[www.axiestandard.org](http://www.axiestandard.org)

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



[www.pxisa.org](http://www.pxisa.org)

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



**Three-Year Warranty\***

[www.agilent.com/find/ThreeYearWarranty](http://www.agilent.com/find/ThreeYearWarranty)

Agilent's combination of product reliability and three-year warranty coverage is another way we help you achieve your business goals: increased confidence in uptime, reduced cost of ownership and greater convenience.

*\* InfiniiVision 2000 X-Series oscilloscopes bought on or after January 1, 2013, have a 5-year warranty.*



**Agilent Advantage Services**

[www.agilent.com/find/AdvantageServices](http://www.agilent.com/find/AdvantageServices)

Accurate measurements throughout the life of your instruments.



[www.agilent.com/quality](http://www.agilent.com/quality)

[www.agilent.com](http://www.agilent.com)

[www.agilent.com/find/2000X-Series](http://www.agilent.com/find/2000X-Series)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

|               |                |
|---------------|----------------|
| Canada        | (877) 894 4414 |
| Brazil        | (11) 4197 3600 |
| Mexico        | 01800 5064 800 |
| United States | (800) 829 4444 |

### Asia Pacific

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 375 8100  |

### Europe & Middle East

|                |                                  |
|----------------|----------------------------------|
| Belgium        | 32 (0) 2 404 93 40               |
| Denmark        | 45 45 80 12 15                   |
| Finland        | 358 (0) 10 855 2100              |
| France         | 0825 010 700*<br>*0.125 €/minute |
| Germany        | 49 (0) 7031 464 6333             |
| Ireland        | 1890 924 204                     |
| Israel         | 972-3-9288-504/544               |
| Italy          | 39 02 92 60 8484                 |
| Netherlands    | 31 (0) 20 547 2111               |
| Spain          | 34 (91) 631 3300                 |
| Sweden         | 0200-88 22 55                    |
| United Kingdom | 44 (0) 118 927 6201              |

*For other unlisted countries:*

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

*(BP2-19-13)*

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012, 2013  
Published in USA, March 27, 2013  
5990-6618EN



**Agilent Technologies**