

# Agilent 87415A Microwave Amplifier

## Technical Overview



## 2 to 8 GHz

### Features and Description

- 25 dB gain
- 23 dBm output power
- GaAs MMIC reliability >1 x 10E6 hours MTBF
- Compact size, integral bias regulation

The Agilent Technologies 87415A microwave system amplifier brings compact, reliable gain block performance to systems integrators and microwave designers. With 25 dB minimum gain and over 23 dBm output power from 2 to 8 GHz, this amplifier offers output power where it is needed: at the test port. The 87415A offers internal bias regulation and GaAs MMIC reliability, and the 87415A adds integral heat sinking, bias port cabling, and stand-alone packaging for use in test system applications.



## Packaging

These two gain blocks differ primarily in level of integration. The 87415A amplifier features a complete stand-alone solution for test system designers and integrators with internal GaAs MMIC devices. An integral heat sink keeps the package at a temperature comfortable to the touch, enhancing its use as a benchtop amplifier, and a DC bias port allows easy connection to an external power supply such as the 87421A.

## 87415A Microwave System Amplifier

### Specifications

Specifications describe the instrument's warranted performance over the temperature range 20 °C to 30 °C (unless otherwise noted). All specifications apply after the instrument's temperature has been stabilized after one hour continuous operation.

Supplemental characteristics are intended to provide information useful in applying the instrument by giving typical but nonwarranted performance parameters. These are denoted as "typical," "nominal," or "approximate." Supplemental characteristics apply over the temperature range 20 °C to +30 °C.

<b>Frequency Range</b>	2 to 8 GHz
<b>Small Signal Gain</b>	25 dB minimum
<b>Small Signal Gain Flatness</b>	± 3 dB maximum
<b>Output Power at 1 dB Compression Point</b>	23 dBm minimum
<b>Input SWR</b>	2:1
<b>Output SWR</b>	3.6, 2 to 2.5 GHz 3, 2.5 to 8 GHz
<b>Harmonics</b>	-20 dBc at Pout = +23 dBm

### General Specifications

<b>Power Requirements</b>	+12 V dc nominal (+11 to +13 V dc);
<b>Bias Voltage and Current</b>	900mA
<b>Weight</b>	Weight Net 0.64 kg (1.41 lb) Shipping 1.32 kg (2.9 lb)
<b>RF Connectors</b>	SMA (f) on RF input and output

## Applications

The 87415A's compact size makes it an ideal remote amplifier for use by microwave test system integrators. It is a complete, off-the-shelf gain block that enables the system designer to place system power where it is needed, without consuming valuable rack space. Typical applications include microwave test sets and interface matrixes.

### Loss compensation

Compensate for systematic power losses from switching and signal routing ATE systems, frequency conversion, and long microwave cable paths. Use the 87415A microwave system amplifier to recover lost signal strength at test cable ends.

### Preamp

As a preamp, the 87415A can increase spectrum analyzer and frequency counter sensitivity.

### Benchtop amplifier for the RF and microwave designer

The 87415A microwave system amplifier gives the microwave engineer 30 dB gain and 23 dBm output power without consuming valuable bench or rack space. Other applications include antenna subsystems and production test systems.



*Agilent 87421A Power Supply*

### Separate Power Supply

The Agilent 87421A power supply provides the dc power needed to bias the 87415A. The power supply is housed in a small separate package, allowing it to be placed up to two meters away from the amplifier.

### Electrostatic Discharge Caution

Electrostatic discharge (ESD) can damage or destroy electronic components. It is recommended that these amplifiers, like other electronic components be installed and operated at a static-free workstation or in an environment where precautions against ESD have been implemented.

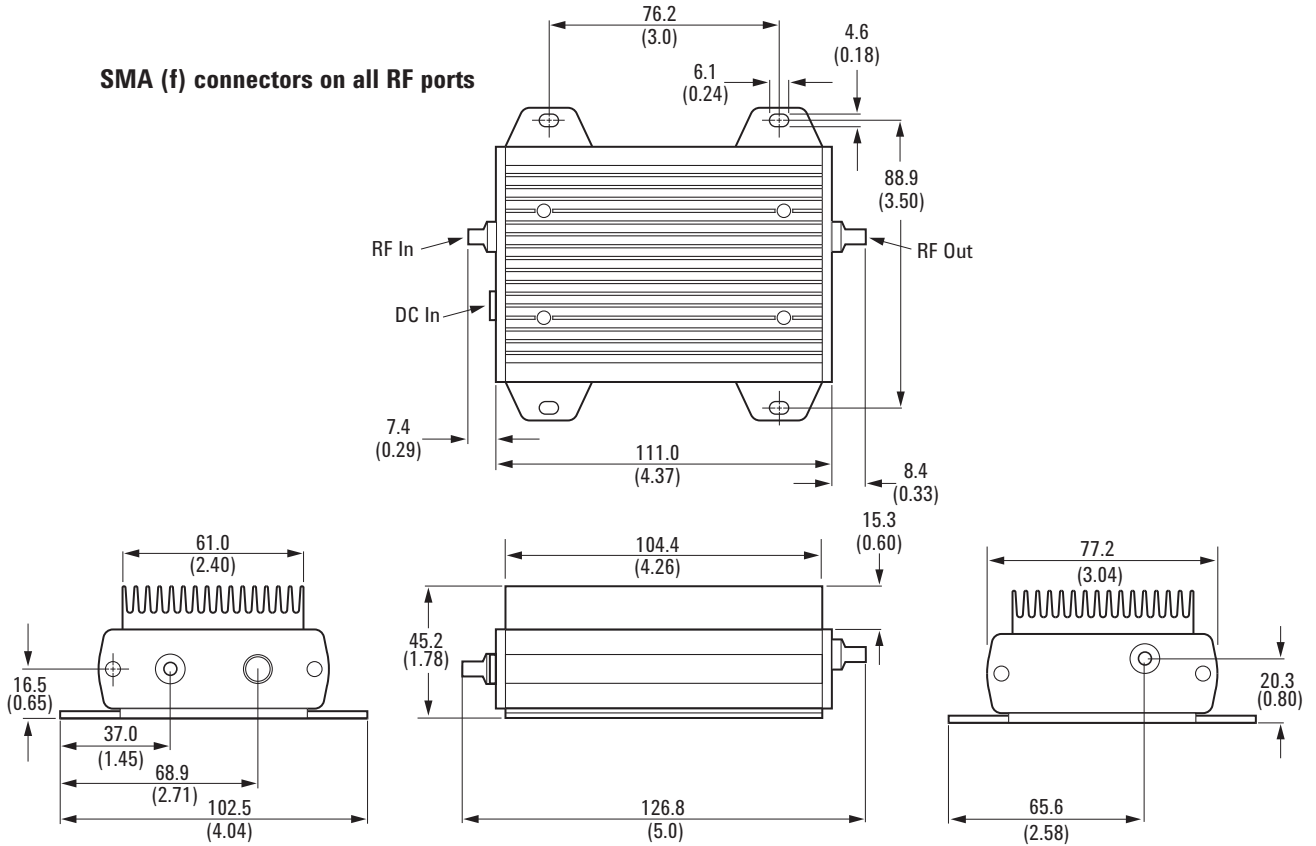


Figure 1. Agilent 87415A outline drawing. Dimensions in millimeters and (inches).

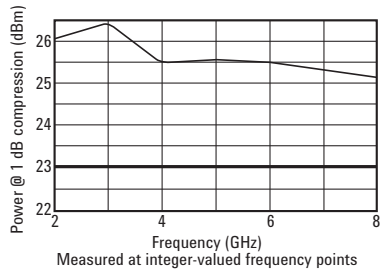


Figure 2. Power Output vs. Frequency

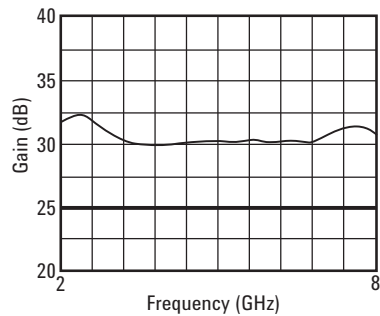


Figure 3. Gain vs. Frequency

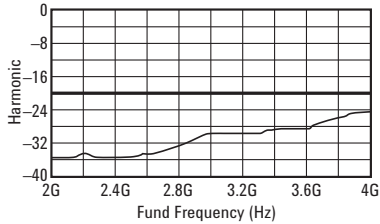


Figure 4. Harmonics vs. Frequency

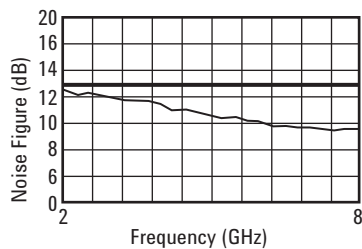


Figure 5. Noise Figure vs. Frequency

### Typical Performance Data

Saturated Power Level:	+26 dBm
Input Power Survival Level:	+23 dBm
Noise Figure:	13 dB
Non-Harmonically Related Spurious:	-50 dBc
Third Order Intercept (TOI):	+34 dBm
Impedance:	50 ohms
Reverse Isolation: ( $S_{12}$ )	60 dB
Power Dissipation:	10 W

### Environmental Specifications

Operating Temperature:	0 to +55 °C
Storage Temperature:	-40 to +70 °C

### Other Environmental Information

Temperature Coefficient of Gain:	0.1 dB/°C
Temperature Coefficient of 1 dBc:	0.045 dB/°C
Random Vibration:	5.2 G(rms) 50 to 2000 Hz per Mil-Std-883C method 2026 test condition IIA
Shock:	1500 G (peak), 0.5 ms per Mil-Std-883C method 2002.3 test condition B
Altitude (non-operating):	15,000 m per Mil-Std-883C method 1001 test condition C
EMC:	Radiated Interference is within the requirements of VDE 0871 and CISPR Publication 11

## Ordering Information

### 87415A Microwave System Amplifier

Includes amplifier and Agilent part number 83006-60004, which is a two meter cable with a 3-pin connector on one end and three wire leads on the other end.

## Other Instruments and Accessories

### 87421A Power Supply

Includes power supply and Agilent part number 83006-60005, which is a two meter cable with a 3-pin connector on one end and a D-subminiature connector on the other end.

### 87300B Coaxial Directional Coupler

#### **8471E 0.01 to 12 GHz Coaxial Detector 83006-60004 dc Bias Cable**

For use with user supplied power; consists of a two meter long shielded cable with a three pin connector on one end and three wire leads on the other end. Included with the 87415A microwave system amplifier.

#### 83006-60005 dc Bias Cable

For use with 87421A power supply; consists of a two meter long shielded cable with a 3-pin connector on one end and a D-subminiature connector on the other end. Included with the 87421A power supply.

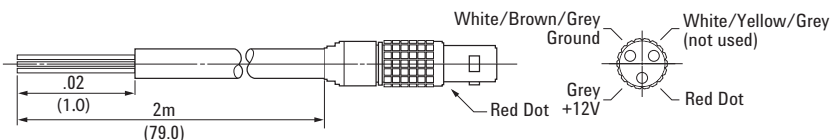


Figure 6. 83006-60004 DC Bias Cable. Dimensions in meters and (inches).



**www.agilent.com/find/myagilent**  
A personalized view into the information most relevant to you.

### Agilent Channel Partners

**www.agilent.com/find/channelpartners**  
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



**www.agilent.com/find/ThreeYearWarranty**  
Agilent's combination of product reliability and three-year warranty coverage is another way we help you achieve your business goals: increased confidence in uptime, reduced cost of ownership and greater convenience.



**www.agilent.com/find/AdvantageServices**  
Accurate measurements throughout the life of your instruments.



**www.agilent.com/quality**

**www.agilent.com**  
**www.agilent.com/find/mta**

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

#### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

#### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

*For other unlisted countries:*  
[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)  
*(BP-3-1-13)*

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2013  
Published in USA, March 13, 2013  
5091-1358E



**Agilent Technologies**