

**Agilent M9381A  
PXIe Vector  
Signal Generator**  
1 MHz to 3 GHz or 6 GHz



Data Sheet

**World's Fastest RF PXIe Source with *fastune***



*Challenge the Boundaries of Test  
Agilent Modular Products*

*Anticipate — Accelerate — Achieve*



**Agilent Technologies**

# OVERVIEW

## Break the Speed Barrier

Effective testing of today's complex products requires a balanced mix of time, coverage and cost-per-DUT. Success starts with the right combination of speed and accuracy in your test system. The M9381A is the modular signal generator you've been asking for—one that provides Agilent quality and performance in the PXI form factor. It accelerates throughput by delivering new levels of speed in signal generation with *fasttune*, an exclusive baseband tuning technology innovation, the fastest RF switching, versatile list mode and more. Add the M9381A to your system—and break the speed barrier.

## Product Description

The M9381A PXIe vector signal generator is a compact modular solution that provides frequency coverage from 1 MHz to 3.0 GHz or 6.0 GHz. A typical M9381A configuration includes four individual PXIe modules—M9311A digital vector modulator, M9310A source output, M9301A synthesizer and the M9300A frequency reference—designed for fast data interfaces and high-speed automated test systems. Instrument control is provided through a soft front panel and programmatic interfaces tuned to your application development environment of choice.



Agilent *fasttune* is an electrical power and radio frequency (RF) switching functionality that uses digital baseband power level changes and frequency offsets, while maintaining amplitude and phase calibrated accuracy, in order to provide the speed and accuracy needed to reduce the cost of test in modern communication manufacturing.

## Applications

- Cellular picocell and femtocell test
- Handset component test
- Military component test
- Public safety and homeland security radio test
- Wireless device test
- Wireless transceiver design validation
- WLAN production test

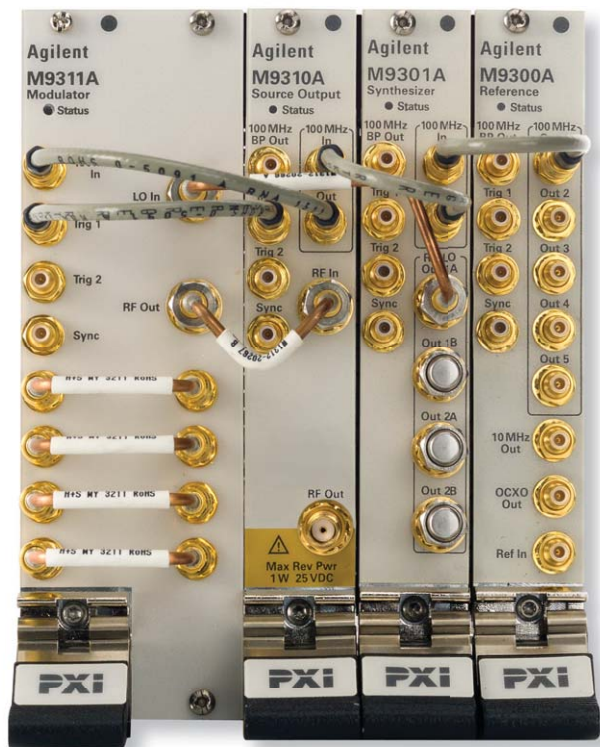


Figure 1. M9381A PXIe vector signal generator with four modules consisting of the M9311A digital vector modulator, M9310A source output, M9301A synthesizer and the M9300A frequency reference.



# OVERVIEW

## Product Features

- Frequency coverage from 1 MHz to 3.0 GHz or 6.0 GHz.
- 10  $\mu$ s switching speed with *fasttune*.
  - Set the RF frequency to the center of the band being tested and then program the baseband frequency offset to any value within the modulation bandwidth (e.g.,  $\pm 80$  MHz with 160 MHz bandwidth).
  - Set the RF power level to the maximum required for all tests and then set baseband power offset from 0 to 20 dB below RF level.
- Fast RF switching speed:
  - 225  $\mu$ s for frequency and amplitude changes.
  - 140  $\mu$ s for amplitude-only changes.
- Output power of +18 dBm across the frequency range.
- Better than  $\pm 0.4$  dB absolute amplitude accuracy.
- RF modulation bandwidth up to 160 MHz, with  $< \pm 0.3$  dB RF I/Q channel flatness.
- AM, FM, phase, pulse and multitone modulation.
- Arbitrary waveform memory up to 1024 MSa.
- Supported Signal Studio software: W-CDMA/HSPA+, cdma2000/1xEV-DO, GSM/EDGE/Evo, LTE/LTE-Advanced FDD, LTE/LTE-Advanced TDD, TD-SCDMA/HSDPA, WLAN 802.11a/b/g/n/ac, Bluetooth, Broadcast radio, Digital video, Mobile WiMax and GNSS.
- License key upgrades for all performance options: frequency range, output power, fast switching, generation bandwidth and memory.
- Chassis slot compatibility: PXIe slot.

## Uncompromising Values

- Accelerates test throughput with the industry's fastest RF frequency and amplitude switching speeds and 3201 list mode points.
- Reduces test time with *fasttune* that allows you to switch amplitude and frequency in  $< 10$   $\mu$ s.
- Ready to test wideband components with optional 160 MHz RF bandwidth.
- Keeps costs manageable—purchase what you need today and easily upgrade later using license-key upgrades without returning your modules to Agilent.
- Reduces development time and simplifies integration into existing test environments with multiple drivers and programmatic interfaces.
- Reduces startup time with Agilent IO libraries for easy configuration, one-step software install, and integrated instrument level VSG soft front panel.
- Fast repair turnaround time with Calibrated Core Exchange strategy.



Figure 2. M9381A baseband power and frequency offset tuning in  $< 10$   $\mu$ s as shown by the 89600 VSA software.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

## Block Diagram

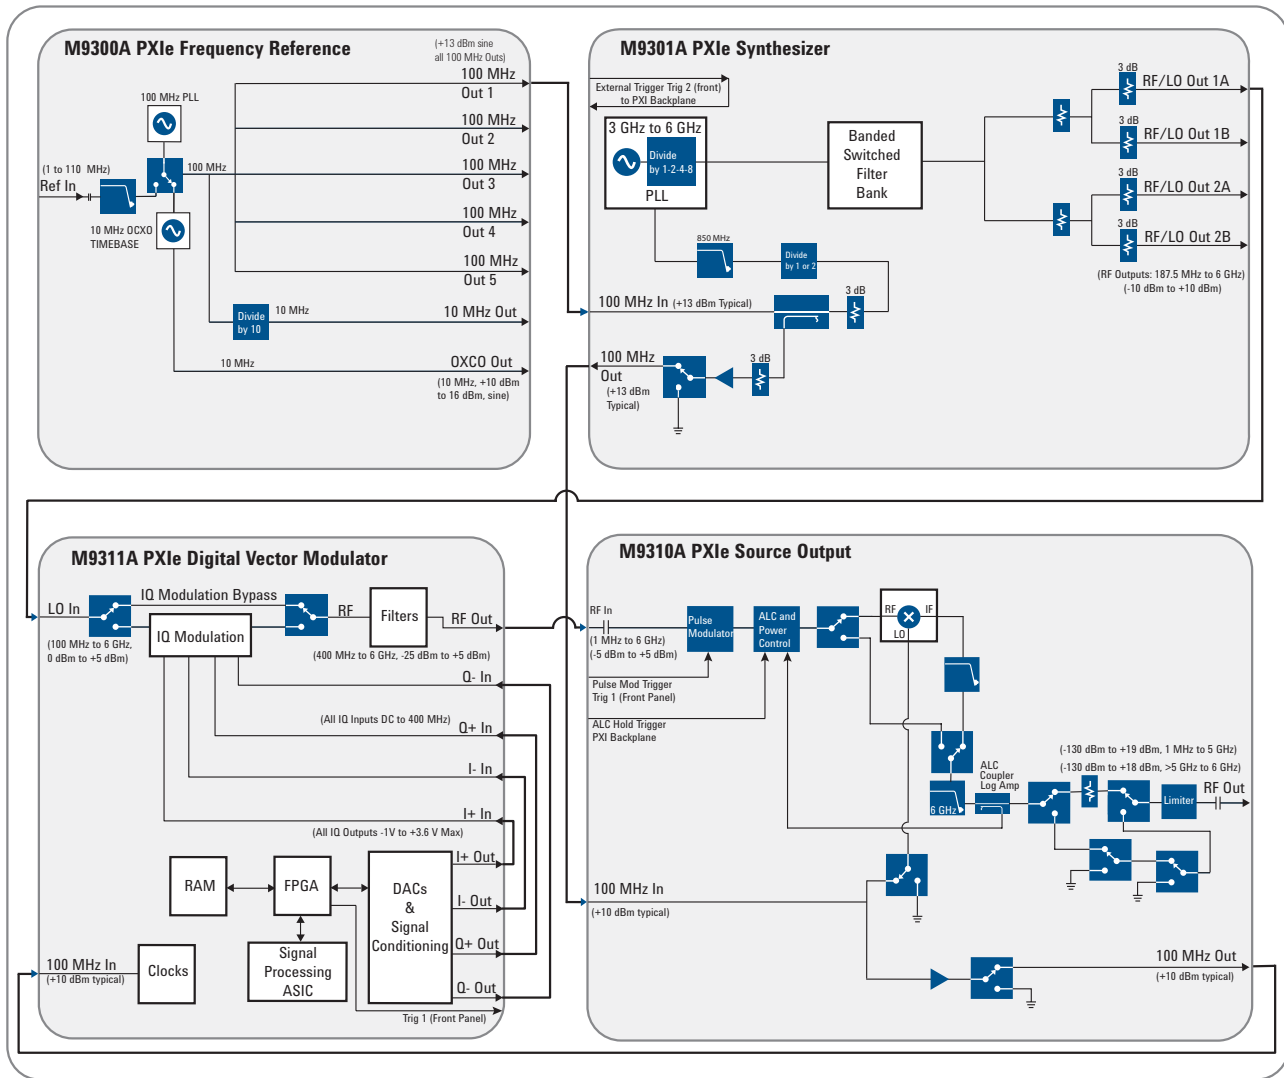


Figure 5. M9381A PXIe vector signal generator block diagram with four modules consisting of the M9301A synthesizer, M9310A source output, M9311A digital vector modulator and the optional M9300A frequency reference.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

## Definitions for Specifications

**Temperatures referred to in this document are defined as follows:**

- Operating ambient temperature = 0 to 55 °C, and individual module temperature of ≤ 75 °C.
- Room temperature = 20 to 30 °C, and individual module temperature of ≤ 55 °C.

**Specifications** describe the warranted performance of calibrated instruments. Data represented in this document are specifications unless otherwise noted under the following conditions.

- Calibrated instruments have been stored for a minimum of 2 hours within the operating ambient temperature range
- 30 minute warm-up time
- Calibration cycle maintained
- When used with Agilent M9300A frequency reference

**Characteristics** describe product performance that is useful in the application of the product, but that is not covered by the product warranty. Characteristics are often referred to as *Typical* or *Nominal* values and are italicized.

- **Typical** describes characteristic performance, which 80% of instruments will meet when operated at room temperature.
- **Nominal** describes representative performance that is useful in the application of the product when operated at room temperature.

## Recommended Best Practices in Use

- Use slot blockers and EMC filler panels in empty module slots to ensure proper operating temperatures. Agilent chassis and slot blockers optimize module temperature performance and reliability of test.
- At operating ambient temperatures above 45 °C, chassis fan should be set to high.

## Additional Information

- All graphs contain measured data from one unit and is representative of product performance at room temperature unless otherwise noted.
- The specifications contained in this document are subject to change.
- Specifications use the normal PLL mode setting, unless otherwise stated. Narrow loop bandwidth refers to specifications using the best wide offset PLL mode setting AGM938X\_VAL\_SYNTHESIZER\_PLL\_MODE\_BEST\_WIDE\_OFFSET, available in the M938x Vector Signal Generator/CW Source Instrument Drivers versions 1.2.300 and later.

### Guide For Specifications Related to Older Equipment or Older Version of Instrument Driver Software

**For M9310A Source Output manufacturing ID numbers xx5236xxxx and lower, please refer to:**

Specification Table	Page #
Maximum Output Power	20
Absolute Level Accuracy in CW Mode [ALC On]	20

**For M9311A Digital Vector Modulator manufacturing ID numbers xx5236xxxx and lower, please refer to:**

Residual Carrier Leakage	20
I/Q Image Suppression	20
WLAN 802.11 Performance Data	21

**Narrow Loop Bandwidth is not available in M938x Vector Signal Generator/CW Source Instrument Drivers version 1.1.199.3 and earlier. For Normal Loop Bandwidth specifications, please refer to:**

3GPP W-CDMA Performance Data	21
GSM/EDGE Performance Data	21
WLAN 802.11 Performance Data	21

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

## FREQUENCY

Frequency Range	
Option F03	1 MHz to 3 GHz
Option F06	1 MHz to 6 GHz
Resolution	0.01 Hz

Frequency Switching Speed	Normal Loop Bandwidth			Narrow Loop Bandwidth	
	Standard	Option UNZ	Option UNZ, typical	Option UNZ	Option UNZ, typical
List mode switching speed <sup>1</sup>					
Baseband frequency offset change <sup>2</sup>	≤ 5 ms	≤ 10 μs, nominal		≤ 10 μs, nominal	
<b>ALC off <sup>3</sup></b>					
Arbitrary frequency change	≤ 5 ms	≤ 225 μs	≤ 205 μs	≤ 285 μs	≤ 240 μs
Frequency change < 100 MHz within a band <sup>4</sup>	≤ 5 ms	≤ 155 μs	≤ 115 μs	≤ 165 μs	≤ 120 μs
<b>ALC on <sup>3</sup></b>					
Arbitrary frequency change	≤ 5 ms	≤ 380 μs	≤ 360 μs	≤ 380 μs	≤ 360 μs
Frequency change < 100 MHz within a band <sup>4</sup>	≤ 5 ms	≤ 285 μs	≤ 270 μs	≤ 285 μs	≤ 270 μs
<b>Non list mode switching speed <sup>5</sup></b>					
Baseband frequency offset change <sup>2</sup>	≤ 5 ms, nominal	≤ 250 μs, nominal		≤ 250 μs, nominal	
Arbitrary frequency change	≤ 5 ms, nominal	≤ 2 ms, nominal		≤ 2.1 ms, nominal	

List Mode	
List mode channel parameters	80 parameters including RF frequency, power, modulation arb and baseband, ALC, power search, triggers
Dwell time	0 seconds to 429 seconds
Number of points	1 to 3201
Triggering	Immediate, external, software, timer

Frequency Reference (M9300A PXIe Frequency Reference Module)	
Reference Outputs	
<b>100 MHz Out (Out 1 through Out 5)</b>	
Amplitude	≥ 10 dBm      13 dBm, typical
Connectors	5 SMB snap-on
Impedance	50 Ω, nominal

1. Time from trigger input to frequency and amplitude settled within limits given below with digital modulation on and channel corrections enabled. Specifications are for amplitudes lower than +17 dBm and using an M9036A embedded controller in an M9018A chassis.
2. Baseband offset frequency settled within 100 Hz. Baseband offset can be adjusted ± from carrier frequency within limits determined by RF modulation bandwidth. Synthesizer frequency and amplitude are not changing and ALC off.
3. Carrier frequency settled within 1 ppm or 1 kHz, whichever is greater, and amplitude settled within 0.2 dB (at room temperature) or within 0.5 dB (at the operating ambient temperature range). If the ALC is off and if amplitudes in the list exceed +10 dBm, specification applies for amplitude settled within 0.4 dB above 3 GHz at room temperature, for M9310A modules with manufacturing ID prefix xx5236xxxx and lower.. For frequency changes ≥ 1.6 GHz at carriers ≥ 3.2 GHz nominal frequency settling time within ±0.05% of final frequency is 125 us. Simultaneous carrier frequency and amplitude switching.
4. Frequency bands: One (1 MHz to 400 MHz); Two (> 400 MHz to < 750 MHz); Three (≥ 750 MHz to < 1500 MHz); Four (≥ 1500 MHz to < 3000 MHz); Five (≥ 3000 MHz to 6000 MHz).
5. Mean time from IVI command to carrier frequency settled within 1 PPM or 1 kHz whichever is greater and amplitude settled within 0.2 dB. Simultaneous carrier frequency and amplitude switching.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

Reference Outputs (continued)	
<b>10 MHz Out</b>	
Amplitude	<i>9.5 dBm, nominal</i>
Connectors	1 SMB snap-on
Impedance	<i>50 Ω, nominal</i>
<b>OCXO Out</b>	
Amplitude	<i>11.5 dBm, nominal</i>
Connectors	1 SMB snap-on
Impedance	<i>50 Ω, nominal</i>

Frequency Accuracy
Same as accuracy of internal time base or external reference input

Internal Timebase	
Accuracy	$\pm [(time\ since\ last\ adjustment \times aging\ rate) \pm temperature\ effects \pm calibration\ accuracy]$
<b>Frequency Stability</b>	
Aging rate	
Daily	<i>&lt; ± .5 ppb/day, after 72 hour warm-up</i>
Yearly	<i>&lt; ± .10 ppm/year, after 72 hours warm-up</i>
Total 10 years	<i>&lt; ± 0.6 ppm/10yrs, after 72 hours warm-up</i>
Achievable initial calibration accuracy (at time of shipment)	$\pm 5 \times 10^{-8}$
Temperature effects	
20 to 30 °C	<i>&lt; ± 10 ppb</i>
Full temperature range	<i>&lt; ± 50 ppb</i>
Warm up	
5 minutes over +20 to +30 °C, with respect to 1 hour	<i>&lt; ± 0.1 ppm</i>
15 minutes over +20 to +30 °C, with respect to 1 hour	<i>&lt; ± 0.01 ppm</i>

External Reference Input	
Frequency	1 MHz to 110 MHz, sine wave
Lock range	$\pm 1\ ppm, nominal$
Amplitude	<i>0 to 10 dBm, nominal</i>
Connector	1 SMB snap-on
Impedance	<i>50 Ω, nominal</i>

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

## AMPLITUDE

Output Parameters		
Settable range	Standard	Option 1EA
	+10.7 to -130 dBm	+20 to -130 dBm
Resolution		
ALC On <sup>6</sup>	0.02 dB, nominal	
I/Q mode, ALC Off <sup>7</sup>	0.02 dB, nominal	
I/Q mode, ALC Off, baseband offset change	0.001 dB, nominal	
CW mode, ALC Off	0.3 dB, nominal	

Maximum Output Power <sup>8</sup>		
Frequency	Standard	Option 1EA
1 MHz to 5 GHz	+10 dBm	+19 dBm
> 5 GHz to 6 GHz	+10 dBm	+18 dBm

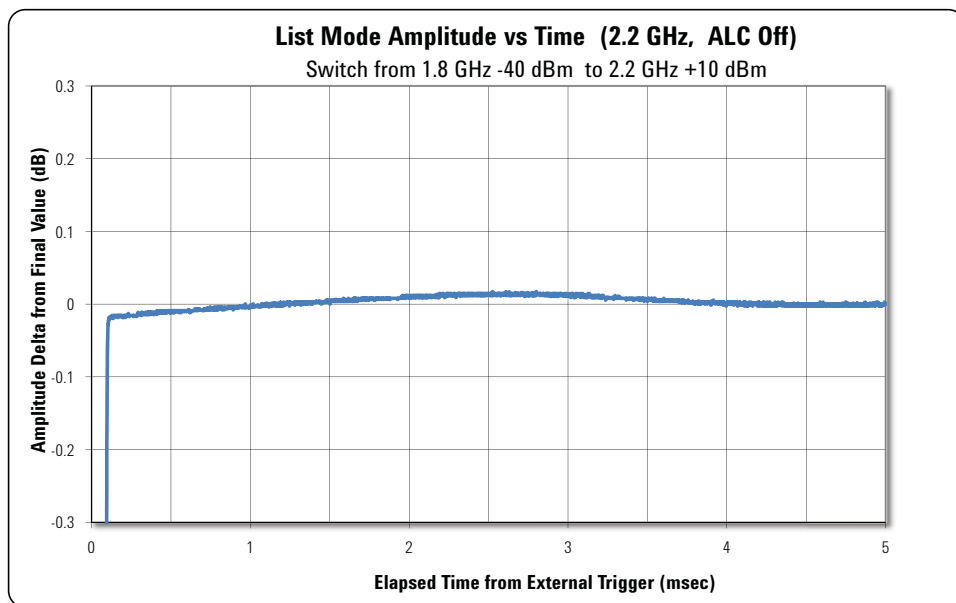


Figure 6. List mode amplitude vs time showing fast settling time to specified level accuracy.

6. Settable to 0.01 dB.

7. After a power search.

8. For M9310A modules with manufacturing ID prefix xx5236xxx and lower, please refer to archived specifications at back of this document.



# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

Amplitude Switching Speed			
List mode switching speed <sup>9</sup>	Standard	Option UNZ	Option UNZ, typical
Baseband power level change <sup>10</sup>	≤ 5 ms	≤ 10 μs, nominal	
ALC off <sup>11</sup>	≤ 5 ms	≤ 140 μs	≤ 100 μs
ALC on	≤ 5 ms	≤ 165 μs	≤ 120 μs
Non list mode switching speed <sup>12</sup>			
Baseband power level change <sup>10</sup>	≤ 5 ms, nominal	≤ 250 μs, nominal	
Arbitrary power level change	≤ 5 ms, nominal	≤ 1.5 ms, nominal	

## List Mode

See frequency specification section for more detail

Absolute Level Accuracy in CW Mode [ALC on] <sup>12</sup>				
Frequency	< Max Power to -20 dBm	< -20 to -110 dBm	< -110 to -120 dBm	< -120 to -130 dBm
1 MHz to 3 GHz	±0.4 dB ±0.15 dB, typical	±0.5 dB ±0.15 dB, typical	±0.7 dB ±0.25 dB, typical	±0.8 dB, nominal
> 3 GHz to 6 GHz	±0.5 dB ±0.15 dB, typical	±0.6 dB ±0.25 dB, typical	±1.0 dB ±0.5 dB, typical	±0.8 dB, nominal

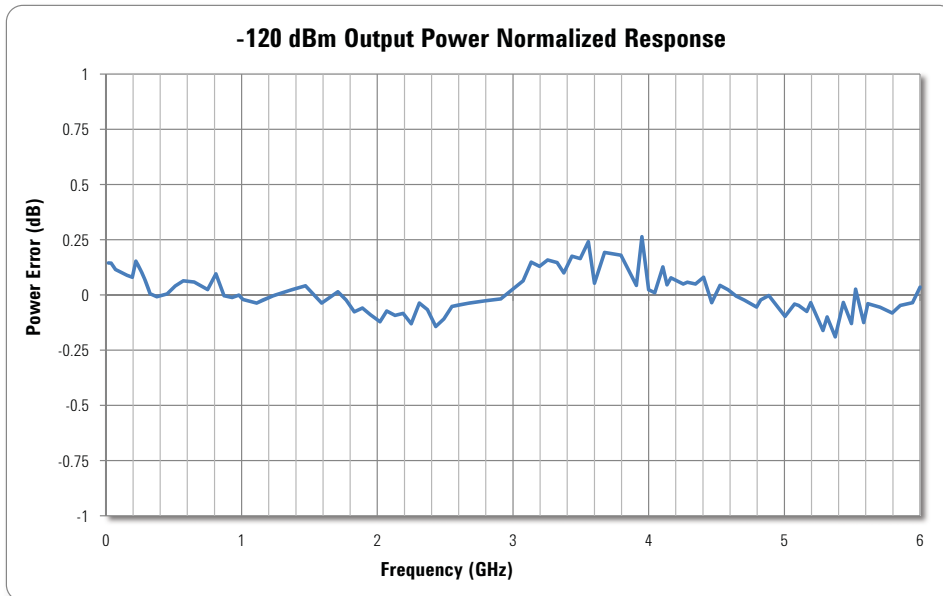


Figure 7. Output power normalized response at -120 dBm.

9. Time from trigger input to amplitude settled within 0.2 dB (at room temperature) or within 0.5 dB (at the operating ambient temperature range). Carrier frequency is not changing. Measurements made with the M9036A embedded controller in an M9018A chassis.
10. Baseband offset amplitude settled within 0.2 dB. Baseband offset can be adjusted from 0 dB to -20 dB.
11. If the ALC is off and if amplitudes in the list exceed +10 dBm, specification applies for amplitude settled within 0.4 dB above 3 GHz at room temperature, for M9310A modules with manufacturing ID prefix xx5236xxxx and lower.
12. Mean time from IIVI command to amplitude settled within 0.2 dB. Carrier frequency is not changing.
13. Specifications apply at room temperature. For temperatures outside this range, absolute level accuracy degrades by ± 0.02 dB/°C. For M9310A modules with manufacturing ID prefix xx5236xxxx and lower, please refer to archived specifications at back of this document.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

Absolute level accuracy (ALC off, relative to ALC on) <sup>14</sup>	
<b>Frequency</b>	
1 MHz to 5 GHz	$\pm 0.25$ dB, typical
> 5 GHz to 6 GHz	$\pm 0.62$ dB, typical
<b>Power search <sup>15</sup></b>	
Time	< 20 ms, nominal
Absolute level accuracy in digital I/Q mode (ALC on, relative to CW) <sup>16</sup>	
$\leq 15$ dBm	$\pm 0.7$ dB ( $\pm 0.25$ dB, nominal)
$\leq 10$ dBm	$\pm 0.2$ dB
$\leq 0$ dBm	$\pm 0.1$ dB

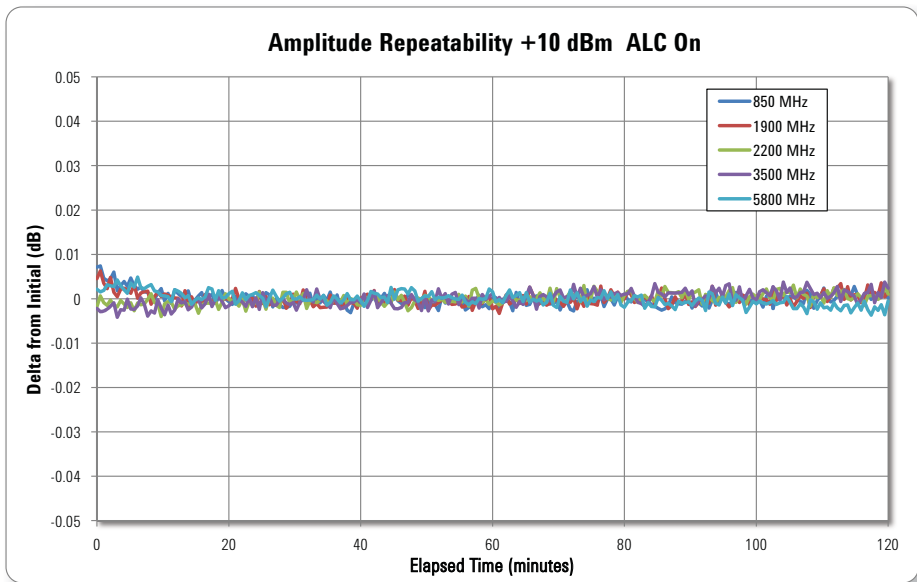


Figure 8. Amplitude repeatability at various carrier frequencies. Repeatability measures the ability of the instrument to return to a given power setting after a random excursion to any other frequency and power setting. It should not be confused with absolute level accuracy.

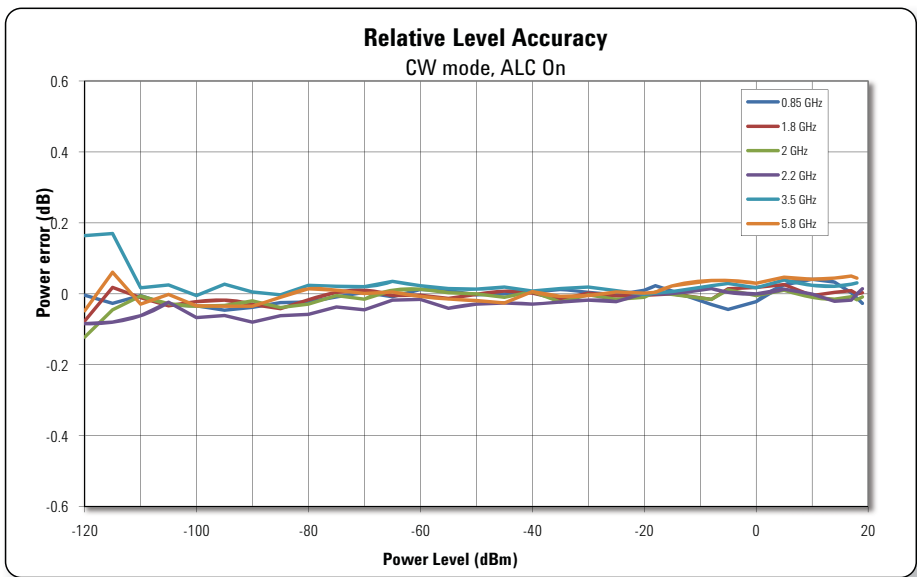


Figure 9. Relative level accuracy at various carrier frequencies.

14. After a power search, with a single side-band signal and with power search blanking on.

15. Power search is an internal alignment routine that improves level accuracy with ALC off.

16. QPSK waveform 4 MS/s symbol rate. Specifications apply at room temperature.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

VSWR	
1 MHz to 6 GHz	< 1.5:1, nominal
Maximum Reverse Power	
1 MHz to 6 GHz	1 W, nominal
Max DC voltage	25 VDC, nominal

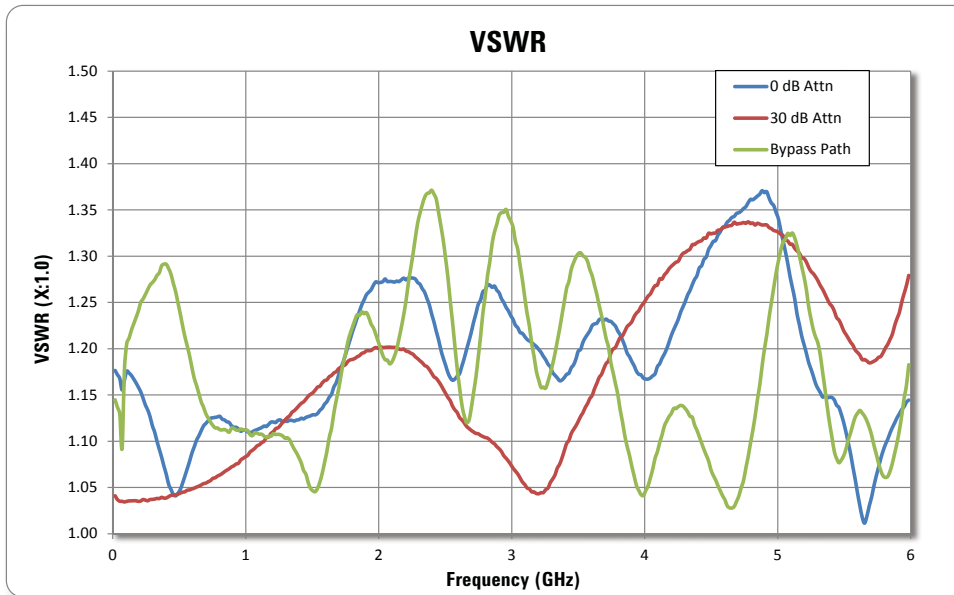


Figure 10. Measured VSWR from 1 MHz to 6 GHz.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

## SPECTRAL PURITY

Phase Noise at 20 kHz Offset	Normal Loop Bandwidth
1 GHz	-122 dBc/Hz, typical
2 GHz	-117 dBc/Hz, typical
3 GHz	-112 dBc/Hz, typical
6 GHz	-108 dBc/Hz, typical

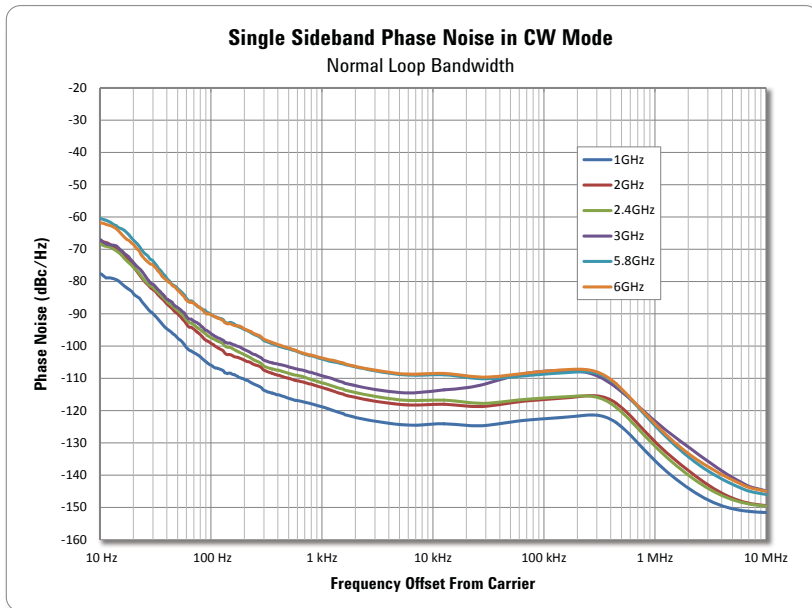


Figure 11. Single sideband phase noise in normal loop bandwidth, CW mode from 10 Hz to 10 MHz, offset at 1, 2, 2.4, 3, 5.8 and 6 GHz.

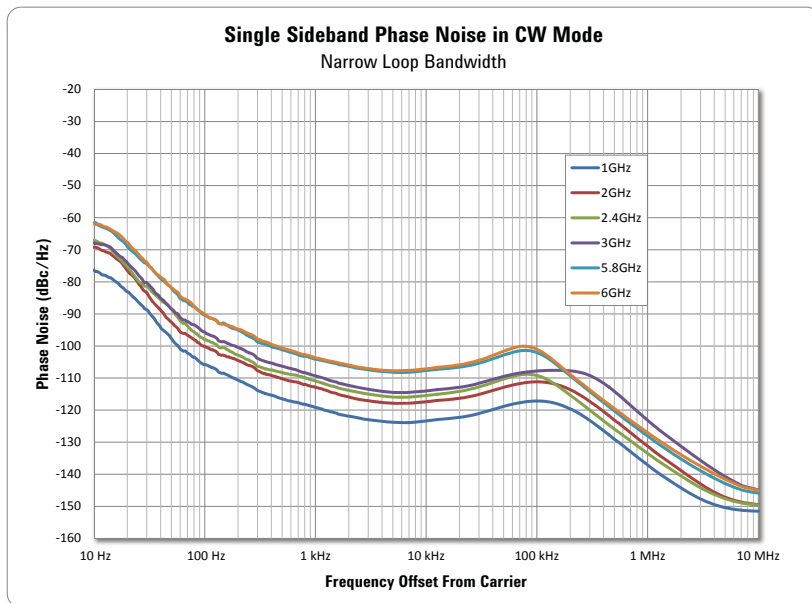


Figure 12. Single sideband phase noise in narrow loop bandwidth, CW mode from 10 Hz to 10 MHz, offset at 1, 2, 2.4, 3, 5.8 and 6 GHz.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

Broadband noise floor				
Range				
1 MHz to 6 GHz	< -140 dBc/Hz, nominal, at +10 dBm output power level			
Harmonics				
Range	≤ 0 dBm	≤ 0 dBm	≤ +10 dBm	≤ +10 dBm
1 MHz to < 1 GHz	< -39 dBc	-43 dBc, typical	< -35 dBc	-37 dBc, typical
1 GHz to 2.5 GHz	< -34 dBc	-38 dBc, typical	< -32 dBc	-34 dBc, typical
> 2.5 GHz	< -35 dBc	-38 dBc, typical	< -30 dBc	-32 dBc, typical
Nonharmonics <sup>17</sup>				
Nonharmonic miscellaneous spurious <sup>18</sup>	< -70 dBc, nominal			
Nonharmonic HET band mixing spurs (0 dBm)	< -67 dBc, nominal			
Nonharmonic Frac-N	< -66 dBc, nominal			
Subharmonics				
1 MHz to 6 GHz	none			

## ANALOG MODULATION

Pulse Parameters	
Pulse on/off ratio 1 MHz to 400 MHz	> 85 dB, typical
Pulse on/off ratio > 400 MHz to 6 GHz	> 95 dB, typical
Pulse on/off ratio with I/Q modulation	> 140 dB, nominal
Pulse rise/fall time	< 10 ns, nominal

Frequency Modulation (Option UNT) <sup>19</sup>	
Maximum deviation	1.25 MHz
Resolution of deviation	0.1 Hz
Maximum rate	5 MHz

Phase Modulation (Option UNT) <sup>19</sup>	
Maximum deviation	10 radians
Resolution of deviation	0.001 radians
Maximum rate	5 MHz

Amplitude Modulation (Option UNT) <sup>19</sup>	
Maximum depth	100%
Resolution of depth	0.001%
Maximum rate	6.25 MHz

Pulse (Option UNT) <sup>19</sup>	
Rate	1 Hz to 1 MHz
Pulse on time	200 ns to 2 ms

Multitone (Option UNT) <sup>19</sup>	
Rate (tone separation)	100 Hz to 1 MHz
Number of tones	2 to 16

17. Non-harmonics include mixing spurs for frequencies below 400 MHz, synthesizer spurs, and other miscellaneous chassis and power supply products, for offsets >10 kHz.

18. With Agilent M9036A embedded controller.

19. With arbitrary waveforms. Sine, dual-sine, triangle, ramp and square waveforms supported.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

## VECTOR MODULATION

Residual Carrier Leakage <sup>20</sup>		
Frequency	Specifications	Typical
1 MHz to 5 GHz	< -55 dBc	< -62 dBc
> 5 GHz to 6 GHz	< -51 dBc	< -58 dBc

I/Q Image Suppression <sup>20</sup>		
Frequency	Specifications	Typical
1 MHz to 850 MHz	< -46 dBc	< -57 dBc
> 850 MHz to 5 GHz	< -54 dBc	< -62 dBc
> 5 GHz to 6 GHz	< -48 dBc	< -58 dBc

I/Q Baseband Feed-Through <sup>20</sup>	
Frequency	Specifications
1 MHz to 400 MHz	< -65 dBc, typical
> 400 MHz to 3 GHz	< -80 dBc, typical
> 3 GHz	< -90 dBc, typical

RF Modulation Bandwidth with Internal ARB	
Option B04 (standard)	40 MHz
Option B10	100 MHz
Option B16	160 MHz

RF I/Q Channel Flatness		
Bandwidth	1 MHz to 5.5 GHz	> 5.5 GHz to 6 GHz
40 MHz BW (Option B04 standard)	< $\pm 0.1$ dB, typical	< $\pm 0.2$ dB, typical
100 MHz BW (Option B10)	< $\pm 0.2$ dB, typical	< $\pm 0.3$ dB, typical
160 MHz BW (Option B16)	< $\pm 0.3$ dB, typical	< $\pm 0.5$ dB, typical

<sup>20</sup> Measured with an SSB waveform with an I/Q scale factor of 0.25 for offsets  $\leq 50$  MHz, after executing IQ alignment. Specifications apply at 625 kHz and 50 MHz offsets. For residual carrier leakage and I/Q image suppression specifications for M9311A modules with manufacturing ID prefix xx5236xxx and lower, please refer to archived specifications at the back of this document.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

Corrected Phase Error		
Bandwidth	1 GHz	3 GHz
40 MHz BW (Option B04 standard)	$\pm 0.25^\circ$ , nominal	$\pm 1.25^\circ$ , nominal
100 MHz BW (Option B10)	$\pm 0.65^\circ$ , nominal	$\pm 2.5^\circ$ , nominal
160 MHz BW (Option B16)	$\pm 0.9^\circ$ , nominal	$\pm 3.0^\circ$ , nominal

Arbitrary Waveform Memory Maximum Playback Capacity	
Option M01 (standard)	32 MSa
Option M05	512 MSa
Option M10	1024 MSa

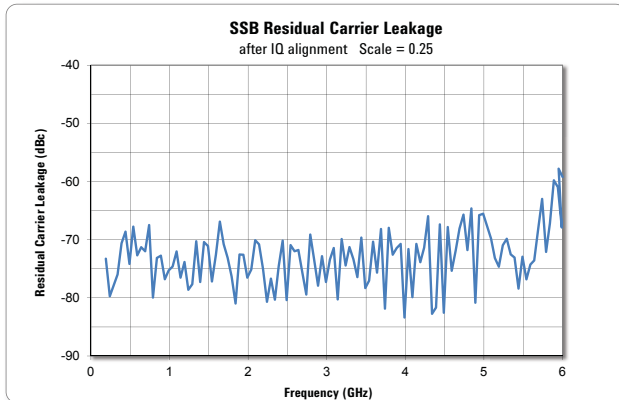


Figure 13. SSB Residual carrier leakage.

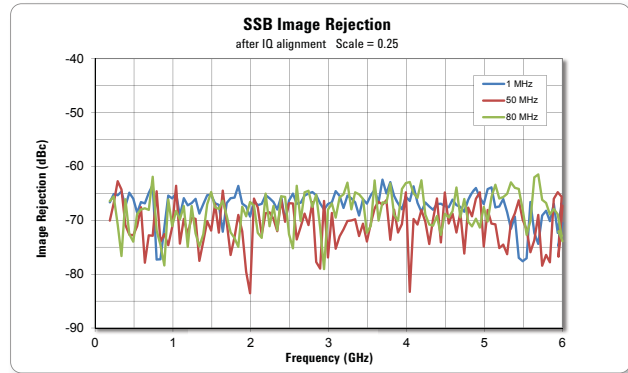


Figure 14. SSB image rejection at 1, 50, and 80 MHz offsets.

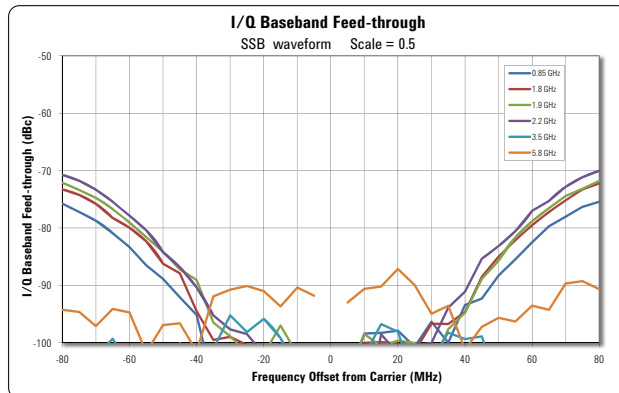


Figure 15. I/Q Baseband feed-through at various carrier frequencies.

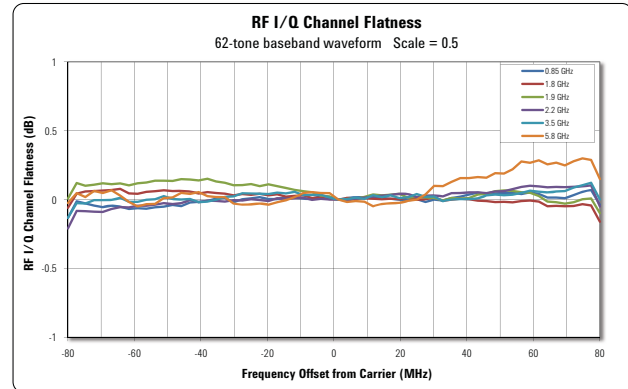


Figure 16. RF I/Q channel flatness at various carrier frequencies.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

3GPP W-CDMA Performance Data <sup>21</sup>						
Modulation type	QPSK					
EVM (2 GHz, 1 DPCH, ≤ 5 dBm)	0.57% rms, typical					
Channel distortion <sup>22</sup>						
Offset	Power Level		0 dBm	0 dBm	5 dBm	5 dBm
	Configuration	Frequency	spec (dBc)	typical (dBc)	spec (dBc)	typical (dBc)
Adjacent 5 MHz	1 DPCH 1 carrier	900 MHz	-70	-72	-71	-72
Alternate 10 MHz			-71	-73	-72	-74
Adjacent 5 MHz		1800 to 2200 MHz	-70	-72	-70	-71
Alternate 10 MHz			-71	-73	-72	-73
Adjacent 5 MHz	64 DPCH 1 carrier	900 MHz	-69	-71	-69	-72
Alternate 10 MHz			-71	-72	-71	-73
Adjacent 5 MHz		1800 to 2200 MHz	-68	-70	-68	-70
Alternate 10 MHz			-70	-72	-71	-73

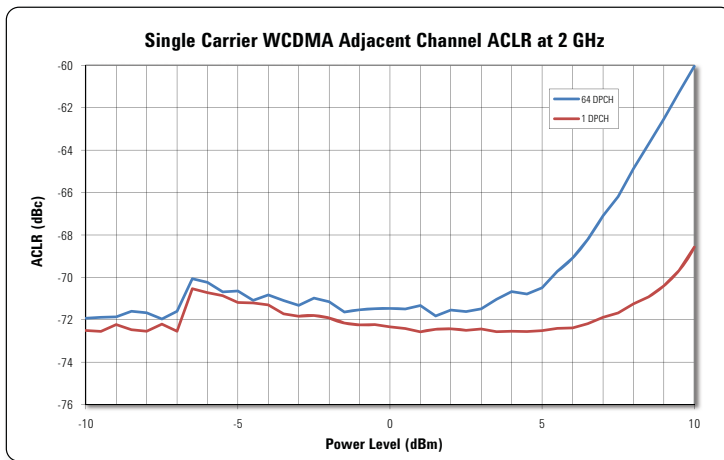


Figure 17. Single carrier W-CDMA adjacent channel ACLR versus power level at 2 GHz.

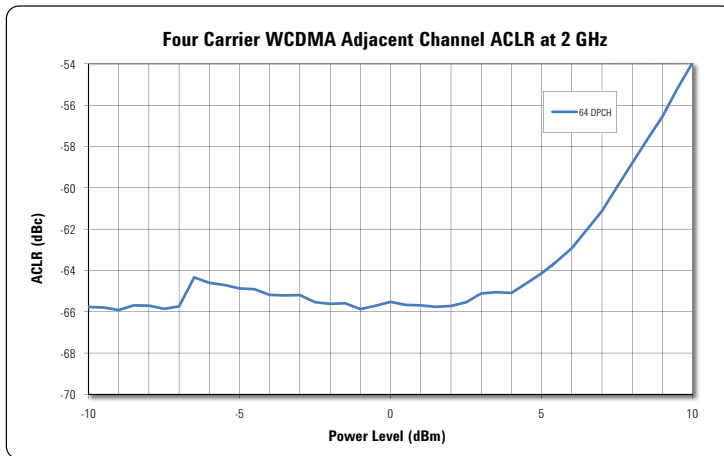


Figure 18. Four carrier W-CDMA adjacent channel ACLR versus power level at 2 GHz.

21. W-CDMA characteristics apply at 900 MHz and between 1.8 to 2.2 GHz, 3.84 Mcps rate, within 5 °C of IQ alignment.  
 22. Specifications apply at room temperature.



# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

GSM/EDGE Performance Data <sup>23</sup>						
	GSM		EDGE			
Modulation Type	GMSK bursted		3pi/8-8PSK bursted			
Modulation Rate	270.833 ksp/s		70.833 ksp/s			
EVM [ALC Off]	± 0.15 ° rms global phase error, typical		0.3%, typical			
EVM [ALC On]	± 0.15 ° rms, global phase error, typical		0.6%, typical			
Output RF spectrum (ORFS)	Narrow loop bandwidth <sup>25</sup>		Narrow loop bandwidth <sup>25</sup>			
<b>Offset</b>	<b>GSM, typical</b>		<b>EDGE, typical</b>			
200 kHz	-37 dBc		-39 dBc			
400 kHz	-66 dBc		-66 dBc			
600 kHz	-71 dBc		-71 dBc			
800 kHz	-76 dBc		-76 dBc			
1200 kHz	-81 dBc		-81 dBc			
1800 kHz	-80 dBc		-79 dBc			
WLAN 802.11 Performance Data <sup>24</sup>			Narrow Loop Bandwidth <sup>25</sup>			
Preamble Only						
Power Level	-7 dBm		0 dBm		+5 dBm	
	Typical	Nominal	Typical	Nominal	Typical	Nominal
802.11n, 20 MHz, 64 QAM						
2.4 GHz	-52.5 dB	-53.2 dB	-52.7 dB	-53.4 dB	-51.3 dB	-52.1 dB
5.8 GHz	-44.6 dB	-45.8 dB	-45.2 dB	-45.8 dB	-41.3 dB	-42.8 dB
802.11n, 40 MHz, 64 QAM						
2.4 GHz	-48.5 dB	-49.5 dB	-48.6 dB	-49.7 dB	-47.8 dB	-49.2 dB
5.8 GHz	-44.1 dB	-44.5 dB	-44.1 dB	-44.7 dB	-40.1 dB	-41.7 dB
802.11ac, 80 MHz, 256 QAM						
5.8 GHz	-42.2 dB	-45.6 dB	-42.8 dB	-46.1 dB	-40.6 dB	-47.8 dB
802.11ac, 160 MHz, 256 QAM						
5.8 GHz	-42.5 dB	-43.7 dB	-42.7 dB	-44.1 dB	-39.8 dB	-40.6 dB
Preamble, Pilots & Data						
Power Level	-7 dBm		0 dBm		+5 dBm	
	Nominal		Nominal		Nominal	
802.11n, 20 MHz, 64 QAM						
2.4 GHz	-54.4 dB		-54.7 dB		-54.5 dB	
5.8 GHz	-46.5 dB		-46.9 dB		-43.7 dB	
802.11n, 40 MHz, 64 QAM						
2.4 GHz	-52.8 dB		-53.3 dB		-52.9 dB	
5.8 GHz	-47.2 dB		-47.6 dB		-44.0 dB	
802.11ac, 80 MHz, 256 QAM						
5.8 GHz	-48.7 dB		-48.9 dB		-45.2 dB	
802.11ac, 160 MHz, 256 QAM						
5.8 GHz	-47.2 dB		-47.8 dB		-43.9 dB	

23. GSM/EDGE characteristics apply 800 MHz to 900 MHz, and 1800 MHz to 1900 MHz, with 1 timeslot channel configuration, within ± 5 °C of IQ alignment.

24. For M9311A modules with manufacturing ID prefix xx5236xxxx and below, please refer to archived specifications at the back of this document.

25. Narrow loop bandwidth is not available in M938x Vector Signal Generator/CW Source Instrument Drivers version 1.1.199.3 and earlier. For normal loop bandwidth specifications, please refer to the archived specifications at the back of this document.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

LTE FDD Performance Data <sup>26</sup>		
Modulation Type	64 QAM	
EVM		
EVM (900 MHz, ≤ +6 dBm)	- 52 dB (0.25%), nominal	
EVM (2 GHz, ≤ +6 dBm)	- 50 dB (0.32%), nominal	
ACPR		
<b>Frequency</b>	<b>Adjacent (&lt; 5 dBm)</b>	<b>Alternate (&lt; 5 dBm)</b>
900 MHz	-68 dBc, nominal	-70 dBc, nominal
2 GHz	-67 dBc, nominal	-70 dBc, nominal

Environmental and physical specifications				
Temperature	Operating	0 to 55 °C		
	Non-Operating (Storage)	-40 to +70 °C		
Humidity <sup>27</sup>		Type tested at 95%, +40 °C (non-condensing)		
Altitude		Up to 15,000 feet (4,572 meters)		
Connectors	RF OUT	SMA female		
EMC		Complies with European EMC Directive 2004/108/EC • IEC/EN 61326-2-1 • CISPR Pub 11 Group 1, class A • AS/NZS CISPR 11 • ICES/NMB-001 This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme a la norme NMB-001 du Canada.		
Warm-up time		30 minutes		
Size	M9300A	1 PXIe slot		
	M9301A	1 PXIe slot		
	M9310A	1 PXIe slot		
	M9311A	2 PXIe slots		
Dimensions	<b>Module</b>	<b>Length</b>	<b>Width</b>	<b>Height</b>
	M9300A	210 mm	22 mm	130 mm
	M9301A	210 mm	22 mm	130 mm
	M9310A	210 mm	22 mm	130 mm
	M9311A	210 mm	42 mm	130 mm
Weight	M9300A	0.551 kg (1.215 lbs)		
	M9301A	0.535 kg (1.179 lbs)		
	M9310A	0.551 kg (1.215 lbs)		
	M9311A	0.901 kg (1.986 lbs)		
Power drawn from chassis	M9300A	≤ 18 W		
	M9301A	≤ 25 W		
	M9310A	≤ 28 W		
	M9311A	≤ 45 W		

26. LTE FDD E-TM 1.1 and E-TM 3.1, 10 MHz, 64 QAM PDSCH, full resource block. Characteristics apply with ± 5 °C of IQ alignment.

27. Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation and end-use--those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power-line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

System requirements		
Topic	Windows® 7 and Vista Requirements	Windows® XP Requirements
Operating systems	Windows 7 (32-bit and 64-bit) Windows Vista, SP1 and SP2 (32-bit and 64-bit)	Windows XP, Service Pack 3
Processor speed	1 GHz 32-bit (x86), 1 GHz 64-bit (x64) (no support for Itanium 64)	600 MHz or higher required 800 MHz recommended
Available memory	4 GB minimum 8 GB or greater recommended	3 GB minimum
Available disk space <sup>28</sup>	1.5 GB available hard disk space, includes: <ul style="list-style-type: none"> <li>• 1 GB available for Microsoft .NET Framework 3.5 SP1 <sup>29</sup></li> <li>• 100 MB for Agilent IO Libraries Suite</li> </ul>	1.5 GB available hard disk space, includes: <ul style="list-style-type: none"> <li>• 1 GB available for Microsoft .NET Framework 3.5 SP1 <sup>29</sup></li> <li>• 100 MB for Agilent IO Libraries Suite</li> </ul>
Video	Support for DirectX 9 graphics with 128 MB graphics memory recommended (Super VGA graphics is supported)	Super VGA (800 x 600) 256 colors or more
Browser	Microsoft® Internet Explorer 7.0 or greater	Microsoft® Internet Explorer 6.0 or greater
M938x Vector Signal Generator/CW Source Instrument Drivers		
Narrow loop bandwidth	Narrow loop bandwidth using the best wide offset PLL mode setting AGM938X_VAL_SYNTHESIZER_PLL_MODE_BEST_WIDE_OFFSET requires instrument drivers version 1.2.300.0 or later	



Figure 19. M9381A PXIe vector signal generator with four modules consisting of the M9311A digital vector modulator, M9310A source output, M9301A synthesizer and the M9300A frequency reference placed within the Agilent M9018A PXI chassis with the Agilent M9036A controller.

28. Because of the installation procedure, less disk space may be required for operation than is required for installation.

29. NET Framework Runtime Components are installed by default with Windows Vista and Windows 7. Therefore, you may not need this amount of available disk space.

# ARCHIVED SPECIFICATIONS

The following specifications apply to M9310A Source Output module manufacturing number prefixes xx5236xxxx and lower.

## Amplitude

Maximum Output Power					
Frequency	Standard	Option 1EA <sup>30</sup>			
1 MHz to 2.5 GHz	+10 dBm	+19 dBm			
>2.5 GHz to 6 GHz	+10 dBm	+18 dBm			

Absolute Level Accuracy in CW Mode (ALC on) <sup>31</sup>					
Frequency	<Max Power to -20 dBm	<-20 to -90 dBm	<-90 to -100 dBm	<-100 to -120 dBm	<-120 to -130 dBm
1MHz to 400 MHz	±0.5 dB ±0.2 dB, typical	±0.55 dB ±0.2 dB, typical	±0.62dB ±0.2 dB, typical	±0.85 dB ±0.3 dB, typical	±0.8 dB, nominal
> 400 MHz to 3 GHz	±0.4 dB ±0.2 dB, typical	±0.55 dB ±0.2 dB, typical	±0.62 dB ±0.2 dB, typical	±0.85 dB ±0.25 dB, typical	±0.8 dB, nominal
>3 GHz to 6 GHz	±0.5 dB ±0.2 dB, typical	±0.6 dB ±0.25 dB, typical	±0.65 dB ±0.25 dB, typical	±1.0 dB ±0.5 dB, typical	±0.8 dB, nominal


The following specifications apply to M9311A Digital Vector Modulator module manufacturing number prefixes xx5236xxxx and lower.

## Vector Modulation

Residual Carrier Leakage <sup>32</sup>		
Frequency	Specifications	Typical
1 MHz to 700 MHz	< -53 dBc	< -59 dBc
> 700 MHz to 4 GHz	< -55 dBc	< -62 dBc
> 4 GHz to 6 GHz	< -49 dBc	< -53 dBc

I/Q Image Suppression <sup>32</sup>		
Frequency	Specifications	Typical
1 MHz to 700 MHz	< -51 dBc	< -55 dBc
> 700 MHz to 850 MHz	< -46 dBc	< -57 dBc
> 850 MHz to 4 GHz	< -54 dBc	< -62 dBc
> 4 GHz to 5 GHz	< -49 dBc	< -54 dBc
> 5 GHz to 6 GHz	< -48 dBc	< -54 dBc

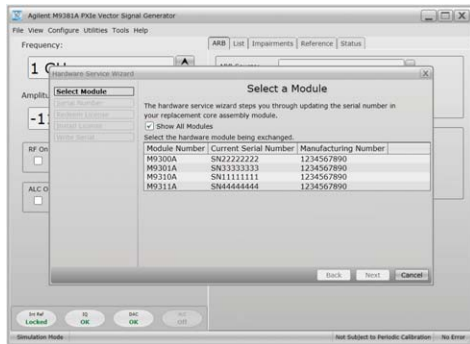

Manufacturing numbers can be found in the instrument's Soft Front Panel software under Utilities > Hardware Service Wizard, as shown at left. The same manufacturing number is shown on the left side of the module.

<sup>30</sup>. Specifications apply at room temperature.

<sup>31</sup>. Specifications apply at room temperature. For temperatures outside this range, absolute level accuracy degrades by ± 0.02 dB/C°.

<sup>32</sup>. Measured with an SSB waveform with an I/Q scale factor of 0.5 for offsets ≤ 50 MHz. Specifications apply at 625 kHz and 50 MHz offsets.

# ARCHIVED SPECIFICATIONS

The following specifications apply to M9311A Digital Vector Modulator module manufacturing number prefixes xx5236xxxx and lower.

## Vector Modulation (cont'd)

3GPP W-CDMA Performance Data <sup>33</sup> - Normal Loop Bandwidth						
Modulation Type	QPSK					
EVM (2GHz, 1 DPCH, ≤ 5 dBm)	0.57% rms, typical					
Channel Distortion <sup>34</sup> Offset	Power Level Configuration	Frequency	0 dBm spec	0 dBm typical	5 dBm spec	5 dBm typical
Adjacent 5 MHz	1 DPCH	900 MHz	-70 dBc	-71 dBc	-71 dBc	-72 dBc
Adjacent 10 MHz			-71 dBc	-73 dBc	-72 dBc	-74 dBc
Adjacent 5 MHz	1 carrier	1800 MHz to 2200 MHz	-70 dBc	-71 dBc	-70 dBc	-71 dBc
Adjacent 10 MHz			-71 dBc	-73 dBc	-72 dBc	-73 dBc
Adjacent 5 MHz	64 DPCH	900 MHz	-69 dBc	-70 dBc	-67 dBc	-69 dBc
Adjacent 10 MHz			-71 dBc	-72 dBc	-71 dBc	-73 dBc
Adjacent 5 MHz	1 carrier	1800 MHz to 2200 MHz	-68 dBc	-70 dBc	-67 dBc	-70 dBc
Adjacent 10 MHz			-70 dBc	-72 dBc	-71 dBc	-73 dBc
GSM/EDGE Performance Data <sup>35</sup> - Normal Loop Bandwidth						
	GSM			EDGE		
Modulation Type	GMSK bursted			3pi/8-8PSK bursted		
Modulation Rate	270.833 ksps			70.833 ksps		
EVM [ALC Off]	± 0.15 ° rms global phase error, typical			0.3%, typical		
EVM [ALC On]	± 0.15 ° rms global phase error, typical			0.6%, typical		
ORFS Offset	GSM, typical			EDGE, typical		
200 kHz	-36 dBc			-39 dBc		
400 kHz	-64 dBc			-64 dBc		
600 kHz	-68 dBc			-68 dBc		
800 kHz	-75 dBc			-75 dBc		
1200 kHz	-80 dBc			-80 dBc		
1800 kHz	-80 dBc			-79 dBc		
WLAN 802.11 Performance Data - Normal loop bandwidth						
Frequency	2.4 GHz			5.8 GHz		
Power Level	5 dBm EVM nominal	15 dBm EVM nominal	1 dBm EVM nominal	11 dBm EVM nominal		
802.11a/g, 20 MHz, 64 QAM	-49.6 dB	-39.4 dB	-44.0 dB	-34.2 dB		
802.11n, 40 MHz, 64 QAM	-47.8 dB	-40.4 dB	-43.0 dB	-33.3 dB		
802.11ac, 80 MHz, 64 QAM	-46.8 dB	-38.0 dB	-42.1 dB	-31.7 dB		
802.11ac, 80 MHz, 256 QAM	-46.1 dB	-38.6 dB	-42.1 dB	-32.3 dB		
802.11ac, 160 MHz, 64 QAM	-46.0 dB	-38.2 dB	-40.6 dB	-32.1 dB		

33. W-CDMA characteristics apply at 900 MHz and between 1.8 and 2.2 GHz, 3.84 Mcps rate, within 5 °C of IQ alignment.

34. Specifications apply at room temperature.

35. GSM/EDGE characteristics apply at 800 MHz to 900 MHz and 1800 MHz to 1900 MHz, with 1 timeslot channel configuration, within ± 5 °C of IQ alignment.

# SOFTWARE

Instrument Connection Software			
	Agilent IO Library	The Suite offers a single entry point for connection to the most common instruments including AXIe, PXI, GPIB, USB, Ethernet/LAN, RS-232, and VXI test instruments from Agilent and other vendors. It automatically discovers interfaces, chassis, and instruments. The graphical user interface allows you to search for, verify and update IVI instrument and soft front panel drivers for modular and traditional instruments. The Suite safely installs in side-by-side mode with NI I/O software.	Free software Download at <a href="http://www.agilent.com/find/iosuite">www.agilent.com/find/iosuite</a>
Module Setup and Usage			
	Agilent Soft Front Panel	The PXI module includes a Soft Front Panel (SFP), a software-based Graphical User Interface (GUI) which enables the instrument's capabilities from your PC.	Included on CD-ROM shipped with module or <a href="#">online</a>
Programming			
Driver		Development environments	
IVI-COM IVI-C LabVIEW MATLAB		Visual Studio® (VB.NET, C#, C/C++) VEE LabVIEW, LabWindows/CVI, MATLAB	Included on CD-ROM shipped with module or <a href="#">online</a>
Programming Assistance			
	Command Expert	Assists in finding the right instrument commands and setting correct parameters. A simple interface includes documentation, examples, syntax checking, command execution and debug tools to build sequences for integration in Excel, MATLAB, Visual Studio, LabVIEW, VEE, SystemVue.	Free software download at <a href="http://www.agilent.com/find/commandexpert">www.agilent.com/find/commandexpert</a>
Programming examples		Each module includes programming examples for Visual Studio.net, LabVIEW, MATLAB, LabWindows, and Agilent VEE Pro.	Included on CD-ROM shipped with module or online at <a href="http://www.agilent.com/find/m9381a">www.agilent.com/find/m9381a</a>
Signal Generation Software			
	Signal Studio	Suite of flexible, easy-to-use, signal creation tools that provides Agilent validated and performance optimized reference signals for commonly used communications standards. It configures signals in an easy-to-use, application-specific graphical interface and enables you to scale the capability and performance to meet your specific test needs.	Licensed software. For more information, visit <a href="http://www.agilent.com/find/signalstudio">www.agilent.com/find/signalstudio</a>
	SystemVue	System-level EDA software platform for designing communications and defense systems. Used with the M9381A, SystemVue bridges the gap between simulation and prototyping to reduce design iterations and accelerate deployment of emerging wireless technologies.	Licensed software. For more information, visit <a href="http://www.agilent.com/find/eesof-systemvue">www.agilent.com/find/eesof-systemvue</a>
	MATLAB	Interactive tools and command-line functions for instrument control and data analysis tasks such as signal processing, signal modulation, digital filtering.	Licensed software. For more information, visit <a href="http://www.agilent.com/find/matlab">www.agilent.com/find/matlab</a>

# SETUP AND CALIBRATION SERVICES

Assistance		
One day startup assistance	Gain access to a technical expert who will help you get started quickly with the M9381A VSG and its powerful software tools. The flexible instruction format is designed to get you to your first measurements and familiarize you with ways to adapt the equipment to a specific application.	Included in base configuration
Calibration and Traceability		
Factory Calibration	The M9381A VSG ships factory calibrated with an ISO-9002, NIST-traceable calibration certificate.	Included in base configuration
Calibration Cycle	A one year calibration cycle is recommended.	
Calibration Sites	<ul style="list-style-type: none"> <li>• At Agilent Worldwide Service Centers</li> <li>• On-site by Agilent</li> <li>• By self-maintainers</li> </ul>	For more information visit <a href="http://www.agilent.com/find/infoline">www.agilent.com/find/infoline</a>
R1282A Annual Calibration Service	<ul style="list-style-type: none"> <li>• Agilent Calibration</li> <li>• Agilent Calibration + Uncertainties</li> <li>• Agilent Calibration + Uncertainties + Guardbanding</li> <li>• Standards Compliance</li> <li>• ANSI Z540.3-2006, ISO 17025:2005, ANSI Z540-1-1994, ISO 9001:2008</li> </ul>	Additional service, not included in the warranty
N7800A Calibration and Adjustment Software	The M9381A VSG is supported by Agilent's Calibration and Adjustment Software. This is the same software used at Agilent Service Centers to automate calibration. The software offers compliance tests for ISO 17025:2005, ANSI/NCSL Z540.3-2006, and measurement uncertainty per ISO Guide to Expression of Measurement Uncertainty.	Licensed software. For more information, visit <a href="http://www.agilent.com/find/calibrationsoftware">www.agilent.com/find/calibrationsoftware</a>
Agilent Calibration Status Utility	The Agilent Calibration Status utility helps ensure your M9381A is calibrated by managing the calibration interval and providing messages regarding instrument and module calibration status.	Included in base configuration

## SUPPORT AND WARRANTY

Warranty		
Global warranty	<p>Agilent’s warranty service provides standard coverage for the country where product is used.</p> <ul style="list-style-type: none"> <li>• All parts and labor necessary to return to full specified performance</li> <li>• Recalibration for products supplied originally with a calibration certificate</li> <li>• Return shipment</li> </ul>	Included
R-51B-001-3C	Return to Agilent Warranty—3 Years 15 days typical turnaround repair service	Included
R-51B-001-5C	Return to Agilent Warranty—5 Years 15 days typical turnaround repair service	
R-51B-001-3X Express Warranty 3 years	The express warranty upgrades the global warranty to provide, for 3 years, a 5 day typical turnaround repair service in the US, Japan, China and many EU countries.	Optional
R-51B-001-5X Express Warranty 5 years	The express warranty upgrades the global warranty to provide, for 5 years, a 5 day typical turnaround repair service in the US, Japan, China and many EU countries.	Optional
Support		
Core Exchange Program	Agilent’s Replacement Core Exchange program allows fast and easy module repairs. A replacement core assembly is a fully functioning pre-calibrated module replacement that is updated with the defective module serial number, allowing the replacement module to retain the original serial number.	For qualified self-maintainers in US only
Self-Test Utility	A self-test utility runs a set of internal tests which verifies the health of the modules and reports their status.	Included in base configuration



# CONFIGURATION AND ORDERING INFORMATION

## Ordering Information

Model	Description
M9381A	PXIe Vector Signal Generator: 1 MHz to 3 or 6 GHz Includes: M9301A PXIe Synthesizer M9310A PXIe Source Output M9311A PXIe Digital Vector Modulator One day startup assistance Module interconnect cables Software, example programs and product information on CD Return to Agilent Warranty—3 Years

Base Configuration	
M9381A-F03	Frequency range: 1 MHz to 3 GHz
M9381A-B04	RF Modulation Bandwidth, 40 MHz
M9381A-M01	Memory, 32 MSa
M9381A-300 Required for warranted specifications	PXIe Frequency Reference: 10 MHz and 100 MHz Adds M9300A PXIe Frequency Reference: 10 MHz and 100 MHz (M9300A module can support multiple M9381A modular instruments)

Configurable Options	
<b>Frequency</b>	
M9381A-F03	Frequency range: 1 MHz to 3 GHz
✓ M9381A-F06	Frequency range: 1 MHz to 6 GHz
<b>Power</b>	
✓ M9381A-1EA	High Output Power
<b>Switching Speed</b>	
✓ M9381A-UNZ	Fast Switching
<b>Modulation Bandwidth</b>	
M9381A-B04	RF Modulation Bandwidth: 40 MHz
M9381A-B10	RF Modulation Bandwidth: 100 MHz
✓ M9381A-B16	RF Modulation Bandwidth: 160 MHz
<b>Memory</b>	
M9381A-M01	Memory, 32 MSa
M9381A-M05	Memory, 512 MSa
✓ M9381A-M10	Memory, 1024 MSa
<b>Other</b>	
✓ M9381A-UNT	Analog Modulation
M9381A-UK6	Commercial calibration certificate with test data for M9381A (M9301A, M9310A, M9311A)
M9300A-UK6	Commercial calibration certificate with test data for M9300A (module only)
<b>Related Products in Recommended Configuration</b>	
✓ M9036A	PXIe Embedded Controller
✓ M9018A	18-Slot PXIe Chassis
✓ <i>Recommended Configuration</i>	

# CONFIGURATION AND ORDERING INFORMATION

## Software Information

Supported operating systems	Microsoft Windows® XP (32-bit) Microsoft Windows® 7 (32/64-bit) Windows Vista®, SP1 and SP2 (32-bit and 64-bit)
Standard compliant drivers	IVI-COM, IVI-C, LabVIEW, MATLAB
Supported application development environments (ADE)	VisualStudio® (VB.NET, C#, C/C++), VEE, LabVIEW, LabWindows/CVI, MATLAB
Agilent IO Libraries (version 16.2 or newer)	Includes: VISA Libraries, Agilent Connection Expert, IO Monitor
Agilent Command Expert	Instrument control for SCPI or IVI-COM drivers
Signal Studio Software Connectivity:	N7600B W-CDMA/HSPA+ N7601B cdma2000/1xEV-DO N7602B GSM/EDGE/Evo N7606B Bluetooth N7609B Global Navigation Satellite System <i>(available May 2013)</i> N7611B Broadcast Radio N7612B TD-SCDMA/HSDPA N7615B Mobile WiMAX N7617B WLAN 802.11a/b/g/n/ac N7623B Digital Video N7624B LTE/LTE-Advanced FDD N7625B LTE/LTE-Advanced TDD
<ul style="list-style-type: none"> <li>▪ N76xxB-9TP connects to M9381A, transportable perpetual license.</li> <li>▪ N76xxB-9FP connects to M9381A, fixed perpetual license.</li> <li>▪ N7650B-2xx provides 5/50 waveform pack licenses.</li> </ul>	
(Playback on up to four channels per license)	
SystemVue Software Connectivity:	W1461 SystemVue Architect
Baseband Verification Libraries & Applications	W1918 LTE-Advanced W1910 LTE W1916 3G (GSM/EDGE/CDMA/cdma2000/W-CDMA/HSPA+) W1911 WiMAX 802.16e W1917 WLAN 802.11a/b/g/n/ac W1915 mmWave WPN 802.15.3c/802.11ad W1919 Global Navigation Satellite System W1914 DVB-x2 W1905 Radar W1716 Digital Predistortion Builder

## Accessories

Model	Description
Y1212A	Slot Blocker Kit: 5 modules
Y1213A	PXI EMC Filler Panel Kit: 5 slots
Y1214A	Air Inlet Kit: M9018A 18-slot chassis
Y1215A	Rack Mount Kit: M9018A 18-slot chassis

## Related Products

Model	Description
M9021A	PCIe Cable Interface
M9045B	PCIe ExpressCard Adaptor for laptop connectivity
Y1200B	PCIe Cable for laptop connectivity
M9048A	PCIe Desktop Adaptor for desktop connectivity
Y1202A	PCIe Cable for desktop connectivity
M9380A	PXIe CW Source
M9300A	PXIe Frequency Reference

## Advantage Services: Calibration and Warranty

Agilent Advantage Services is committed to your success throughout your equipment's lifetime

R-51B-001-5C	Return to Agilent Warranty - 5 years
R-51B-001-3X	Express Warranty - 3 years
R-51B-001-5X	Express Warranty - 5 years
N7800A	Calibration & Adjustment Software



## The Modular Tangram

The four-sided geometric symbol that appears in this document is called a tangram. The goal of this seven-piece puzzle is to create identifiable shapes—from simple to complex. As with a tangram, the possibilities may seem infinite as you begin to create a new test system. With a set of clearly defined elements—hardware, software—Agilent can help you create the system you need, from simple to complex.



*Challenge the Boundaries of Test  
Agilent Modular Products*



**3-Year Warranty**  
[www.agilent.com/find/threeyearwarranty](http://www.agilent.com/find/threeyearwarranty)



**myAgilent**  
[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

**PXI** [www.pxisa.org](http://www.pxisa.org)

### Agilent Solutions Partners

[www.agilent.com/find/solutionspartners](http://www.agilent.com/find/solutionspartners)

Agilent  
Advantage  
Services



Agilent Advantage Services is committed to your success throughout your equipment's lifetime.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



[www.agilent.com/quality](http://www.agilent.com/quality)

PICMG and the PICMG logo, CompactPCI and the CompactPCI logo, AdvancedTCA and the AdvancedTCA logo are US registered trademarks of the PCI Industrial Computers Manufacturers Group. "PCIe" and "PCI EXPRESS" are registered trademarks and/or service marks of PC-SIG. Microsoft, Windows, Visual Studio, Visual C++, Visual C#, and Visual Basic are either registered trademark or trademarks of Microsoft Corporation in the United States and/or other countries.

[www.agilent.com](http://www.agilent.com)

[www.agilent.com/find/modular](http://www.agilent.com/find/modular)

[www.agilent.com/find/m9381a](http://www.agilent.com/find/m9381a)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

#### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

#### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700* *0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 9276201

For other unlisted Countries: [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)  
(BP-3-1-13)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2013  
Printed in USA, March 28, 2013  
5991-0279EN



**Agilent Technologies**