

**2015, 2015-P,  
2016, 2016-P**

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters



The Models 2015-P and 2016-P Audio Analyzing Digital Multimeters and the Models 2015 and 2016 Total Harmonic Distortion Multimeters combine audio band quality measurements and analysis with a full-function 6½-digit DMM. Test engineers can make a broad range of voltage, resistance, current, frequency, and distortion measurements, all with the same compact, half-rack measurement instrument. The Model 2016 and 2016-P have twice the sine wave generator output of the Model 2015 for applications that require test signals greater than 8Vrms. The Model 2015-P and 2016-P offer additional processing capacity for frequency spectrum analysis.

### Frequency Domain Distortion Analysis

For applications such as assessing non-linear distortion in components, devices, and systems, DSP-based processing allows the Models 2015-P, 2015, 2016, and 2016-P to provide frequency domain analysis in conventional time domain instruments. They

can measure Total Harmonic Distortion (THD) over the complete 20Hz to 20kHz audio band. They also measure over a wide input range (up to 750Vrms) and have low residual distortion (–87dB). The THD reading can be expressed either in decibels or as a percentage.


In addition to THD, the Models 2015, 2015-P, 2016, and 2016-P can compute THD+Noise and Signal-to-Noise plus Distortion (SINAD). For analyses in which the individual harmonics are the criteria of greatest interest, the instruments can report any of the (up to 64) harmonic magnitudes that can be included in the distortion measurements. The user can program the actual number of harmonics to be included in a computation, so accuracy, speed, and complexity can be optimized for a specific application. (See *Figure 1*.)

- THD, THD+Noise, and SINAD measurements
- 20Hz–20kHz sine wave generator
- Fast frequency sweeps
- 2015-P, 2016-P: Identifies peak spectral components
- 2015, 2015-P: 4Vrms single-ended or 8Vrms differential output
- 2016, 2016-P: 9.5Vrms single-ended or 19Vrms differential output
- Individual harmonic magnitude measurements
- 5 standard audio shaping filters
- 13 DMM functions (6½ digits)
- GPIB and RS-232 interfaces

### APPLICATIONS

- Wireless communication device audio quality testing
- Component linearity testing
- Lighting and ballast THD limit conformance testing
- Telephone and automotive speaker testing

**Figure 1. Frequency Spectrum of 1kHz Square Wave**

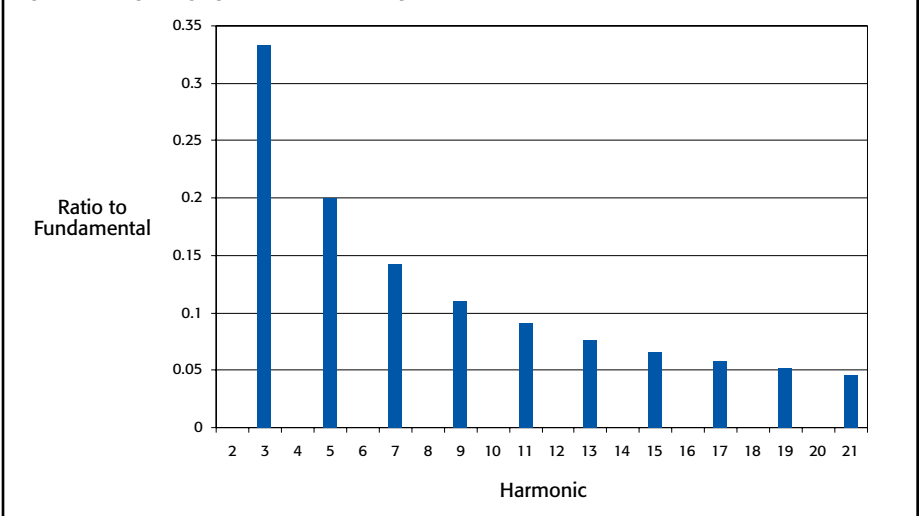

*Figure 1* shows a plot of a square wave's harmonics (frequency components) computed and transmitted to a personal computer by the Model 2015 or 2016. A square wave's spectral content consists of only odd harmonics whose magnitudes are (1/harmonic number × the magnitude of the fundamental). For example, the magnitude of the third harmonic is 1/3 the magnitude of the fundamental.

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

A Greater Measure of Confidence

**KEITHLEY**

A Tektronix Company

# 2015, 2015-P, 2016, 2016-P


## Ordering Information

|        |   |
|--------|---|
| 2015   | Total Harmonic Distortion 6½-Digit Multimeter             |
| 2015-P | Audio Analyzing DMM                                       |
| 2016   | Total Harmonic Distortion 6½-Digit DMM w/9V Source Output |
| 2016-P | Audio Analyzing DMM w/9V Source Output                    |

## Accessories Supplied

Model 1751 Safety Test Leads, User Manual, Service Manual.


**Figure 2. Total Harmonic Distortion Analysis and Frequency Response of a Portable Wireless Telecommunication Device** Device Under Test

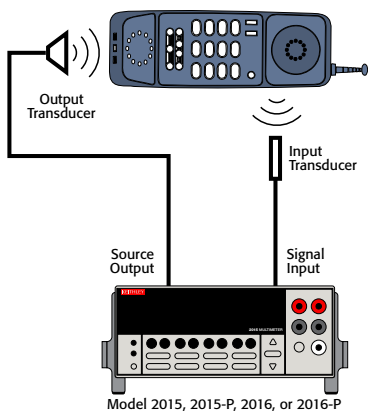


Figures 2, 3, and 4 demonstrate how the Model 2015, 2015-P, 2016, or 2016-P can provide both time domain and frequency domain measurements in a single test protocol. Figure 2 shows a sample test system schematic with a telecommunication device in a loop back mode test. The Audio Analyzing DMM's source provides a stimulus frequency sweep, and the Audio Analyzing DMM measures the response from the microphone circuit. Figure 3 shows the resulting frequency domain analysis of the THD and the first three harmonics as a function of frequency. Figure 4 shows the time domain analysis of microphone circuit output voltage as a function of frequency.

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

**Figure 3. THD and 2nd, 3rd, and 4th Harmonics as a Function of Frequency**

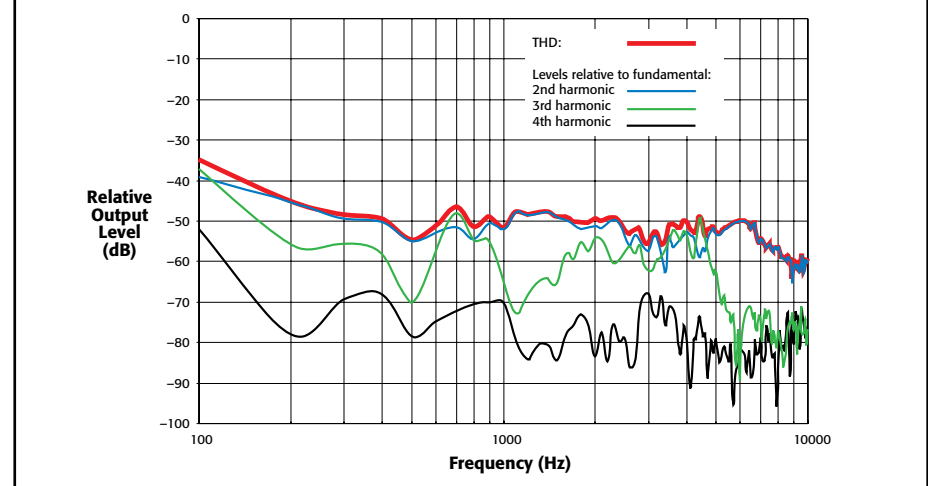

**Figure 4. Frequency Response**

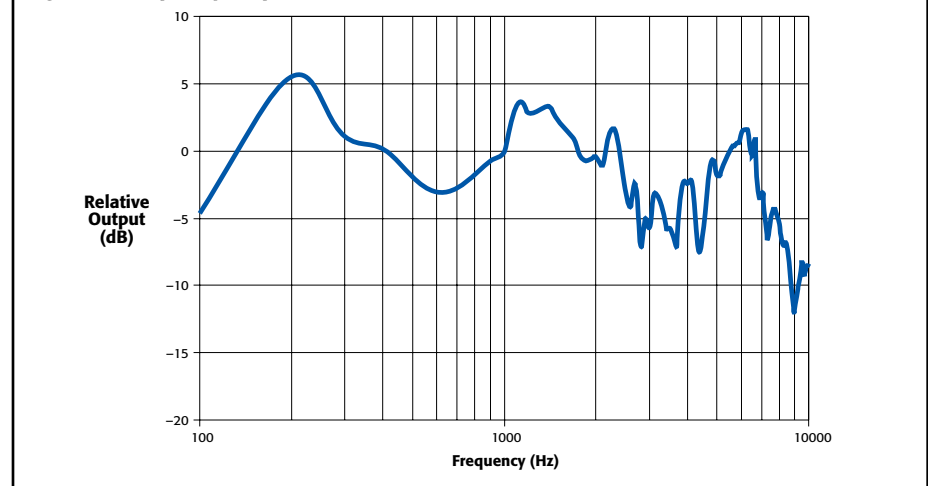

## Optimized for Production Testing






The Models 2015, 2015-P, 2016, and 2016-P can perform fast frequency sweeps for characterizing audio-band circuitry in production test systems. For example, the instruments can execute a single sweep of 30 frequencies and transmit both rms voltage readings and THD readings to a computer in only 1.1 seconds. With that data, a complete frequency response analysis and a harmonic distortion vs. frequency analysis can be performed in a very short time. Thus high speed testing of the audio performance of a high volume device such as a cellular telephone can be performed without reducing the number of tests or reducing the measurements in each test. With these instruments, which are optimized for production testing, test engineers can lower test times, in comparison to test speeds achievable with general purpose audio analyzers, without sacrificing production test quality.

## Dual Output Source

The Models 2015, 2015-P, 2016, and 2016-P include an internal audio band sine wave source for generating stimulus signals. A second output, the inverse of the first output, is also available, simplifying the testing of differential input circuits for common mode or noise cancellation performance.

**2015, 2015-P,  
2016, 2016-P**

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

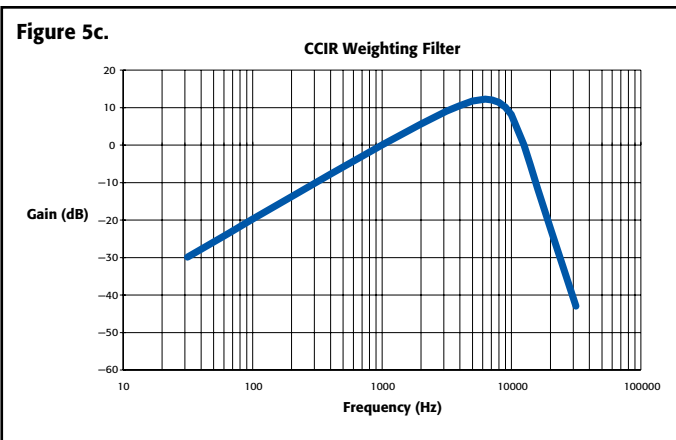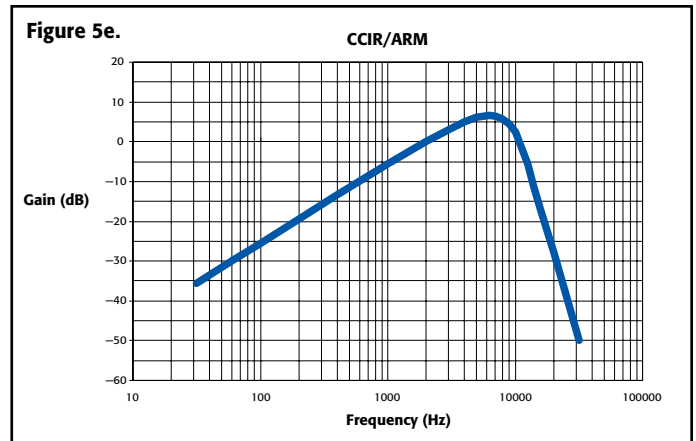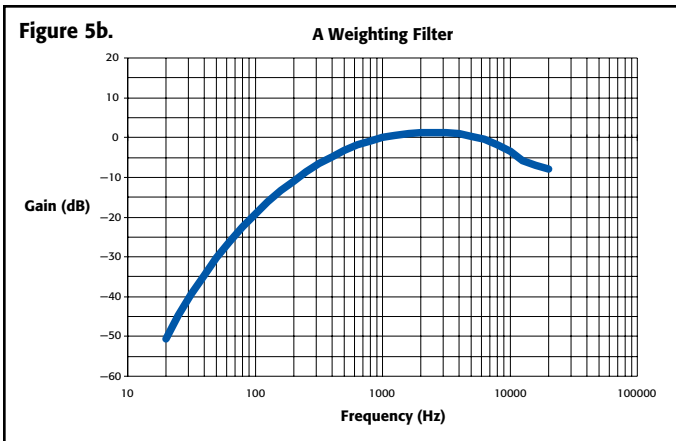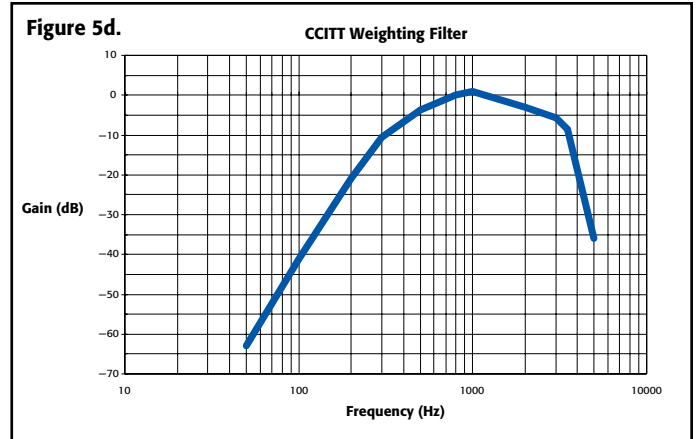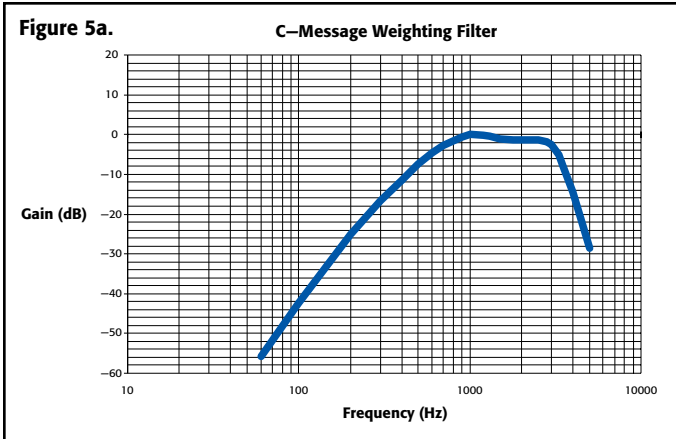

The Models 2015 and 2015-P have a 4Vrms single-ended output and 8Vrms differential source output. For tests that require a higher stimulus signal, the Model 2016 and 2016-P provide a 9.5Vrms single-ended output and a 19Vrms differential output.

### Wide Selection of Audio Filters

Five industry-standard bandpass filters are provided for shaping the input signal for audio and telecommunication applications. Available filters include the CCITT weighting filter, CCIR filter, C-message filter, CCIR/ARM filter, and "A" weighting filter (see *Figures 5a–5e*). The Models 2015, 2015-P, 2016, and 2016-P provide programmable, high cutoff (low pass) and low cutoff (high pass) filters. Furthermore, the two filters can be implemented together to form a bandpass filter. The programmable filters can be used to filter out noise generated by electromechanical machinery on the production floor or to simulate other types of system transmission characteristics.

### Broad Measurement Flexibility

In addition to their THD, THD+Noise, SINAD, and individual harmonic measurement capabilities, the instruments provide a comprehensive set of DMM functions, including DCV, ACV, DCI, ACI, 2WΩ, 4WΩ, temperature, frequency, period, dB, dBm, and continuity measurements, as well as diode testing. This multi-functional design minimizes added equipment costs when configuring test setups.

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

**KEITHLEY**

A Greater Measure of Confidence

A Tektronix Company

# 2015, 2015-P, 2016, 2016-P


# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

## Wide Band or Narrow Band Noise Measurements

The Models 2015, 2015-P, 2016, and 2016-P are capable of measuring both wide band noise and narrow band noise. Alternatively, these instruments' DSP (digital signal processing) capabilities allow users to make frequency domain measurements of RMS voltage noise over the 20Hz–20kHz frequency audio band or a narrow portion of the band. Furthermore, noise measurements can be extracted in the presence of a stimulus signal for fast signal-to-noise computations.

## Spectrum Analysis

The Model 2015-P and 2016-P have internal computational capabilities that allow them to characterize an acquired signal spectrum. These instruments can identify and report the frequency and amplitude of the highest value in a complete spectrum or within a specified frequency band. It can also identify additional peaks in descending order of magnitude (see **Figure 6**). The Model 2015-P's and 2016-P's on-board capabilities make it simple to obtain a thorough analysis of a frequency spectrum more quickly and with little or no need for external analysis software.

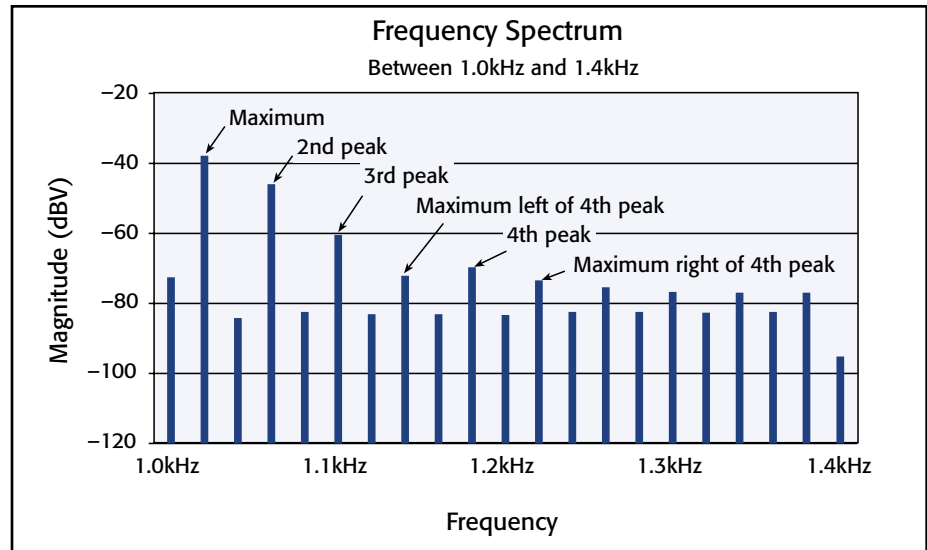

**Figure 6.** The Model 2015-P and 2016-P directly identify peak values of the frequency spectrum.



**Figure 7.** Rear panel of all models

## SERVICES AVAILABLE

|               |   |
|---------------|---|
| 2015-3Y-EW    | 1-year factory warranty extended to 3 years from date of shipment                         |
| 2015-P-3Y-EW  | 1-year factory warranty extended to 3 years from date of shipment                         |
| 2016-3Y-EW    | 1-year factory warranty extended to 3 years from date of shipment                         |
| 2016-P-3Y-EW  | 1-year factory warranty extended to 3 years from date of shipment                         |
| C/2015-3Y-ISO | 3 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2015, 2015-P* |
| C/2016-3Y-ISO | 3 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2016, 2016-P* |

\*Not available in all countries

## ACCESSORIES AVAILABLE

### CABLES/ADAPTERS

|                |  |
|----------------|--|
| 7007-1         | Shielded IEEE-488 Cable, 1m (3.3 ft)           |
| 7007-2         | Shielded IEEE-488 Cable, 2m (6.6 ft)           |
| 8501-1, 8501-2 | Trigger-Link Cables, 1m (3.3 ft), 2m (6.6 ft)  |
| 8502           | Trigger Link Adapter Box                       |
| 8503           | Trigger Link Cable to 2 male BNCs, 1m (3.3 ft) |
| 7009-5         | RS-232 Cable                                   |

### RACK MOUNT KITS

|        |                             |
|--------|-----------------------------|
| 4288-1 | Single Fixed Rack Mount Kit |
| 4288-2 | Dual Fixed Rack Mount Kit   |

### GPIB INTERFACES

|             |   |
|-------------|---|
| KPCI-488LPA | IEEE-488 Interface/Controller for the PCI Bus |
| KUSB-488B   | IEEE-488 USB-to-GPIB Interface Adapter        |

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

**2015, 2015-P,  
2016, 2016-P**

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

## DISTORTION CHARACTERISTICS

**VOLTAGE RANGE:** 100mV, 1V, 10V, 100V, 750V (user selectable).  
**INPUT IMPEDANCE:** 1MΩ paralleled by <100pF.  
**DISPLAY RANGE:** 0–100% or 0–100.00dB.  
**RESOLUTION:** 0.0001% or 0.00001dB.  
**FUNDAMENTAL FREQUENCY RANGE:** 20Hz–20kHz.  
**HARMONIC FREQUENCY RANGE:** 40Hz–50kHz.  
**FREQUENCY RESOLUTION:** 0.008Hz.  
**FREQUENCY ACCURACY:** ±0.01% of reading.  
**FREQUENCY TEMPERATURE COEFFICIENT:** ≤100ppm over operating temperature range.

| Measurement Mode                       | Accuracy (1 Year, 23°C ±5°C)                                | Residual Distortion <sup>1</sup>    |
|--|---|-------------------------------------|
| THD and individual harmonic magnitudes | ±0.8 dB,<br>20 Hz to 20 kHz <sup>2</sup>                    | 0.004% or –87 dB<br>20 Hz to 20 kHz |
| THD + n                                | ±1.5 dB,<br>100 Hz to 20 kHz <sup>2</sup>                   | 0.056% or –65 dB<br>20 Hz to 20 kHz |
| SINAD                                  | ±1.5 dB,<br>100 Hz to 20 kHz <sup>2</sup>                   | +65 dB<br>20 Hz to 20 kHz           |
| AC Level<br>V rms                      | ±(0.13% of reading +<br>0.009% of range)<br>20 Hz to 20 kHz |                                     |

## DISTORTION MEASUREMENT AUDIO FILTERS

None C-Message  
 CCITT Weighting CCIR/ARM  
 CCIR "A" Weighting

**NUMBER OF HARMONICS INCLUDED IN THD CALCULATION:** 2 to 64 (user selectable).  
**HI AND LO CUTOFF FILTERS (bus settable):** 20Hz–50kHz. Can be combined to form brickwall bandpass filter.

## DISTORTION MEASUREMENT READING RATE<sup>3</sup>

| Fundamental Frequency Acquisition Mode | Fundamental Frequency Range | Minimum Readings Per Second |
|--|-----------------------------|-----------------------------|
| Single acquisition or stored value     | 20 Hz to 100 Hz             | 14                          |
|  | 100 Hz to 1 kHz             | 24                          |
|  | 1 kHz to 20 kHz             | 28                          |
| Automatic                              | 20 Hz to 30 Hz              | 5.5                         |
|  | 30 Hz to 400 Hz             | 6                           |
|  | 400 Hz to 20 kHz            | 6.6                         |

## FREQUENCY SWEEP READING RATE

| Number of Frequencies | Time (seconds) <sup>4</sup> |
|-----------------------|-----------------------------|
| 5                     | 0.2                         |
| 30                    | 1.1                         |
| 100                   | 3.5                         |
| 200                   | 6.9                         |

## NOTES

- Input signal at full scale.
- V<sub>IN</sub> ≥20% of range and harmonics > –65dB.
- Speeds are for default operating conditions (\*RST), and display off, auto range off, binary data transfer, trig delay = 0.
- Typical times: frequencies in 400–4kHz range, binary data transfer, TRIG DELAY = 0, Display OFF, Auto Range OFF. Data returned is THD measurement plus AC voltage.

## GENERATOR CHARACTERISTICS

**FREQUENCY RANGE:** 10–20kHz.  
**FREQUENCY RESOLUTION:** 0.007Hz.  
**FREQUENCY ACCURACY:** ±(0.015% of reading + 0.007Hz)<sup>1</sup>.  
**FREQUENCY TEMPERATURE COEFFICIENT:** <100ppm over operating temperature range.

## SOURCE OUTPUT:

**WAVEFORM:** Sinewave.  
**AMPLITUDE RANGE:** 2015, 2015-P: 2V rms (50Ω and 600Ω) or 4V rms (HI Z).  
 2016, 2016-P: 4.75V rms (50Ω and 600Ω) or 9.5V rms (HI Z).  
**AMPLITUDE RESOLUTION:** 2015, 2015-P: 0.5mV rms (50Ω and 600Ω) or 1mV rms (HI Z).  
 2016, 2016-P: 1.25mV rms (50Ω and 600Ω) or 2.5mV rms (HI Z).  
**AMPLITUDE ACCURACY:** 2015, 2015-P: ±(0.3% of setting + 2mV)<sup>1,4</sup>.  
 2016, 2016-P: ±(0.3% of setting + 5mV)<sup>1,4</sup>.  
**AMPLITUDE TEMPERATURE COEFFICIENT:** Typically 0.015%/°C.  
**AMPLITUDE FLATNESS:** ±0.1dB<sup>1,4,5</sup>.  
**OUTPUT IMPEDANCE:** 50Ω ± 1Ω or 600Ω ± 10Ω, user selectable.  
**THD:** –64dB<sup>6</sup>.  
**NOISE:** 2015, 2015-P: 100μV rms<sup>2</sup>.  
 2016, 2016-P: 250μV rms<sup>2</sup>.  
**DC OFFSET VOLTAGE:** 2015, 2015-P: ±1.2mV<sup>1</sup>. 2016, 2016-P: ±3mV<sup>1</sup>.

## INV/PULSE OUTPUT (SENEWAVE MODE):

**FREQUENCY:** Same as source output.  
**AMPLITUDE RANGE:** 2015, 2015-P: 2V rms (50Ω and 600Ω) or 4V rms (HI Z).  
 2016, 2016-P: 4.75V rms (50Ω and 600Ω) or 9.5V rms (HI Z).  
**AMPLITUDE RESOLUTION:** 2015, 2015-P: 0.5mV (50Ω and 600Ω) or 1mV rms (HI Z).  
 2016, 2016-P: 1.25mV rms (50Ω and 600Ω) or 2.5mV rms (HI Z).  
**AMPLITUDE ACCURACY:** 2015, 2015-P: ±(2.0% of setting + 2mV)<sup>1,4</sup>.  
 2016, 2016-P: ±(2.0% of setting + 5mV)<sup>1,4</sup>.  
**AMPLITUDE FLATNESS:** ±0.1dB<sup>1,4,5</sup>.  
**OUTPUT IMPEDANCE:** Same as Source Output setting.  
**THD:** –64dB<sup>6</sup>.  
**NOISE:** 2015, 2015-P: 100μV rms<sup>2</sup>.  
 2016, 2016-P: 250μV rms<sup>2</sup>.  
**DC OFFSET VOLTAGE:** 2015, 2015-P: ±1.1mV typ., ±13mV max.<sup>1</sup>  
 2016, 2016-P: ±3mV typ., ±13mV max.<sup>1</sup>

## INV/PULSE OUTPUT (PULSE MODE):

**FREQUENCY:** Same as source output.  
**DUTY CYCLE:** 45% ±3%.  
**OUTPUT IMPEDANCE:** Same output impedance as the source output.  
**AMPLITUDE:** 0.0V ±0.07V to 4.9V ±0.12V pulse open circuit<sup>1,3</sup>.  
 0.0V ±0.05V to 3.3V ±0.08V pulse 100Ω load<sup>1,3</sup>.  
**OVERSHOOT:** 1.0V maximum pulse open circuit<sup>3</sup>.  
 0.2V maximum with 100Ω load pulse open circuit<sup>3</sup>.  
**UNDERSHOOT:** 1.1V maximum pulse open circuit<sup>3</sup>.  
 0.45V maximum with 100Ω load pulse open circuit<sup>3</sup>.

## NOTES

- 1 year, 23°C ±5°C.
- Measured at V<sub>OUT</sub> = 0V with gain 100 amplifier and 2-pole 50kHz low pass filter, Inv/Pulse in sinewave mode, HI Z output impedance, and no load.
- With HI Z output impedance and 1m 50Ω coaxial cable.
- HI Z output impedance, no load.
- 4V output.
- THD measurement includes harmonics 2 through 5, 1V rms output, HI Z, no load.

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A Greater Measure of Confidence

A Tektronix Company

Model 2015, 2015-P, 2016, 2016-P specifications

DIGITAL MULTIMETERS & SYSTEMS



# 2015, 2015-P, 2016, 2016-P

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

## DC Characteristics

CONDITIONS: MED (1 PLC)<sup>3</sup> or SLOW (10 PLC) or MED (1 PLC) with filter of 10.

| Function                 | Range                         | Resolution | Test Current or Burden Voltage (±5%) | Input Resistance | Accuracy: ±(ppm of reading + ppm of range)<br>(ppm = parts per million) (e.g., 10ppm = 0.001%) |                     |                     | Temperature Coefficient<br>0°–18°C & 28°–50°C |
|--------------------------|-------------------------------|------------|--------------------------------------|------------------|--|---------------------|---------------------|---|
|                          |                               |            |                                      |                  | 24 Hour <sup>14</sup><br>23°C ± 1°   | 90 Day<br>23°C ± 5° | 1 Year<br>23°C ± 5° |   |
| Voltage                  | 100.0000 mV                   | 0.1 μV     |                                      | > 10 GΩ          | 30 + 30  | 40 + 35             | 50 + 35             | 2 + 6   |
|                          | 1.000000 V                    | 1.0 μV     |                                      | > 10 GΩ          | 15 + 6   | 25 + 7              | 30 + 7              | 2 + 1   |
|                          | 10.000000 V                   | 10 μV      |                                      | > 10 GΩ          | 15 + 4   | 20 + 5              | 30 + 5              | 2 + 1   |
|                          | 100.0000 V                    | 100 μV     |                                      | 10 MΩ ±1%        | 15 + 6   | 30 + 6              | 45 + 6              | 5 + 1   |
|                          | 1000.0000 V <sup>9</sup>      | 1 mV       |                                      | 10 MΩ ±1%        | 20 + 6   | 35 + 6              | 45 + 6              | 5 + 1   |
| Resistance <sup>15</sup> | 100.0000 Ω                    | 100 μΩ     | 1 mA                                 |                  | 30 + 30  | 80 + 40             | 100 + 40            | 8 + 6   |
|                          | 1.000000 kΩ                   | 1 mΩ       | 1 mA                                 |                  | 20 + 6   | 80 + 10             | 100 + 10            | 8 + 1   |
|                          | 10.000000 kΩ                  | 10 mΩ      | 100 μA                               |                  | 20 + 6   | 80 + 10             | 100 + 10            | 8 + 1   |
|                          | 100.000000 kΩ                 | 100 mΩ     | 10 μA                                |                  | 20 + 6   | 80 + 10             | 100 + 10            | 8 + 1   |
|                          | 1.000000MΩ <sup>16</sup>      | 1 Ω        | 10 μA                                |                  | 20 + 6   | 80 + 10             | 100 + 10            | 8 + 1   |
|                          | 10.000000MΩ <sup>11, 16</sup> | 10 Ω       | 700 nA // 10MΩ                       |                  | 300 + 6  | 450 + 10            | 600 + 10            | 95 + 1  |
|                          | 100.00000MΩ <sup>11, 16</sup> | 100 Ω      | 700 nA // 10MΩ                       |                  | 1600 + 30  | 2000 + 30           | 2200 + 30           | 900 + 1                                       |
|                          |                               |            |                                      |                  |  |                     |                     |   |
| Current                  | 10.000000 mA                  | 10 nA      | < 0.15 V                             |                  | 60 + 30  | 300 + 80            | 500 + 80            | 50 + 5  |
|                          | 100.000000 mA                 | 100 nA     | < 0.03 V                             |                  | 100 + 300  | 300 + 800           | 500 + 800           | 50 + 50                                       |
|                          | 1.00000000 A                  | 1 μA       | < 0.3 V                              |                  | 200 + 30   | 500 + 80            | 800 + 80            | 50 + 5  |
|                          | 3.00000000 A                  | 10 μA      | < 1 V                                |                  | 1000 + 15  | 1200 + 40           | 1200 + 40           | 50 + 5  |
| Continuity 2W            | 1 kΩ                          | 100 mΩ     | 1 mA                                 |                  | 40 + 100   | 100 + 100           | 120 + 100           | 8 + 1   |
| Diode Test               | 3.000000 V                    | 10 μV      | 1 mA                                 |                  | 20 + 6   | 30 + 7              | 40 + 7              | 8 + 1   |
|                          | 10.000000 V                   | 10 μV      | 100 μA                               |                  | 20 + 6   | 30 + 7              | 40 + 7              | 8 + 1   |
|                          | 10.000000 V                   | 10 μV      | 10 μA                                |                  | 20 + 6   | 30 + 7              | 40 + 7              | 8 + 1   |

## DC OPERATING CHARACTERISTICS<sup>2</sup>

| Function              | Digits            | Readings/s | PLCs <sup>8</sup> |
|-----------------------|-------------------|------------|-------------------|
|                       | 6½ <sup>3,4</sup> | 5          | 10                |
|                       | 6½ <sup>3,7</sup> | 30         | 1                 |
| DCV (all ranges),     | 6½ <sup>3,5</sup> | 50         | 1                 |
| DCI (all ranges),     | 5½ <sup>3,5</sup> | 270        | 0.1               |
| 2W Ohms (<10M ranges) | 5½ <sup>5</sup>   | 500        | 0.1               |
|                       | 5½ <sup>5</sup>   | 1000       | 0.04              |
|                       | 4½ <sup>5</sup>   | 2000       | 0.01              |

## DC SYSTEM SPEEDS<sup>2, 6</sup>

RANGE CHANGE<sup>3</sup>: 50/s.

FUNCTION CHANGE<sup>3</sup>: 45/s.

AUTORANGE TIME<sup>3, 10</sup>: <30ms.

ASCII READINGS TO RS-232 (19.2K baud): 55/s.

MAX. INTERNAL TRIGGER RATE: 2000/s.

MAX. EXTERNAL TRIGGER RATE: 400/s.

## DC GENERAL

LINEARITY OF 10VDC RANGE: ±(1ppm of reading + 2ppm of range).

DCV, Ω, TEMPERATURE, CONTINUITY, DIODE TEST INPUT PROTECTION: 1000V, all ranges.

MAXIMUM 4WΩ LEAD RESISTANCE: 10% of range per lead for 100Ω and 1kΩ ranges; 1kΩ per lead for all other ranges.

DC CURRENT INPUT PROTECTION: 3A, 250V fuse.

SHUNT RESISTOR: 0.1Ω for 3A, 1A, and 100mA ranges. 10Ω for 10mA range.

CONTINUITY THRESHOLD: Adjustable 1Ω to 1000Ω.

AUTOZERO OFF ERROR: Add ±(2ppm of range error + 5μV) for <10 minutes and ±1°C change.

OVERRANGE: 120% of range except on 1000V, 3A, and Diode.

## SPEED AND NOISE REJECTION

| Rate     | Readings/s | Digits | RMS Noise<br>10V Range | NMRR <sup>12</sup> | CMRR <sup>13</sup> |
|----------|------------|--------|------------------------|--------------------|--------------------|
| 10 PLC   | 5          | 6½     | < 1.5 μV               | 60 dB              | 140 dB             |
| 1 PLC    | 50         | 6½     | < 4 μV                 | 60 dB              | 140 dB             |
| 0.1 PLC  | 500        | 5½     | < 22 μV                | —                  | 80 dB              |
| 0.01 PLC | 2000       | 4½     | < 150 μV               | —                  | 80 dB              |

## DC NOTES

- Add the following to ppm of range accuracy specification based on range: 1V and 100V, 2ppm; 100mV, 15ppm; 100Ω, 15ppm; 1kΩ–1MΩ, 2ppm; 10mA and 1A, 10ppm; 100mA, 40ppm.
- Speeds are for 60Hz operation using factory default operating conditions (\*RST). Autorange off, Display off, Trigger delay = 0.
- Speeds include measurement and binary data transfer out the GPIB.
- Auto zero off.
- Sample count = 1024, auto zero off.
- Auto zero off, NPLC = 0.01.
- Ohms = 24 readings/second.
- 1 PLC = 16.67ms @ 60Hz, 20ms @ 50Hz/400Hz. The frequency is automatically determined at power up.
- For signal levels >500V, add 0.02ppm/V uncertainty for the portion exceeding 500V.
- Add 120ms for ohms.
- Must have 10% matching of lead resistance in Input HI and LO.
- For line frequency ±0.1%.
- For 1kΩ unbalance in LO lead.
- Relative to calibration accuracy.
- Specifications are for 4-wire ohms. For 2-wire ohms, add 1Ω additional uncertainty.
- For rear inputs. Add the following to Temperature Coefficient "ppm of reading" uncertainty: 10MΩ 70ppm, 100MΩ 385ppm. Operating environment specified for 0° to 50°C, 50% RH at 35°C.

**2015, 2015-P,  
2016, 2016-P**

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

## True RMS AC Voltage and Current Characteristics

| Voltage Range | Resolution | Calibration Cycle                             | Accuracy <sup>1</sup> : ±(% of reading + % of range), 23°C ±5 °C |               |                |                 |                  |
|---------------|------------|---|--|---------------|----------------|-----------------|------------------|
|               |            |   | 3 Hz– 10 Hz <sup>10</sup>  | 10 Hz– 20 kHz | 20 kHz– 50 kHz | 50 kHz– 100 kHz | 100 kHz– 300 kHz |
| 100.0000 mV   | 0.1 μV     | 90 Days<br>1 Year                             |  |               |                |                 |                  |
| 1.000000 V    | 1.0 μV     |   | 0.35 + 0.03  | 0.05 + 0.03   | 0.11 + 0.05    | 0.60 + 0.08     | 4 + 0.5          |
| 10.00000 V    | 10 μV      |   | 0.35 + 0.03  | 0.06 + 0.03   | 0.12 + 0.05    | 0.60 + 0.08     | 4 + 0.5          |
| 100.0000 V    | 100 μV     |   |  |               |                |                 |                  |
| 750.000 V     | 1 mV       |   |  |               |                |                 |                  |
|               |            | <b>Temperature Coefficient/°C<sup>8</sup></b> | 0.035 + 0.003  | 0.005 + 0.003 | 0.006 + 0.005  | 0.01 + 0.006    | 0.03 + 0.01      |

| Current Range          | Resolution | Calibration Cycle                             | 3 Hz–10 Hz    | 10 Hz–3 kHz   | 3 kHz–5 kHz   |
|------------------------|------------|---|---------------|---------------|---------------|
| 1.000000 A             | 1 μA       | 90 Day/1 Year                                 | 0.30 + 0.04   | 0.10 + 0.04   | 0.14 + 0.04   |
| 3.00000 A <sup>9</sup> | 10 μA      | 90 Day/1 Year                                 | 0.35 + 0.06   | 0.15 + 0.06   | 0.18 + 0.06   |
|                        |            | <b>Temperature Coefficient/°C<sup>8</sup></b> | 0.035 + 0.006 | 0.015 + 0.006 | 0.015 + 0.006 |

### HIGH CREST FACTOR ADDITIONAL ERROR ±(% of reading)<sup>7</sup>

|                   |      |      |      |      |
|-------------------|------|------|------|------|
| CREST FACTOR:     | 1–2  | 2–3  | 3–4  | 4–5  |
| ADDITIONAL ERROR: | 0.05 | 0.15 | 0.30 | 0.40 |

### AC OPERATING CHARACTERISTICS<sup>2</sup>

| Function                                  | Digits          | Readings/s | Rate | Bandwidth      |
|---|-----------------|------------|------|----------------|
| ACV (all ranges),<br>and ACI (all ranges) | 6½ <sup>3</sup> | 2s/reading | SLOW | 3 Hz–300 kHz   |
|   | 6½ <sup>3</sup> | 1.4        | MED  | 30 Hz–300 kHz  |
|   | 6½ <sup>4</sup> | 4.8        | MED  | 30 Hz–300 kHz  |
|   | 6½ <sup>3</sup> | 2.2        | FAST | 300 Hz–300 kHz |
|   | 6½ <sup>4</sup> | 35         | FAST | 300 Hz–300 kHz |

### ADDITIONAL LOW FREQUENCY ERRORS ±(% of reading)

|                 | Slow | Med | Fast |
|-----------------|------|-----|------|
| 20 Hz – 30 Hz   | 0    | 0.3 | —    |
| 30 Hz – 50 Hz   | 0    | 0   | —    |
| 50 Hz – 100 Hz  | 0    | 0   | 1.0  |
| 100 Hz – 200 Hz | 0    | 0   | 0.18 |
| 200 Hz – 300 Hz | 0    | 0   | 0.10 |
| > 300 Hz        | 0    | 0   | 0    |

### AC SYSTEM SPEEDS<sup>2, 5</sup>

FUNCTION/RANGE CHANGE<sup>6</sup>: 4/s.  
 AUTORANGE TIME: <3s.  
 ASCII READINGS TO RS-232 (19.2k baud)<sup>4</sup>: 50/s.  
 MAX. INTERNAL TRIGGER RATE<sup>4</sup>: 300/s.  
 MAX. EXTERNAL TRIGGER RATE<sup>4</sup>: 260/s.

### AC GENERAL

INPUT IMPEDANCE: 1MΩ ±2% paralleled by <100pF.  
 ACV INPUT PROTECTION: 1000Vp.  
 MAXIMUM DCV: 400V on any ACV range.  
 ACI INPUT PROTECTION: 3A, 250V fuse.  
 BURDEN VOLTAGE: 1A Range: <0.3V rms. 3A Range: <1V rms.  
 SHUNT RESISTOR: 0.1Ω on all ACI ranges.  
 AC CMRR: >70dB with 1kΩ in LO lead.  
 MAXIMUM CREST FACTOR: 5 at full scale.  
 VOLT HERTZ PRODUCT: ≤8 × 10<sup>6</sup>VHz.  
 OVERRANGE: 120% of range except on 750V and 3A ranges.

### AC NOTES

- Specifications are for SLOW rate and sine wave inputs >5% of range.
- Speeds are for 60Hz operation using factory default operating conditions (\*RST). Auto zero off, Auto range off, Display off, includes measurement and binary data transfer out the GPIB.
- 0.01% of step settling error. Trigger delay = 400ms.
- Trigger delay = 0.
- DETECTOR: BANDwidth 300, NPLC = 0.01.
- Maximum useful limit with trigger delay = 175ms.
- Applies to non-sine waves >5Hz and <500Hz. (Guaranteed by design for crest factors >4.3.)
- Applies to 0°–18°C and 28°–50°C.
- For signal levels >2.2A, add additional 0.4% to "of reading" uncertainty.
- Typical uncertainties. Typical represents two sigma or 95% of manufactured units measure <0.35% of reading and three sigma or 99.7% <1.06% of reading.

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A Greater Measure of Confidence

A Tektronix Company

Model 2015, 2015-P, 2016, 2016-P specifications

DIGITAL MULTIMETERS & SYSTEMS

# 2015, 2015-P, 2016, 2016-P

# 6½-Digit THD Multimeters 6½-Digit Audio Analyzing Multimeters

## Triggering and Memory

READING HOLD SENSITIVITY: 0.01%, 0.1%, 1%, or 10% of reading.

TRIGGER DELAY: 0 to 99 hrs (1ms step size).

EXTERNAL TRIGGER LATENCY:  $200\mu\text{s} + <300\mu\text{s}$  jitter with autozero off, trigger delay = 0.

MEMORY: 1024 readings.

## Math Functions

Rel, Min/Max/Average/StdDev (of stored reading), dB, dBm, Limit Test, %, and  $mX+b$  with user defined units displayed.

**dBm REFERENCE RESISTANCES:** 1 to 9999 $\Omega$  in 1 $\Omega$  increments.

## Standard Programming Languages

SCPI (Standard Commands for Programmable Instruments).

## Frequency and Period Characteristics <sup>1, 2</sup>

| ACV Range          | Frequency Range    | Period Range                 | Gate Time    | Resolution $\pm$ (ppm of reading) | Accuracy 90 Day/1 Year $\pm$ (% of reading) |
|--------------------|--------------------|------------------------------|--------------|-----------------------------------|---|
| 100 mV to<br>750 V | 3 Hz to<br>500 kHz | 333 ms<br>to 2 $\mu\text{s}$ | 1 s (SLOW)   | 0.333                             | 0.01  |
|                    |                    |                              | 0.1 s (MED)  | 3.33                              | 0.01  |
|                    |                    |                              | 10 ms (FAST) | 33.3                              | 0.01  |

### FREQUENCY NOTES

- Specifications are for square wave inputs only. Input signal must be  $>10\%$  of ACV range. If input is  $<20\text{mV}$  on the 100mV range, then the frequency must be  $>10\text{Hz}$ .
- 20% overrange on all ranges except 750V range.

## Temperature Characteristics

### Thermocouple <sup>2, 3, 4</sup>

| Type | Range            | Resolution | Accuracy <sup>1</sup><br>90 Day/1 Year (23°C $\pm$ 5°C)<br>Relative to Reference Junction |
|------|------------------|------------|---|
| J    | -200 to + 760°C  | 0.001°C    | $\pm 0.5^\circ\text{C}$   |
| K    | -200 to + 1372°C | 0.001°C    | $\pm 0.5^\circ\text{C}$   |
| T    | -200 to + 400°C  | 0.001°C    | $\pm 0.5^\circ\text{C}$   |

### TEMPERATURE NOTES

- For temperatures  $<-100^\circ\text{C}$ , add  $\pm 0.1^\circ\text{C}$  and  $>900^\circ\text{C}$  add  $\pm 0.3^\circ\text{C}$ .
- Temperature can be displayed in  $^\circ\text{C}$ , K, or  $^\circ\text{F}$ .
- Accuracy based on ITS-90.
- Exclusive of thermocouple error.

## GENERAL

**POWER SUPPLY:** 100V/120V/220V/240V.

**LINE FREQUENCY:** 50Hz to 60Hz and 400Hz, automatically sensed at power-up.

**POWER CONSUMPTION:** 40VA.

**VOLT HERTZ PRODUCT:**  $\leq 8 \times 10^7 \text{V}\cdot\text{Hz}$ .

**SAFETY:** Conforms to European Union Low Voltage Directive.

**EMC:** Conforms to European Union EMC Directive.

**VIBRATION:** MIL-PRF-28800F Class 3 Random.

**OPERATING ENVIRONMENT:** Specified for  $0^\circ\text{C}$  to  $50^\circ\text{C}$ . Specified to 80% R.H. at  $35^\circ\text{C}$  and at an altitude of up to 2,000 meters.

**STORAGE ENVIRONMENT:**  $-40^\circ\text{C}$  to  $70^\circ\text{C}$ .

**WARMUP:** 1 hour to rated accuracy.

### DIMENSIONS:

**Rack Mounting:** 89mm high  $\times$  213mm wide  $\times$  370mm deep (3.5 in  $\times$  8.38 in  $\times$  14.56 in).

**Bench Configuration (with handle and feet):** 104mm high  $\times$  238mm wide  $\times$  370mm deep (4.13 in  $\times$  9.38 in  $\times$  14.56 in).

**NET WEIGHT:** 4.2kg (8.8 lbs).

**SHIPPING WEIGHT:** 5kg (11 lbs).

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)