

MT9090A

Network Master Series

MU909011A

Drop Cable Fault Locator Modules

780nm and 1550nm OTDR for Single Mode Fiber



Fault Locate Step 18:12:20

Analysis Summary PASS

End/Fault Distance 55 ft

Loss at OTDR Connection 0.67 dB

Total Loss (Incl Loss at OTDR) 0.67 dB

Total Loss Threshold 1.50 dB

No.	Distance (ft)	Type	Loss (dB)	Ref. (dB)
1.1	0	✓	N/A	N/A
1.2	5	∩	N/A	>-58.6
2	55	∩	END	>-70.0

Stop

Total Loss Threshold

Power Meter

View Trace



Last Mile Testing Redefined!

MT9090A/MU909011A OVERVIEW

Until now, the right tool just didn't exist for cost effectively testing short fibers. Handheld OTDRs and Fault Locators lacked the resolution and in such short spans while mini-OTDRs were too large, too expensive and too complicated.

The new MT9090A from Anritsu finally addresses this need by providing all of the features and performance required for installation and maintenance of short fibers in a compact, modular test set. The MT9090A represents an unmatched level of value and ease of use, while not compromising performance. Data sampling of five centimeters and deadzones of less than one meter, ensure accurate and complete fiber evaluation while a simple testing sequence requires only one key press to initiate – allowing anyone to make error-free measurements.

The MT9090A represents a new era in drop cable and premise testing. Its ease of use, low price, high-resolution and size make this the perfect product for "last mile" testing.

Key Features

- Unique, purpose-built solution for short fiber applications such as FTTx drop cables
- Exclusive, integrated launch fiber provides accurate initial connector measurement without external devices
- High resolution, widescreen color display that is easy to read indoors or out
- Fixed parameters simplify operation and ensure proper set-up – just press "START"
- High resolution and extremely short deadzones ensure thorough short fiber evaluation
- Rugged, sealed design provides years of service in the most challenging environments
- Modular platform ensures maximum return on investment
- Compact and lightweight design for maximum portability in the field
- Complete FTTx maintenance tool including optical power meter and visible source "red light"
- Unique 780 nm wavelength for in-service maintenance of PONs without filters
- High performance without a high price

Purpose-Built for Short Fiber Applications

Realizing that short fiber premise applications such as FTTH drop cables, intra-building riser cables and cell towers have different testing requirements, Anritsu designed the MT9090A from the ground up. It features 5 cm resolution for accurate mapping of events, deadzones of less than 1 meter (3 feet) and a built-in 10 m (30 ft) launch fiber to ensure everything is evaluated.

Quick Startup

The MT9090A is ready for measurement in about 15 seconds so productive work can start immediately.

Long Battery Life

Since AC power is not always available where you need it, especially at fiber pedestals, the MT9090A typically provides 3.5 hours of testing on a single charge. This coupled with an optional car cigarette lighter cord guarantees the MT9090A is ready when you are.

Portable

With its lightweight design and user friendly dimensions, the MT9090A is perfect for the outside plant environment and can easily be managed with one hand. The standard softcase with shoulder strap further increases portability when traveling from the truck to the testing site.

Rugged

With no fans or vents to allow dust and moisture to enter the unit, the MT9090A was designed for the challenging outside plant environment.


Small on price, not on features!



- 1) 4.3" high resolution, indoor/outdoor color display
- 2) Dedicated function keys for performing tasks
- 3) START key for true one-button testing
- 4) Arrow keys for zooming, cursor movement and menu navigation

4.3 inch Wide Screen Display for Easy Viewing

The high resolution, full color, 4.3 inch wide screen display is the perfect format for viewing OTDR results. It also provides excellent readability both indoors and outdoors.

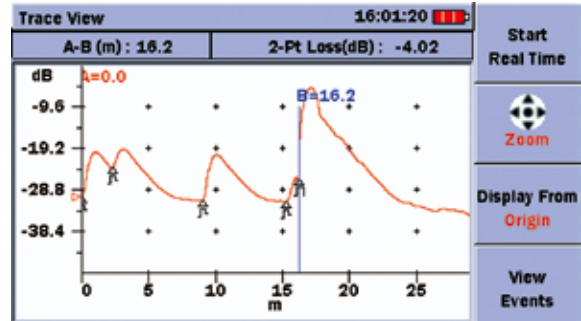

<1m Dead Zone for Short Fiber Analysis

With less than 1m dead zones, the MT9090A is perfect for evaluating central office, FTTH and intra building cables.

No Experience Required

With the MT9090A, the expertise is built in. With an automated testing sequence, fixed parameters and PASS/FAIL classification, anyone can certify and troubleshoot drop cables or premise networks.



- 5) SET to select/accept
- 6) Menu key for easy access to set-ups and mass storage
- 7) Integrated power meter option
- 8) Visible laser diode option
- 9) Dual USB ports for quick and easy data transfer

Despite its size...it is not a toy!

When buying products, you tend to choose ones that are innovative and from established companies. When you need to install and maintain optical networks, this should also apply. With over 50 years of combined OTDR design, Anritsu, which now includes NetTest, delivers the features that matter.

Having been in the test and measurement business for a long time, we understand the importance of performance, portability, reliability, easy operation and of course price.

Real Time Sweeping

In the field, real-time sweeping is often very useful to confirm correct fiber splicing and placement.

Integrated Launch Fiber

To further simplify testing, the MU909011A has 10 m (30 ft) of fiber built-in so initial fiber connections can be verified without the need for additional patchcords or launch fibers.

Full Trace View

The user can also select to view the full trace for additional information or to initiate real time testing.

Event Table with User Defined Thresholds

PASS/FAIL thresholds for key acceptance criteria such as splice loss, reflectance and total span loss can be set in the MT9090A allowing technicians to easily assess a fiber's condition. Failing values are clearly highlighted in the event table alerting technicians of potential problems.

Visible Light Source

An optional visible laser diode "red light" to visually troubleshoot splices, connectors and the fiber management is also available.



Integrated Power Meter (through OTDR port)

The optional power meter allows users to verify the presence of signals and then fault locate with one instrument – and without having to disconnect and move the fiber to another port.

Screen Capture Function

Screen shots are sometimes useful for adding to reports so the MT9090A features the ability to save screen shots as Bitmap images.

Free and Simple Software Upgrades

Firmware upgrades are easily performed via USB and available from the Anritsu website for registered users or through Anritsu customer support.



Simple Data Storage

With internal data storage plus support for external USB memory devices, the MT9090A is more than capable. Add to this auto file saving and naming for easy, error-free documenting of your network.

Common OTDR Data Format


The MT9090A supports the universal Telcordia SR-4731 format making it compatible with not only legacy Anritsu and NetTest products, but with many other vendors data.

Easy "drag and drop" File Transfers

When the MT9090A is connected to a PC via a USB cable, the internal memory can be directly accessed. Data can be selected, dragged and dropped into the PC memory, greatly simplifying file transfers. The MT9090A also supports the use of USB memory sticks.

Modular Design

The MT9090A features a modular design allowing modules to be easily changed in the field. Users can interchange different wavelength fault locator modules or perform other optical network testing such as optical channel analysis with the available CWDM channel analyzer module. Operation is quite similar between modules so the user is immediately familiar with operation.

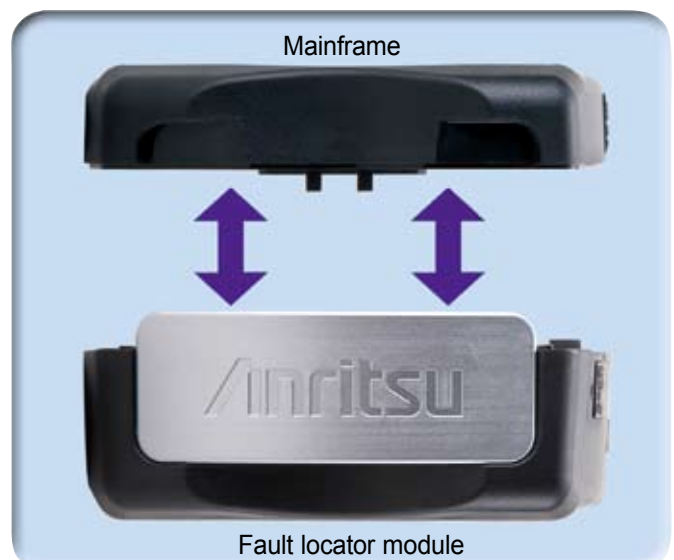

Installation and Maintenance Simplified

Since the MT9090A is purpose built for testing short fiber spans, its hardware and user interface are optimized for simplicity. A customizable testing sequence automates testing and guides novice users.

Installation Simplified

The MU909011A fault locator module provides easy and accurate verification of drop cable installation. The user simply connects the fiber and presses “START” for true one-button testing - all settings are fixed to ensure accurate and consistent results for any skill level. Upon completion, the length, total loss and PASS/FAIL status are displayed within seconds. A full event table of all characteristics is also shown providing additional information on the fiber under test.

Step 1 – Connect fiber and power on




Step 2 – Press “START”

The connection check feature ensures that the fiber to be tested is properly cleaned and connected correctly.



Step 3 – Read Results

Test results including all splices and connectors, as well as total fiber length, loss and PASS/FAIL status are shown in an easy to read table.

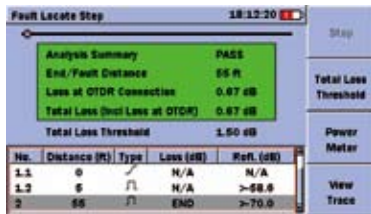

A Unique Approach to In-Service Maintenance

Since multiple users share the common feed fiber, FTTx maintenance becomes difficult when only one or two users are down. Traditionally, 1625 nm or 1650 nm wavelengths were used to test active fibers however these wavelengths typically need costly WDM couplers and filters in the network. As a unique approach to this, Anritsu also offers a 780 nm Fault Locator module that can be used to troubleshoot in-service FTTx networks without costly filters and without disruption to other customers. This offers a clear advantage over PON specific power meters that only verify signal presence but still rely on an additional OTDR or fault locator to locate the cause. With the MT9090A, one box does it all !

Step 1 – Verify ONT Fault

Step 2 - Disconnect fiber from ONT and connect to MT9090A

Step 3 – Verify signal presence and level


Good signal – replace ONT

No signal – press “continue” to launch fault locate test

Low signal - press “continue” to launch fault locate test

(780 nm will not interfere with 1490 or 1550 nm transmissions)*1, *2

Step 4 – Review Results

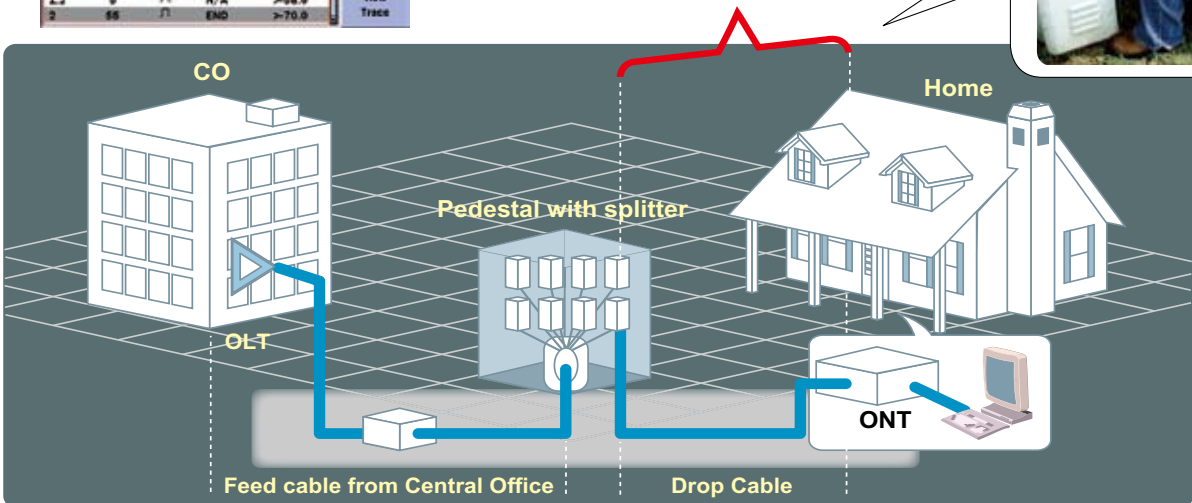

*1: At actual work, Only use the 780 nm OTDR after confirming that there is no effect on the customer's communications system. Anritsu cannot guarantee in advance that there will be no impact on communications.
*2: Fiber bending loss (attenuation) cannot be detected at the 780 nm wavelength.

Specifications

Dimensions and Mass	190 (W)mm x 96 (H)mm x 18 (D)mm (7.5"x3.8"x1.9") (Including mainframe and module) Weight (including mainframe, module and battery): <800 g (<2 lbs.)
Display	4.3 inch TFT-LCD (480x272, with backlight, transparent type)
Interface	USB 1.1, Type A x1 (memory), Type B x 1 (USB mass storage)

Model	MU909011A, A1, A2, A3-052/062	MU909011A, A1, A2, A3-050/060
Wavelength*1	780±20 nm	1550±30 nm
Fiber Type	10/125 um SMF (ITU-T G.652)	
Distance Range	1.0 km (3,000 ft) or 2.5 km (8,000 ft), MU909011A set automatically	
Pulse width	<10 ns	
Dynamic Range*2	>7.0 dB	
Deadzone	Fresnel: <1 m *3, Backscatter: <5 m *4	
Sampling Resolution	5 cm (Distance range 1.0 km), 10 cm (Distance range 2.5 km) (IOR=1.50000)	
Sampling Points	20001 (Distance range 1.0 km), 25001 (Distance range 2.5 km)	
Data Storage	Internal memory:40 MB (up to 2000 traces), External (USB): up to 30,000 traces with 1GB	
IOR Setting	1.3000 to 1.7000 (0.0001 steps)	
Units	ft, m	
Fiber Event Analysis	Automatic, displayed in table format based on user defined PASS/FAIL thresholds	
Loss Modes	2 point loss, dB/km	
OTDR Trace Format	Telcordia universal (.SOR), issue 2 (SR-4731)	
Other Functions	Integrated launch fiber: 10 m (30 ft)	
	Connection check: Automatic check of OTDR to FUT connection quality	
	Live Fiber detect : verifies presence of communication light in optical fiber	
	Real time sweep: <1sec (typical)	
Integrated Optical Power Meter (Optional)	Wavelength 1550 nm, same port as OTDR	
	Power range:-5 to -45 dBm, Accuracy:±0.5 dB *5, Maximum input:+10 dBm	
Visible Laser Diode (Optional) *8, *1	Connector: 2.5 mm universal, Wavelength: 650±15 nm, Output: 0±3 dBm Laser safety: IEC Pub 60825-1: 2001 Class3R: MU909011A1/A3-050/060/052/062*9 (CW)	
Power Supply	9 VDC, 100 to 240 VAC, Allowable input voltage range: 90 to 264 V, 50/60 Hz	
Battery	NiMH, Operating Time: 3.5 hours (typical)*6, Recharge Time:<3 h*7	
Environmental Conditions	Operation: 0° to +50°C, <80% (non-condensing) *8, Storage: -20° to +60°C	
	Vibration: MIL-T-28800E Class 3, Dust and Drip proof: IP 51	
EMC	EN61326	
Laser safety	IEC Pub 60825-1: 2001 Class1: MU909011A/A1/A2/A3-050/060/052/062*8	

*1: @25°C

*2: Averaging: 10 seconds, SNR=1, 25°C

*3: Return loss 45 dB, Deviation ±0.5 dB, 25°C

*4: Return loss: 45 dB, 25°C (1.5 dB down from the peak of Fresnel)

*5: CW input, -20 dBm @ 1550 nm, 25°C

*6: back light low, sweeping halted at 25°C

*7: 10° to +30°C, Power OFF


*8: 10° to +30°C (During Recharging battery, Power OFF)

*9: Class 3R of IEC 60825-1 and the 21CFR1040.10.

*10: Class 1 of IEC 60825-1 and the 21CFR1040.10.



THIS PRODUCT COMPLIES WITH 21 CFR 1040.10 AND 1040.11 EXCEPT FOR DEVIATIONS PURSUANT TO LASER NOTICE NO 50 DATED JULY 26 2001



THIS PRODUCT COMPLIES WITH 21 CFR 1040.10 AND 1040.11 EXCEPT FOR DEVIATIONS PURSUANT TO LASER NOTICE NO 50 DATED JULY 26 2001

Ordering Information

1) Select Mainframe

Includes battery pack, AC charger/adaptor, standard soft case and strap

Model/Order No.	Description
MT9090A	Mainframe with color LCD

2) Select Module

Includes printed operation manual

Model/Order No.	Description
MU909011A	Base module
MU909011A1	Base module with Visible Fault Locator
MU909011A2	Base module with Power Meter
MU909011A3	Base module with Visible Fault Locator and Power Meter

3) Select Module Option

Model/Order No.	Description	Model/Order No.	Description
MU909011A-050	SMF 1550 nm UPC	MU909011A-052	SMF 780 nm UPC
MU909011A1-050	SMF 1550 nm UPC, Visible Fault Locator	MU909011A1-052	SMF 780 nm UPC, Visible Fault Locator
MU909011A2-050	SMF 1550 nm UPC, Power Meter	MU909011A2-052	SMF 780 nm UPC, Power Meter
MU909011A3-050	SMF 1550 nm UPC, Visible Fault Locator, Power Meter	MU909011A3-052	SMF 780 nm UPC, Visible Fault Locator, Power Meter
MU909011A-060	SMF 1550 nm APC	MU909011A-062	SMF 780 nm APC
MU909011A1-060	SMF 1550 nm APC, Visible Fault Locator	MU909011A1-062	SMF 780 nm APC, Visible Fault Locator
MU909011A2-060	SMF 1550 nm APC, Power Meter	MU909011A2-062	SMF 780 nm APC, Power Meter
MU909011A3-060	SMF 1550 nm APC, Visible Fault Locator, Power Meter	MU909011A3-062	SMF 780 nm APC, Visible Fault Locator, Power Meter

4) Select Connector Adapter

One adapter included at no charge – must be added as a separate line item.

Model/Order No.	Connector Type
MU909011A-033	LC (UPC: Models -050 and -052 only)
MU909011A-037	FC (UPC: Models -050 and -052 only)
MU909011A-038	ST (UPC: Models -050 and -052 only)
MU909011A-039	DIN (UPC: Models -050 and -052 only)
MU909011A-040	SC (UPC: Models -050 and -052 only)
MU909011A-025	FC-APC (APC: Models -060 and -062 only)
MU909011A-026	SC-APC (APC: Models -060 and -062 only)

5) Select Accessories

Must be added as separate line items.

Model/Order No.	Description
G0203A	Replacement AC Adaptor
G0202A	Replacement NiMH battery pack
B0601A	Standard soft case
Z1023A	Strap
B0600A	Deluxe soft case for MT9090A
J1042	Car plug cord
W2988AE	Hardcopy MT9090A/MU909011A Operation manual
MU909011A/A1/A2/A3-ES210	12 month extended warranty (total 2 years warranty)
MU909011A/A1/A2/A3-ES310	24 month extended warranty (total 3 years warranty)

6) Replacement Adaptors

Must be added as separate line items.

Model/Order No.	Description	Model/Order No.	Description
J1270	LC (UPC: Models -050 and -052 only)	J0618E	DIN (UPC: Models -050 and -052 only)
J0617B	FC (UPC: Models -050 and -052 only)	J0619B	SC (UPC or APC: all models)
J0618D	ST (UPC: Models -050 and -052 only)	J0739A	FC (APC: Models -060 and -062 only)



Standard soft case



Deluxe soft case

Full Network Master operation without removal from the case. Providing excellent protection for use in harsh conditions.

MU909020A OCA Module for MT9090A

Compact CWDM channel analyzer to verify power levels, drift and channel presence of CWDM networks.



MT9083A ACCESS Master Mini-OTDR

All in one test tool for fiber construction and maintenance.



CMA5 Basic Power Meter and Light Source

The CMA 5 series power meters and light sources are basic, economical tools for loss budget testing in optical networks.



CMA50 Loss Test Sets

Anritsu's CMA50 series loss test sets are designed for attenuation and throughput measurements of fiber optic links. Key features include automated, bi-directional testing, ORL, data storage, referencing and auto-wavelength switching.



Anritsu

Specifications are subject to change without notice.

Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

• U.S.A.

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27 - 1 Andar
01327-010-Paraisópolis, São Paulo-Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• U.K.

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

16/18 avenue du Québec-SILIC 720
91961 COURTABOEUF CEDEX, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.p.A.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

• Sweden

Anritsu AB

Borgafjordsgatan 13, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kirkebjerg Allé 90, DK-2605 Brøndby, Denmark
Phone: +45-72112200
Fax: +45-72112210

• Spain

Anritsu EMEA Ltd.

Oficina de Representación en España
Edificio Veganova
Avda de la Vega, n° 1 (edf 8, pl 1, of 8)
28108 ALCOBENDAS - Madrid, Spain
Phone: +34-914905761
Fax: +34-914905762

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu Pte. Ltd.

India Branch Office

Unit No. S-3, Second Floor, Esteem Red Cross Bhavan,
No. 26, Race Course Road, Bangalore 560 001, India
Phone: +91-80-32944707
Fax: +91-80-22356648

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong
Phone: +852-2301-4980
Fax: +852-2301-3545

• P.R. China (Beijing)

Anritsu Company Ltd.

Beijing Representative Office

Room 1515, Beijing Fortune Building,
No. 5, Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 10004, P.R. China
Phone: +86-10-6590-9230
Fax: +86-10-6590-9235

• Korea

Anritsu Corporation, Ltd.

8F Hyunju Building, 832-41, Yeoksam Dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

• Australia

Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817