




160 School House Road, Souderton, PA 18964-9990 USA
Phone 215-723-8181 • FAX 215-723-5688

MODELS 50W1000B
M1 M2 M3 M4
50 WATTS CW
1 - 1000 MHz

The Model 50W1000B is a portable, self-contained, air-cooled, broadband, solid state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in the high power stages to lower distortion and improve stability. The 50W1000B, when used with an RF sweep generator, will provide a minimum of 50 watts of swept power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 50W1000B is protected from RF input overdrive by limiting diodes and an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF Amplifier stages are protected from over temperature by removing the DC voltage to them if an over temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions when an over temperature, power supply, or amplifier fault has occurred. The unit can be returned to operate when the condition has been cleared. The 50W1000B includes digital control for both local and remote control of the amplifier. This 8-bit RISC microprocessor controlled board provides both IEEE-488 (GPIB) and asynchronous, full duplex RS-232 control of all amplifier functions.

50W1000B TYPICAL POWER OUTPUT

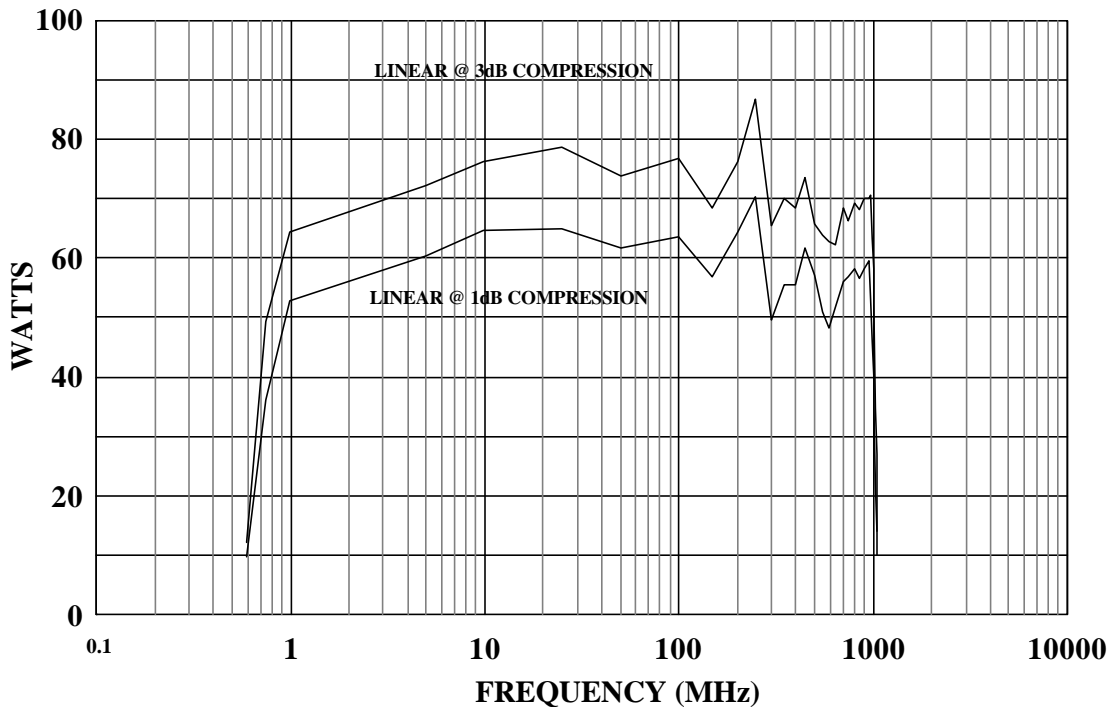

SPECIFICATIONS
Model 50W1000B

RATED OUTPUT POWER	50 watts minimum
INPUT FOR RATED OUTPUT	1.0 milliwatt maximum
POWER OUTPUT @ 3dB COMPRESSION	
<i>Nominal</i>	70 watts
<i>Minimum</i>	50 watts
POWER OUTPUT @ 1dB COMPRESSION	
<i>Nominal</i>	55 watts
<i>Minimum</i>	40 watts
FLATNESS	±1.0 dB typical ±1.5 dB maximum
FREQUENCY RESPONSE	1-1000 MHz instantaneously
GAIN (at maximum setting)	47 dB minimum
GAIN ADJUSTMENT (Continuous Range)	20 dB minimum (4096 steps remote)
INPUT IMPEDANCE	50 ohms, VSWR 2.0:1 maximum
OUTPUT IMPEDANCE	50 ohms, nominal
MISMATCH TOLERANCE *	100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.
MODULATION CAPABILITY	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal
HARMONIC DISTORTION	Minus 20 dBc maximum at 50 watts
THIRD ORDER INTERCEPT POINT	57 dBm typical
PRIMARY POWER (selected automatically)	90-132, 180-264 VAC 50/60 Hz, single phase 600 watts maximum
REMOTE INTERFACES	IEEE-488, RS-232
CONNECTORS	
RF	Type N female
REMOTE CONTROL	
IEEE-488	24 pin female
RS-232	9 pin Subminiature D (female)
REMOTE INTERLOCK	15 Pin Subminiature D
COOLING	Forced air (self contained fans)
WEIGHT	See Model Configurations
SIZE (WxHxD)	See Model Configurations
* See Application Note #27	

MODEL CONFIGURATIONS

MODEL NUMBER	RF INPUT	RF OUTPUT	WEIGHT	WEIGHT
50W1000B	<i>Type N female on front panel</i>	<i>Type N female on front panel</i>	25.9 kg (57.0 lb)	50.3 x 20.3 x 45.7 cm 19.8 x 8.0 x 18.1 in
50W1000BM1	<i>Type N female on rear panel</i>	<i>Type N female on rear panel</i>	25.9 kg (57.0 lb)	50.3 x 20.3 x 45.7 cm 19.8 x 8.0 x 18.1 in
50W1000BM2	<i>Same as 50W1000B with enclosure removed for rack mounting</i>		16.4 kg (36.0 lb)	48.3 x 17.8 x 46.0 cm 19.0 x 7.0 x 18.1 in
50W1000BM3	<i>Same as 50W1000BM1 with enclosure removed for rack mounting</i>		16.4 kg (36.0 lb)	48.3 x 17.8 x 46.0 cm 19.0 x 7.0 x 18.1 in
50W1000BM4	<i>Same as 50W1000BM2 with gain control removed</i>		16.4 kg (36.0 lb)	48.3 x 17.8 x 46.0 cm 19.0 x 7.0 x 18.1 in