


100

NETWORK TESTING

ACCESS OTDR

AXS-100

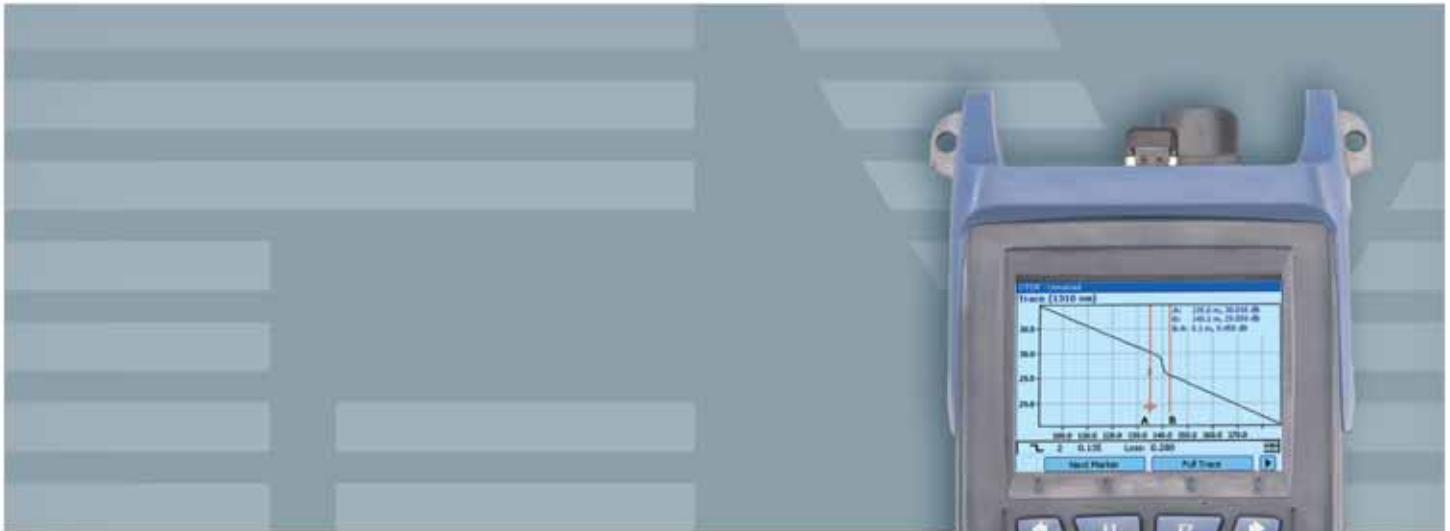

Compact, lightweight handheld OTDR optimized for access/FTTx network testing

- **Top user-friendliness:** one-button testing, combined with EXFO's proprietary FTTx software package (macro bend/fault finder, pass/fail indicators)
- **Multiple options,** including power meter, visual fault locator (VFL), fiber inspection probe, printer and IP testing
- **Fault Finder mode,** for quick identification/location of a fiber break
- **Complete connectivity flexibility:** USB stick compatibility and USB cable data download via ActiveSync*
- **Advanced TFT transfective color display,** for assured legibility under direct sunlight or in other demanding outside conditions
- **Handheld,** small, lightweight unit: 1 kg (2.2 lb)
- **Built-in ruggedness** for outside-plant usage
- **Troubleshooting option,** enabling in-service, out-of-band network testing

* Microsoft ActiveSync™



www.exfo.com

Telecommunications Test and Measurement

EXFO

EXPERTISE REACHING OUT

The Definitive Handheld OTDR for FTTx Testing

EXFO's AXS-100 Access OTDR combines the industry's leading OTDR technology with power meter functionalities in one powerful handheld unit. Optimized for testing passive optical networks (PON) within FTTx architectures, it offers several wavelength configurations and a wide range of options, for first-class flexibility. Use it at the optical network terminal (ONT), drop terminal or fiber distribution hub (FDH) for FTTH distribution (F2) fiber characterization, troubleshooting and fault locating.


Access Networks—Bringing New Testing Requirements

FTTx networks are becoming a worldwide solution for offering high-speed triple-play services, as carriers must ensure the same level of reliability and availability as that of traditional twisted-pair copper-based access networks.

Increased fiber deployment within access networks brings new requirements and the need for highly efficient testing strategies. As most of the work is performed in ever-changing outside conditions (cold/warm/hot, day/night, etc.), working space is often limited and access technicians are getting acquainted with the latest FTTx technologies, choosing a simple, reliable testing tool is key.




High-Speed Access Technologies

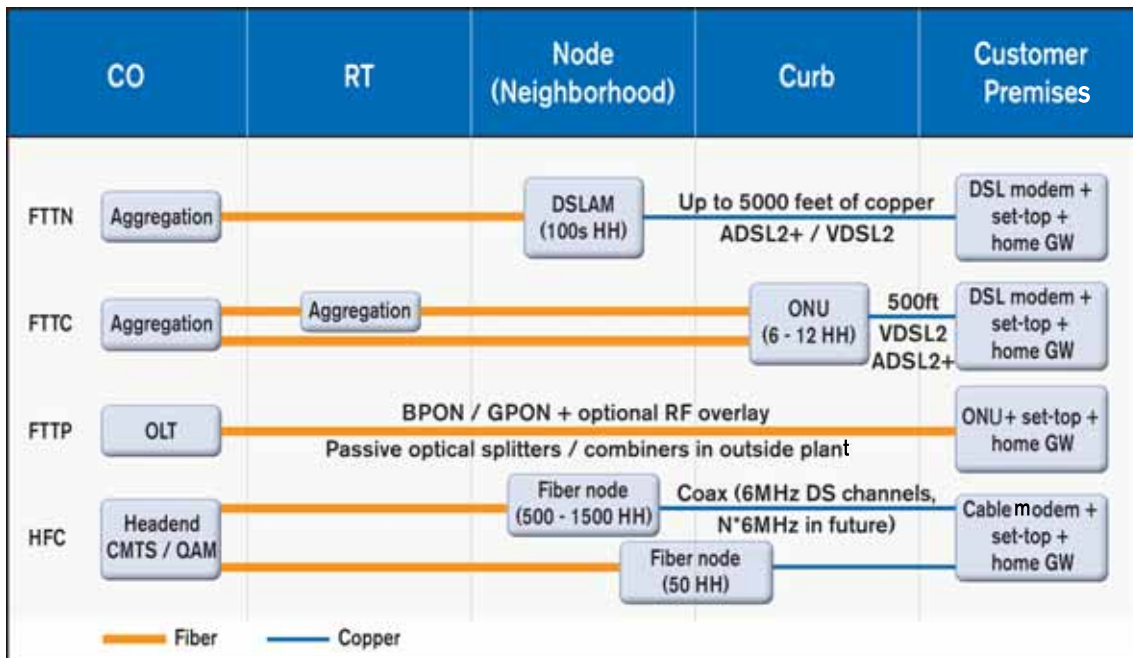


FTTx Functionalities and Software Package

The AXS-100 Access OTDR makes testing an FTTx network an easy task. Simply connect the fiber, press FasTrace, and view the result. This handheld unit provides unparalleled ease of use, even for technicians with little background in optical/OTDR testing. Its proprietary FTTx software package enables you to view all results at once and easily assess link status. Without further analysis, you can view fiber length data and detailed pass/fail status, and even verify the presence of macrobendings.

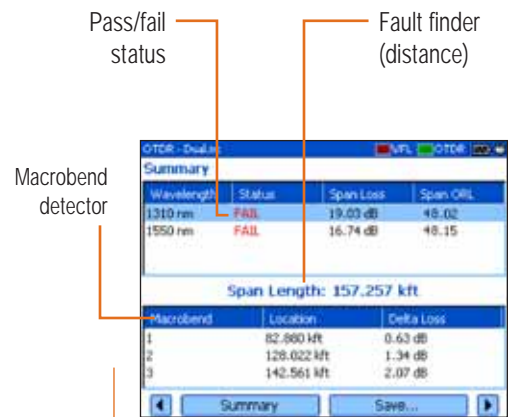

With its Auto, Manual, Fault Finder and real time modes, the AXS-100 is really the FTTx test instrument of choice.

The AXS-100's unique software functionalities provides in-depth results at a glance.

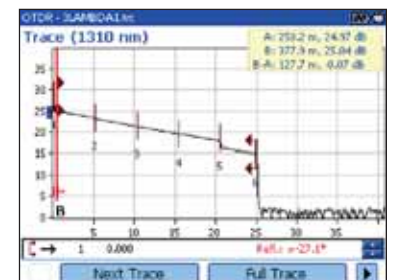

The more experienced user can also use the AXS-100's OTDR trace and event features.

Flexible Configurations and Options



Multiple Wavelengths, Large Storage Capacity

Choose the OTDR model that meets your wavelength requirements: 1550 nm, 1310/1550 nm, 1550/1625 nm and filtered 1625 nm, for in-service FTTH troubleshooting. What's more, the AXS-100 lets you save up to 500 traces.

In-Service PON Troubleshooting Option

The AXS-100 Access OTDR is specifically designed for in-service PON troubleshooting. It features an optional dedicated port for testing at 1625 nm incorporating a filter that rejects all unwanted signals (1310, 1490 and 1550 nm) that could contaminate the OTDR measurement. The filter only lets through the 1625 nm OTDR signal, ensuring accurate OTDR measurements.


In-service OTDR troubleshooting of optical fiber does not interfere with the normal operation and expected performance of the information channels. EXFO's AXS-100 does not interfere with the CO's laser transmitters, as it uses an out-of-band wavelength, as per the ITU-T L.4¹ (*Maintenance Wavelength on Fibers Carrying Signals*) recommendation.

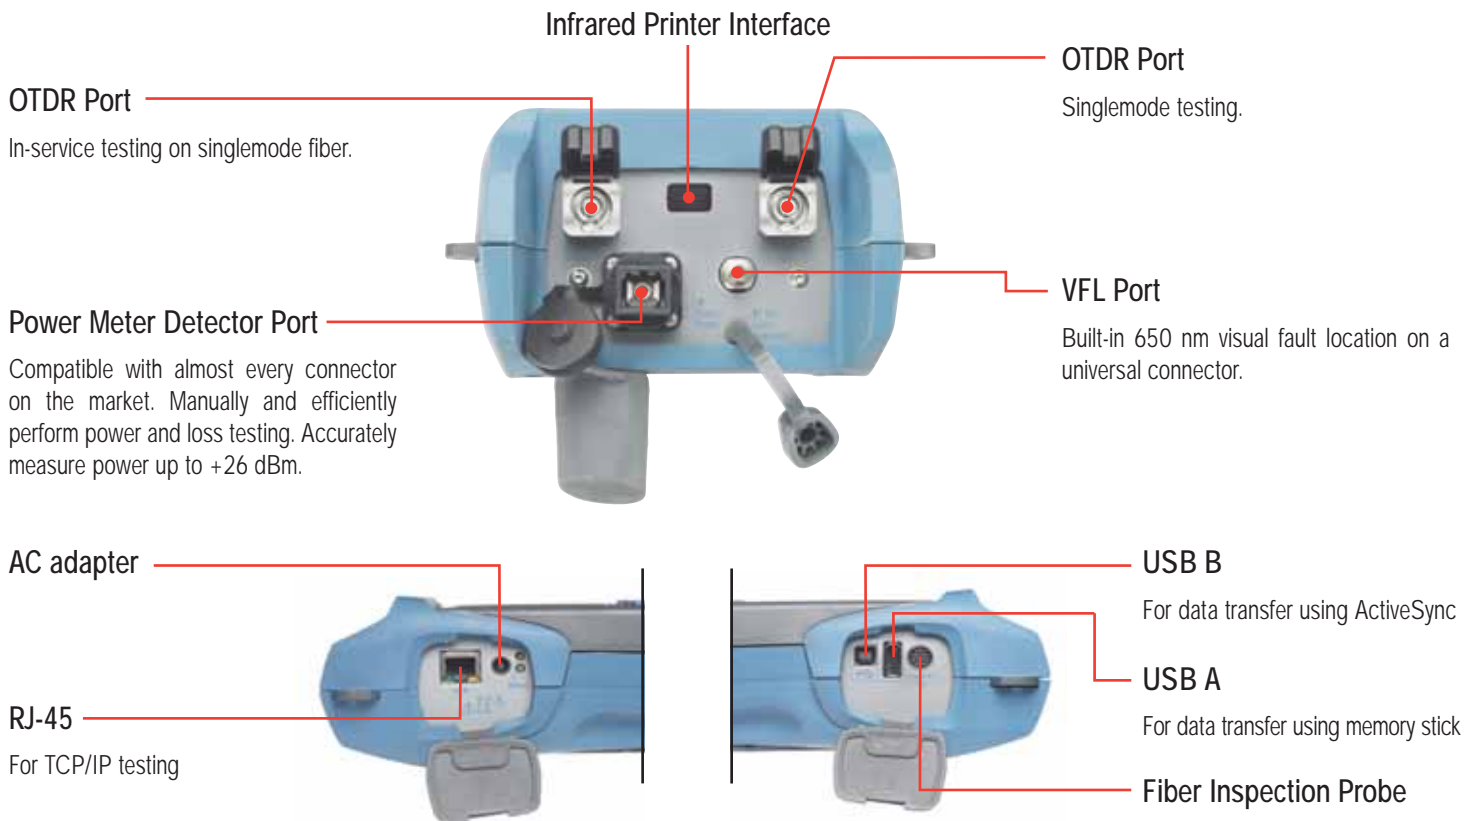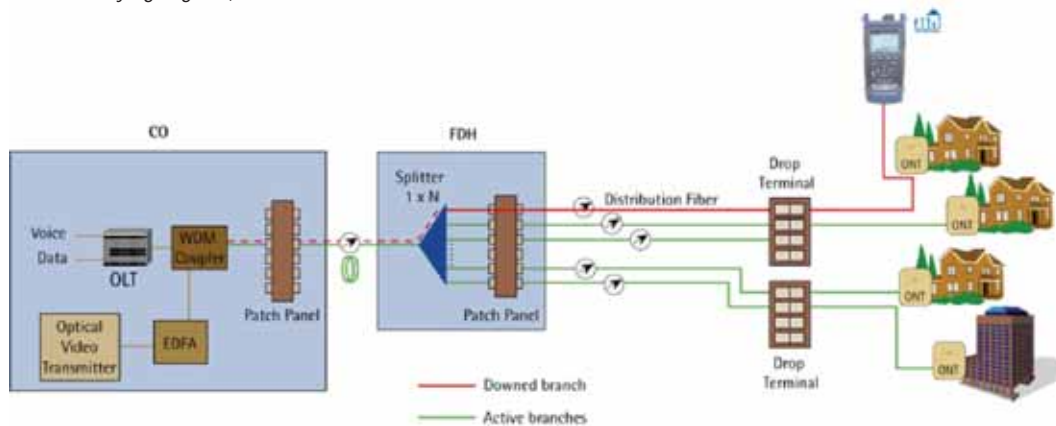

¹ Additional filtering may be required at the transmission equipment.

Fiber Inspection Probe Option

In any optical network, connectors should be kept clean and in good condition—which is not always easy in outside conditions. Using a fiber inspection probe (enabling quick, easy inspection of fiber ends or connectors using the AXS-100's high-resolution display) is the best way to perform this critical connector check.

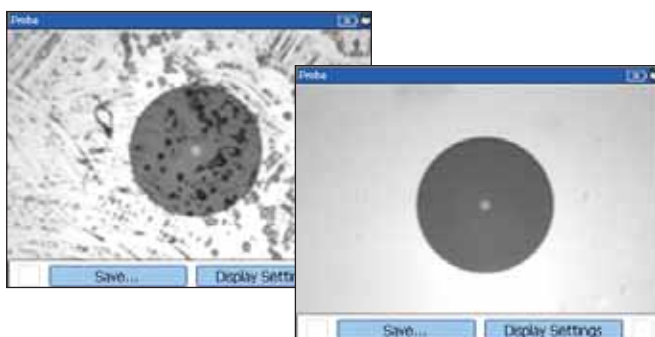

View fiber ends and connector endfaces on the AXS-100's high-resolution display

IP Testing Option

Performing complete access network testing also means testing the delivered service. With the AXS-100's IP testing option, you can perform basic IP verification that will facilitate future troubleshooting operations.

Visual Fault Locator

Ideal for easily identifying macrobend, bad splices or bad connectors. Built-in 650 nm visual fault location on a universal connector.

Power Meter GeX Option

The AXS-100's optional power meter covers the 800 to 1650 nm range, offering a power range of -60 to 26 dBm (GeX 2 mm). It comes with a three-year recommended calibration interval, providing for a very low cost of ownership.

USB Interfaces

Easily transfer your OTDR data files thanks to the AXS-100's two USB ports:

- Main USB port used to interface with a USB stick
- Secondary USB port allowing direct cable download to your PC using ActiceSync

Infrared Interface

Achieve fast, on-the-spot OTDR trace printing by using this standard infrared interface to send your file to any portable printer equipped with an infrared interface.

Fault Finder Option

When working in a central office (CO), it is critical to choose a device that will easily and quickly locate a fault, a simple tool that requires as little manipulation as possible, such as the AXS-100 Access OTDR. Equipped with the Fault Finder mode option, the AXS-100 automatically sets itself up for optimal, quick and reliable detection of the distance to the end of the fiber.



Flexible Configurations and Options (Cont'd)

SPECIFICATIONS¹*

OTDR

Dynamic range ² (dB), (1310/1550/1625) 10 μ s, typ. 3 min	27/25/24
Pulse width (ns)	10, 30, 100, 275, 1000, 2500, 10 000
Event dead zone ³ (-45 dB), typ. (m)	2.5
Attenuation dead zone ³ (-45 dB), typ. (m)	12/13/13
Linearity (dB/dB)	\pm 0.05
Loss threshold (dB)	\pm 0.05
Loss resolution (dB)	0.01
Sampling resolution (m)	0.16
Sampling points	Up to 30 000
Distance uncertainty ⁴ (m)	\pm (1 + 0.005 % x distance + sampling resolution)
Distance range (km)	1.25 to 160
Typical real-time refresh (s)	0.5
Memory capacity	500 traces
Measurement time	User-defined
Visual fault locator (optional)	Laser, 650 nm \pm 10 nm CW Typical P _{out} in 62.5/125 μ m: 3 dBm (2 mW)

LASER SAFETY



21 CFR 1040.10 AND IEC 60825-1:1993+A2:2001
CLASS 1M WITHOUT VFL OPTION
CLASS 3R WITH VFL OPTION

Optional Power Meter⁵

Calibrated wavelengths (nm)	850, 1300, 1310, 1490, 1550, 1625, 1650
Power range (dBm)	-64 to 26 (GeX 2 mm)
Uncertainty	\pm 5 % \pm 0.4 nW (up to 5 dBm)
Display resolution (dB)	0.01 (-54 dBm to P _{max}) 0.1 (-54 dBm to -64 dBm) 1 (-64 dBm to min)
Tone detection (Hz)	270/1000/2000

General Specifications

Size (H x W x D)	25.0 cm x 12.5 cm x 7.5 cm (9 7/8 in x 4 15/16 in x 3 in)
Weight	1 kg (2.2 lb)
Temperature	operating: -10 °C to 50 °C (14 °F to 122 °F) storage: -40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity	0 % to 95 % non-condensing
Power	Li-ion batteries (3 hours)
Warranty (years)	1

Notes

- All specifications valid at 23 °C \pm 2 °C (73.4 °F \pm 3.6 °F) with an FC/PC connector, unless otherwise specified.
- Typical dynamic range with longest pulse and three-minute averaging at SNR = 1.
- Typical dead zone for singlemode reflectance below -45 dB, using a 10 ns pulse.
- Does not include uncertainty due to fiber index.
- At 23 °C \pm 1 °C, 1550 nm and with FC connector. With OTDR in idle mode, battery operated.

* These specifications are preliminary.

ORDERING INFORMATION

AXS-100-XX-XX-XX-XX-XX-XX-XX-XX-XX

Model

- AXS-100-003B = Access OTDR 1550 nm, 25 dB
- AXS-100-023B = Access OTDR 1310/1550 nm, 27/25 dB
- AXS-100-034B = Access OTDR 1550/1625 nm, 25/24 dB
- AXS-100-000 = None

Connector

- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC, narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000
- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/AG
- EI-EUI-89 = UPC/FC, narrow key
- EI-EUI-90 = UPC/ST
- EI-EUI-91 = UPC/SC
- EI-EUI-95 = UPC/E-2000

Second port

- 00 = None
- 04B = Filtered 1625 nm

Second connector

- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC, narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000
- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/AG
- EI-EUI-89 = UPC/FC, narrow key
- EI-EUI-90 = UPC/ST
- EI-EUI-91 = UPC/SC
- EI-EUI-95 = UPC/E-2000

Power meter

- 00 = Without power meter
- PM = With power meter

Connector adapter

- FOA-12 = Biconic
- FOA-14 = D4, D4/PC
- FOA-16 = SMA/906
- FOA-22 = FC, FC (PC/SPC/UPC/APC), NEC-D3
- FOA-28 = DIN 47256 (LSA): DIN 47256 (PC/APC)
- FOA-32 = ST, ST (PC/SPC/UPC)
- FOA-40 = Diamond HMS-0, HFS-3 (3.5 mm)
- FOA-54 = SC (PC/SPC/UPC/APC)
- FOA-76 = FSMA HMS-10/AG, HFS-10/AG
- FOA-78 = Radiall EC
- FOA-84 = Diamond HMS-10, HFS-13
- FOA-96B = E-2000/APC
- FOA-98 = LC
- FOA-99 = MU

VFL

- 00 = Without visual fault locator
- VFL = With visual fault locator

Probe

- FP = Probe option
- FP1 = Probe connector cable and 200X probe
- FP5 = Probe connector cable and 200X/400X

Note

1. Also available is a set of software options.

Example: AXS-100-023B-EA-EUI-89-04B-EI-EUI-89-PM-FOA-22-VFL-FP1-SK123

Software summary kit¹

- SK1 = Smart Kit including macrobending detection, pass/fail and fault finder
- SK2 = IP testing
- SK3 = Fiber Inspection Probe software
- SK123 = Smart Kit (SK1), IP testing (SK2), Fiber Inspection Probe software (SK3)

Find out more about EXFO's extensive line of high-performance portable instruments by visiting our website at www.exfo.com.

Rugged Handheld Solutions	Optical Fiber	DWDM Test Systems	Transport/Datacom
<ul style="list-style-type: none"> OLTS Power meter Light source Talk set 	<ul style="list-style-type: none"> OTDR OLTS ORL meter Variable attenuator 	<ul style="list-style-type: none"> OSA PMD analyzer Chromatic dispersion analyzer 	<ul style="list-style-type: none"> SONET/DSn (DS0 to OC-192c) SDH/PDH (64 kb/s to STM-64c) 10/100 and Gigabit Ethernet Fibre Channel 10 Gigabit Ethernet

Corporate Headquarters > 400 Godin Avenue, Vanier (Quebec) G1M 2K2 CANADA | Tel.: 1 418 683-0211 | Fax: 1 418 683-2170 | info@exfo.com

Toll-free: 1 800 663-3936 (USA and Canada) | www.exfo.com

Region	Address	City	Tel.	Fax
EXFO America	3701 Plano Parkway, Suite 160	Plano, TX 75075 USA	Tel.: 1 800 663-3936	Fax: 1 972 836-0164
EXFO Europe	Le Dynasteur, 10/12 rue Andras Beck	92366 Meudon la Forêt Cedex FRANCE	Tel.: +33.1.40.83.85.85	Fax: +33.1.40.83.04.42
EXFO Asia-Pacific	151 Chin Swee Road, #03-29 Manhattan House	SINGAPORE 169876	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	No.88 Fuhua, First Road Central Tower, Room 801, Futian District	Shenzhen 518048, CHINA	Tel.: +86 (755) 8203 2300	Fax: +86 (755) 8203 2306

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. All of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.exfo.com/recycle. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor. For the most recent version of this spec sheet, please go to the EXFO website at <http://www.exfo.com/specs>. In case of discrepancy, the Web version takes precedence over any printed literature.

