


Tektronix 2784 Spectrum Analyzer

Features

- 100 Hz to 40 GHz Coaxial Frequency Range
- External Waveguide Mixer Support to 325 GHz
- Full-range Sweep from 0 Hz to 40 GHz
- Resolution BW from 3 Hz to 10 MHz in a 1, 3, 10 Sequence
- 100 dB Display Dynamic Range
- Phase Noise Performance as Low as -105 dBc/Hz at 10 kHz Offset up to 21 GHz
- Built-in Math Functions
- Intelligent Markers/Signal Processing: Search, Sort, and Mark CW, Pulse, or All Signals
- Occupied Bandwidth Mode
- Signal Tracking
- Built-in 100 Hz to 1.2 THz Frequency Counter with Frequency Measurement Accuracy of ≤ 400 Hz at 40 GHz
- Fully Programmable with Two GPIB Interfaces
- Built-in Automation
- Macro Downloading to 40 K of NVRAM
- Store up to 20 Front-panel Key Sequences
- Store up to 20 Waveforms with Readout Information
- Store up to 20 Instrument States

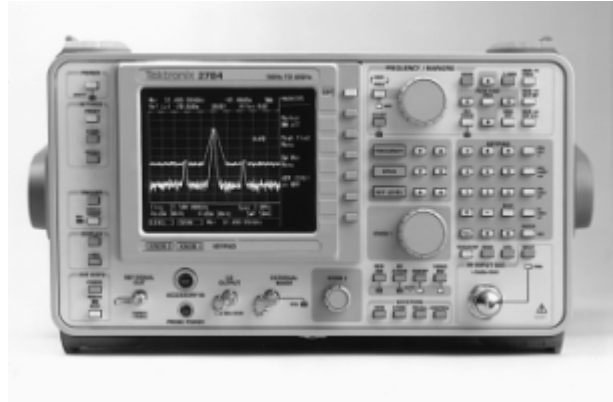

Applications

- Digital Microwave Radio
- Satellite Communication
- Microwave and RF Source Design
- Avionics
- Millimeter Wave R&D



Tektronix Measurement products are manufactured in ISO registered facilities.



This product complies with IEEE Standard 488.1-1987, and with Tektronix Standard Codes and Formats.

For additional information or to order, contact your local Tektronix representative.

Characteristics

Except as noted, the following tables of electrical characteristics and features apply after a 30-minute warm-up.

Frequency Related

Frequency Range: 100 Hz to 40 GHz in coax, to 325 GHz with external waveguide mixers.

Frequency Readout Accuracy:

$$\pm[F(RE + 10^{-10})] + D + (M \times N)$$

F = center frequency.

RE = reference error.

D = 2% of span or 20% of resolution bandwidth, whichever is greater.

M > 2 MHz span = (100N) kHz.

M ≤ 2 MHz span = (10N) Hz.

N = L.O. harmonic.

Counter:

Range: 100 Hz to 1.2 THz.

Resolution: Selectable from 1 Hz to 1 GHz

$$\pm[F(RE + 10^{-10})] + 15N \text{ Hz} + 1 \text{ LSD.}$$

Delta Count Accuracy (S/N ≥ 20 dB):

$$\pm[\Delta F (RE + 10^{-10})] + 30N \text{ Hz} + 2 \text{ LSD.}$$

F = counter frequency.

RE = reference error.

N = L.O. harmonic.

LSD = least significant digit.

Frequency Reference Accuracy:

Aging < 1 × 10⁻⁶/year < 7 × 10⁻⁹/day. Drift < 5 × 10⁻⁷ over instrument temperature range of -10 to +40 degrees C.

Frequency Span:

Range: 0, 10 Hz to 40 GHz in coax to 600 GHz in external mixer bands.

Resolution: ≥ 100 Hz, selectable in 1% increments.

Accuracy: > 2 MHz, ±2%, 1 kHz to 2 MHz, ±1%, 100 Hz to 1 kHz, ±7%.

Resolution Bandwidth (6 dB):

3 Hz to 10 MHz in 1, 3, 10 sequence.

Accuracy: 10 MHz, 3 MHz ±20%, 1 MHz to 100 Hz ±15%, 30 Hz, 10 Hz ±20%, 3 Hz +50%, -10% (typical).

Selectivity (-60 dB/-6 dB): < 10:1.

Shape: Synchronously tuned, six-pole filters.

Video Bandwidth: Range: 0.03 Hz to 7 MHz (Nominal).

Stability: Residual FM: 32 MHz span, 1N Hz p-p over one second; > 2 MHz span, 25N kHz p-p over 500 ms. Drift (after one hour warm-up): 32 MHz span 5N kHz/minute of sweep time, > 2 MHz span 5N kHz/minute of sweep time (typical).

Notes: N=L.O. Harmonic. Errors due to drift are not cumulative from sweep to sweep.

Resolution Filter Bandwidths:

6 dB (Specified)	3 dB (Typical)	Noise (Typical) Random	Impulse (Typical)
3 Hz	2.1 Hz	2.3 Hz	3 Hz
10 Hz	6.9 Hz	7.6 Hz	10 Hz
30 Hz	21 Hz	23 Hz	30 Hz
100 Hz	69 Hz	76 Hz	100 Hz
300 Hz	206 Hz	227 Hz	300 Hz

1000 Hz	686 Hz	758 Hz	1 kHz
3 kHz	2.1 kHz	2.3 kHz	3 kHz
10 kHz	6.9 kHz	7.6 kHz	9 kHz
30 kHz	21 kHz	23 kHz	30 kHz
100 kHz	69 kHz	76 kHz	100 kHz
300 kHz	206 kHz	227 kHz	270 kHz

1 MHz	686 kHz	758 kHz	720 kHz
3 MHz	2.1 MHz	2.3 MHz	2.5 MHz
10 MHz	6.9 MHz	7.6 MHz	4.5 MHz

Spectral Purity:

Noise Sidebands

dBc/Hz		Center Frequency			
Freq. Offset	Spec. 6.5 GHz	Spec. 12 GHz	Typical 21 GHz	Typical 33 GHz	Typical 40 GHz
100 Hz	-85	-80	-75	-70	-65
1 kHz	-97	-95	-90	-86	-81
10 kHz	-105	-105	-105	-97	-94

100 kHz	-105	-105	-105	-97	-94
1 MHz	-112	-112	-112	-102	-99

Amplitude Related

Maximum Amplitude Range: -135 dBm to +30 dBm.

Displayed Average Noise Level (10 Hz RBW, 0 dB attn.):

Frequency	Level
100 Hz to 50 kHz	-78 dBm
50 kHz to 10 MHz	-105 dBm
10 MHz to 2.5 GHz	-135 dBm
2.5 GHz to 6.5 GHz	-132 dBm
6.5 GHz to 21.25 GHz	-125 dBm

21.25 GHz to 28 GHz	-120 dBm
28 GHz to 40 GHz	-107 dBm

Using WM782 Waveguide Mixer Series:

(10 Hz RBW)

Band	Frequency	Harmonic No.	Level
A	26.5 to 40 GHz	2/4	-135 dBm
Q	33 to 50 GHz	4	-135 dBm
U	40 to 60 GHz	4	-135 dBm
V	50 to 75 GHz	6	-130 dBm

E	60 to 90 GHz	6	-125 dBm
W	75 to 110 GHz	8	-125 dBm

(typical with 100 Hz RBW)

F	90 to 140 GHz	8	-105 dBm
D	110 to 170 GHz	10	-100 dBm
G	140 to 220 GHz	14	-95 dBm

J	220 to 325 GHz	20	-85 dBm
---	----------------	----	---------

Display Range:

Log amplifier: 100 dB.
Display Law Range - Log: 1 dB/div to 15 dB/div.
Linear: 5 nV/div to 22 V/div.
Square Law: 2 aW/div to 100 W/div.
Reference Level Range: -140 dBm to +30 dBm.
Resolution: 0.1 dB.

Accuracy: Log (measurements marker): 0.2 dB/1 dB incremental, ± 1.5 dB cumulative over 90 dB range, +2/ -3.5 dB cumulative over 100 dB range at self-correcting temp.

Accuracy:

Lin: $\pm 5\%$.
Square Law: $\pm 8\%$.

Frequency Response: (.10 dB RF attenuation) -20 to 30 degrees C.

Frequency Range	Variation
100 Hz to 6.5 GHz	±1.0 dB
6.5 GHz to 28 GHz	±4.0 dB
28 GHz to 33 GHz	±4.5 dB
33 GHz to 40 GHz	±5.0 dB

(Attenuator accuracy over frequency included in frequency response.)

Attenuator:

Range: 0 to 70 dB, 10 dB steps.
Accuracy @ 100 MHz: ±0.5 dB.

IF Gain:

Range: 0 to 140 dB.
Resolution: 0.1 dB.
Accuracy: ±1.0 dB, 0 to 50 dB; ±1.5 dB, 0 to 100 dB; at self-correction temperature.

Gain Variation Between Resolution Filters: (Measured at -20 dBm reference level, 10 dB RF attn., and after two-hour warmup at self-correction temperature).

Frequency:

10 MHz to 30 Hz: 0.5 dB p-p
10 MHz to 10 Hz: 0.75 dB p-p
10 MHz to 3 Hz: 2.0 dB p-p

Reference Level Calibration Error:

±0.25 dB (Ref. level -20 dBm, with respect to -20 reference in 3 MHz RBW at self-correction temperature).

Band Switching Uncertainty: ±1.5 dB referred to 100 MHz reference signal.

Spurious Responses

Spurious Responses: <-80 dBc + 20 Log N except as noted below.

Residual Signals: <-77 dBm, 100 Hz to 10 MHz;

Mixer Level: -30 dBm:

<-70 dBm at 2 MHz with 10 kHz and wider resolution bandwidth;

<-100 dBm, 10 MHz to 6.5 GHz;

<-92 dBm, 6.5 GHz to 21 GHz;

<-82 dBm, 21 GHz to 28 GHz;

<-80 dBm, 28 GHz to 40 GHz.

Maximum Dynamic Range:

Compression-to-Noise: 132 dB (10 MHz to 6.5 GHz);

117 dB (to 28 GHz); 101 dB (to 40 GHz).

Signal-to-Harmonic Distortion: 80 dB (50 MHz to 6.5 GHz);

100 dB (6.5 GHz to 40 GHz).

Signal-to-Intermodulation Distortion: 98 dB (10 MHz to 6.5 GHz);

83 dB (to 28 GHz); 81 dB (to 40 GHz).

1 dB Gain Compression:

100 Hz to 21 GHz: 0 dBm.

21 GHz to 28 GHz: -3 dBm.
28 GHz to 40 GHz: -6 dBm.

Intermodulation Rejection:

Second Order Intercept: >+28 dBm, 1 MHz to 6.5 GHz.
Third Order Intercept: With signal separation <150 MHz and >20 kHz.
Mixer Level -30 dBm: >+15 dBm, 1 MHz to 6.5 GHz, (-90 dBc); >+10 dBm, 6.5 GHz to 28 GHz (-80 dBc).

Second Harmonic Distortion:

Mixer Level: -40 dBm; <-70 dBc, 50 MHz to 6.5 GHz;
<-100 dBc (typical), 6.5 GHz to 40 GHz.

Out of Band Responses for Input Frequencies <35 GHz:

Center Frequency Range		
	100 Hz to 28 GHz	28 to 40 GHz
Image Response	<-65 dBc	<-65 dBc
Harmonic	<-65 dBc	<-55 dBc
Conversions	(typical)	(typical)

Sweep Generator And Triggering

Sweep Generator:

Sweep Speed Range: 200 s to 2 μ s.
Accuracy: \pm 5%, 50 μ s and slower; \pm 10%, 20 μ s and faster.

Triggering: Adjustable trigger level and slope.

Internal: AC coupled; 10 Hz to 1 MHz.
External: DC coupled; 0 Hz to 5 MHz or 0 Hz to 1.5 kHz.
Line: Copy of AC line.

Display Related

Display Type: Liquid Crystal color shutter, 10 x 10 division graticule.

Digital Storage: Maximum Sweep Rate: 10 ms with 10-Bit resolution, 2 ms with reduced horizontal resolution. Vertical Digitizer Uncertainty: \pm 0.4%.

Non-volatile Memory: CMOS battery backed-up RAM, memory retention guaranteed to -10 degrees C. Battery Type: Lithium cells. Battery Life (typical): 1.8 years @ 20 degrees C, 1 year @ 50 degrees C. (Batteries are not used when instrument is connected to power source.) Waveforms: 20 waveforms with screen readouts and labels or date/time stamps. Front-panel Setups: 20 complete front-panel setups. Front-panel Sequences: 20 sequences, 64 keystrokes/sequence. Macros: 40 K of RAM. Instrument Calibration Data: Separate EEPROM.

Inputs and Outputs

RF Input: Frequency Range: 100 Hz to 40 GHz. Coupling: DC. Connector: Planar crown system connector with K compatible and N-type adapters as standard accessories. Impedance: 50 ohms.

VSWR	Center Frequency Ranges			
RF Attn.	100 Hz to 65 GHz	6.5 GHz to 28 GHz	28 GHz to 33 GHz	33 GHz to 40 GHz
≥10 dB	<1.4:1	<1.7:1	<2.0:1	<2.25:1

Maximum Safe Input Power:

AC Average Power: +30 dBm with ≥10 dB attenuation.

Pulse Power: 50 W peak, 1 μs and <0.005 duty factor with ≥50 dB attenuation.

DC: 0 V, <100 mA.

Local Oscillator Emission (at 0 dB RF attenuation): ≤ -75 dBm, 100 Hz to 6.5 GHz; ≤ -65 dBm, 6.5 GHz to 40 GHz.

External Mixer Input (diplexer built in):

Impedance: 50 ohms; VSWR <1.9:1 at 525 MHz and <2.2:1 at 3.525 GHz (typical).

LO Output Power: ≥15 dBm at 8.1 to 17.9 GHz.

LO Output: Provides access to output of 1st LO at +4 dBm (typical).

Reference Signal Out:

Amplitude: -20 dBm.

Amplitude Accuracy: ±0.3 dB.

Frequency: 100 MHz (derived from reference oscillator).

Ref. In/Out:

Impedance: 50 ohms nominal.

Input Frequency: 10 MHz ±5 Hz.

Input Signal Amplitude Range: 0 dBm minimum to +15 dBm maximum.

Output Signal (when selected): Nominally 0 dBm at 10 MHz.

Allowable Phase Noise: ≤ -100 dBc/Hz at 1 Hz offset (without degrading instrument phase noise performance).

Ext. Trig/Horiz: External Trigger input, or external sweep input.

Accessory Connector: 15-Pin connector for external inputs and outputs. Ext. in Display Blanking: Provides external access to CRT beam blanking. Ext. in Display Horizontal and Vertical: Provides external access to real-time channel of the instrument; DC coupled; Vert -5 MHz bandwidth (typical). Sweep Output: Provides copy of analog sweep. Ext. in Video: Provides external access to instrument's video processing system; 7.5 MHz bandwidth (typical). Penlift: TTL level output to lift plotter pen. YIG Coil Tune Voltage and return: Provides external output of the YTO coil tuning voltage and a return path.

Ext. V Out: External display horizontal signal output; jumper selectable between full deflection amplifier signal or the real-time signal.

Ext. H Out: External display horizontal signal output; jumper selectable between full deflection amplifier signal or the real-time signal.

Ext. Z Out: External display blanking signal output.

IF Output:

Frequency: 25 MHz (3 MHz and 10 MHz resolution bandwidth).

Amplitude: 3 dBm nominal (-30 dBm reference level, 0 dB RF attenuation, -30 dBm RF input).
Frequency: 4 MHz (1 MHz or less resolution bandwidth).
Amplitude: +9 dBm nominal (-30 dBm reference level, 0 dB attenuation, -30 dBm RF input).
Impedance: Nominal 50 ohms.
VSWR: $\leq 1.5:1$ (Typical).

External Interface Ports

Two GPIB ports (IEEE Std. 488-1978) are standard.

GPIB Interface:

Port 1: SH1, AH1, T5, L3, SR1. Functions: RLO/RL1, PPO, DC1, DT1, CO.
Port 2: SH1, AH1, T5, L3, SRO, RLO, PPO, DCO, DTO, C1, C2, C3, C27, (CO selectable).

Probe Power: Provides operating voltage for active probes; output voltages are:

pin 1: +5 V $\pm 5\%$ @ 100 mA max
pin 2: ground
pin 3: -15 V $\pm 5\%$ @ 100 mA max
pin 4: +15 V $\pm 5\%$ @ 100 mA max.

Power Requirements:

Input Voltage: 90 to 132 VAC, 47 to 440 Hz, 180 to 250 VAC, 47 to 63 Hz.
Power: at 115 VAC, 60 Hz, 250 W maximum, 2.8 A.
Standby Power: 25 W maximum.
Leakage Current: 3.5 mA maximum.

Environmental Characteristics

(Per MIL-T-28800C, Type III, Class 3, Style C)

Temperature:

Operating: -10 to +55 degrees C.
Nonoperating: -62 to +85 degrees C.

Humidity: 5 cycles per MIL-STD 810D Procedure III (modified).

Altitude:

Operating: 15,000 ft.
Nonoperating: 40,000 ft.

Vibration: Resonant search in all axes from 5 to 15 Hz with displacements up to 0.060 inch, 15 to 25 Hz with displacements up to 0.040 inch, and 25 to 55 Hz with displacements up to 0.020 inch.

Shock: Operating and Nonoperating: Tested to withstand three shocks of 30 g, one-half sine, 11 ms duration each direction along each major axis.

Transit Drop: Tested to withstand eight-inch drops, one per each of six faces and eight corners.

Electromagnetic Interference

MIL-STD 461C Part 4:

Conducted Emissions: CE01 - 60 Hz to 15 kHz, 15 dB relaxation below 2 kHz;
CE03 - 15 kHz to 50 MHz power leads; narrowband and broadband full limits (Navy).

Conducted Susceptibility: CS01 - 30 Hz to 50 kHz power leads, full limits;
CS02 - 50 kHz to 400 MHz power leads, 10 dB relaxation at the IF frequencies;
CS06 - Spike power leads, full limits.

Radiated Emissions: RE01 - 30 Hz to 50 kHz magnetic field, 5 dB relaxation below 1 kHz and 10 dB relaxation from 1 kHz to 50 kHz;
RE02 - 14 kHz to 1 GHz; meets MIL-STD 461C Part 7 to full limits.

Radiated Susceptibility: RS01 - 30 Hz to 50 kHz magnetic field, full limits;
RS02 - magnetic induction, 30 dB relaxation at 60 Hz; 20 dB @ 440 Hz;
RS03 - limited to 1 V/m from 14 kHz to 1 GHz, with 20 dB relaxation at IF frequencies.

VDE: Meets VDE 0871 Class 1B - Regulations for RFI Suppression of High Frequency Apparatus and Installations.

FCC: Meets FCC Part 15 Subpart J Class A - EMI Compatibility.

German RöV: Meets German RöV, X-Ray Decree, Section 5, March 1973.

Physical Characteristics

Dimensions:

Without front cover, handle, or feet.

Width: 327.66 mm (12.90 in.)

Height: 204.47 mm (8.05 in.)

Depth: 472.19 mm (18.59 in.)

With front cover, handle folded back, and feet.

Width: 400.05 mm (15.75 in.)

Height: 213.36 mm (8.05 in.)

Depth: 549.11 mm (21.64 in.)

With front cover, handle fully extended, and feet.

Width: 400.05 mm (15.75 in.)

Height: 204.47 mm (8.05 in.)

Depth: 624.28 mm (24.75 in.)

Net Weight: 20 kg (44 lb.)

With standard accessories, cover, and no manuals

Safety: Meets the following industry safety standards:

CSA Standard C22.2 No. 231 - Electrical and Electronic Measurement and Testing Equipment.

ANSI/ISA S82 - Safety Requirements for Electronic Measuring and Controlling Instrumentation.

IEC 348, 2nd Edition - Safety Requirements for Electronic Measuring Apparatus.

FM - Electrical Utilization Standard Class 3810.

UL 1244, 2nd Edition - Electrical and Electronic Measuring and Testing Equipment.

Ordering Information

2784 Microwave Spectrum Analyzer

Includes: N-male to BNC-female Adapter (103-0045-00); N to Planar Crown Adapter (131-4329-00); 50 ohm SMA Cable (012-0649-00); Line Fuses: 4 A, 125 VAC (159-0319-00); 4 A, 250 VAC (159-0320-00); Power Cord (161-0104-00). Operator's Manual (070-8240-00); Operator's Reference Guide (070-8249-00); Programmer's Manual (070-8241-00); Programmer's Reference Guide (070-8242-00); Installation and Performance Verification Manual (070-8067-00).

Opt. 16: 49X/275X/279X Series GPIB Language

Opt. 18: WM782 Bands Q, U, V, E, and W (frequency coverage from 33-110 GHz)

Opt. 19: WM782 Bands A, U, E, F, G, and J (frequency coverage from 26-325 GHz)

Opt. 20: Utility Software for PC, includes GPIB Card

Opt. 30: Rackmount Adapter (19 in.)

Opt. B1: Service Manual prepared to module level

Opt. B2: Complete set of manuals, including Service Manual

International Power Plug Options

Opt. A1: Universal Euro 220 V, 50 Hz

Opt. A2: United Kingdom 240 V, 50 Hz

Opt. A3: Australian 240 V, 50 Hz

Opt. A4: North American 240 V, 60 Hz

Opt. A5: Switzerland 220 V, 50 Hz

Service Assurance Options

Opt. R2: Adds two years of post-warranty Repair Protection

Software

2784 PC Utility. Order S26UT00.

Active Probes

900 MHz, 1.5 pF/100 kilohm: Order P6201.

4 GHz, 0.4 pF/100 kilohm (Requires 1103 Power Supply): Order P6217.

Power Supply: Order 1103

Cameras/Plotters/Printers

Camera, Low Cost: Order C-9 Opt. 1A and Opt. 20

Plotter, Four Color: Order HC100 Opt. 01

Cart: Order K420

GPIB Cables:

0.5 m. Order 012-1282-00

1 m. Order 012-0991-01

2 m. Order 012-0991-00

4 m. Order 012-0991-02

Waveguide Mixer Cables: Use with WM782 Waveguide Mixers. Order 012-1346-00

GPIB Cards

PC-GPIB Card: IBM PC, AT, and Compatibles. Order S3FG210

AT-GPIB Card: IBM AT Bus (High-speed Card). Order S3FG220

MC-GPIB Card: IBM PS/2 with Microchannel Bus. Order S3FG230

Additional Accessories

EMC Ancillary Devices:

Rackmount Adapter: Order 016-1019-00

Optical-to-electrical Converter: Order SA-42

Service Manual, Module Level. Order 070-8244-00

Transit Case: Order 016-0658-00

Soft Side Case: Order 016-0659-00