



160 School House Road, Souderton, PA 18964-9990 USA  
Phone 215-723-8181 • FAX 215-723-5688

MODEL 2000W1000A  
2000 WATTS CW  
80-1000 MHz

The Model 2000W1000A is a self-contained, air-cooled, broadband, completely solid-state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in all high power stages in the interest of lowering distortion and improving stability. The Model 2000W1000A, when used with a sweep generator, will nominally provide over 2000 watts of RF power.

The Model 2000W1000A is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a graphic display, menu assigned softkeys, a single rotary knob, and four dedicated switches (POWER, STANDBY, OPERATE and FAULT/RESET) to offer extensive control and status reporting capability. The display provides operational presentation of Forward Power and Reflected Power plus control status and reports of internal amplifier status. Special features include a gain control, internal/external automatic level control (ALC) with front panel control of the ALC threshold, pulse input capability and RF output level protection. Also included is an internal RF detector which provides an output for use in self-testing or operational modes.


All amplifier control functions and status indications are available remotely in GPIB / IEEE-488.2 format, and RS-232 fiber optic. The bus interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

Housed in stylish, contemporary equipment racks, the Model 2000W1000A provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, and as a driver for frequency multipliers and higher power amplifiers.

The 2000W1000A consists of two 1000 watt amplifiers which can be operated as independent individual amplifiers and a controller/driver equipment rack.

By simply adding one 1000 watt amplifier and the appropriate combiner along with minor tuning, the 2000W1000A is upgraded to a 3000 watt amplifier with expandability to 4000 watts.

2000W1000A TYPICAL POWER OUTPUT

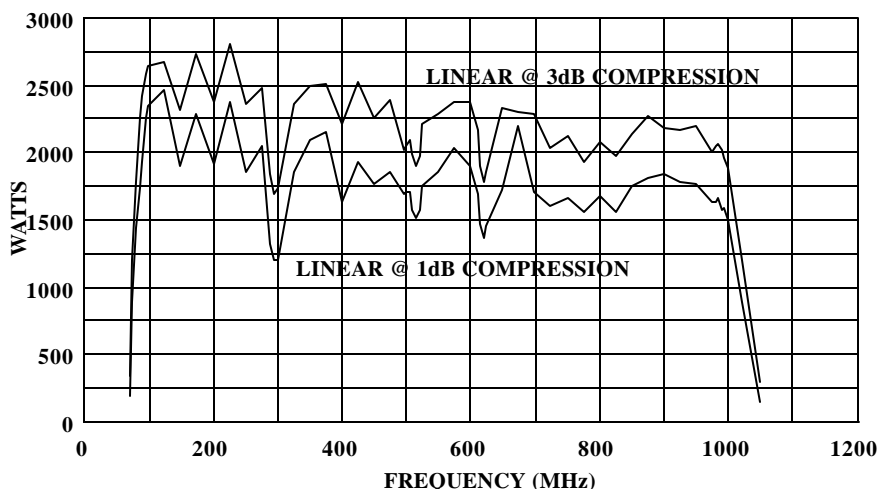

**SPECIFICATIONS**  
**Model 2000W1000A**

RATED OUTPUT POWER .....	1900 watts minimum
INPUT FOR RATED OUTPUT.....	1.0 milliwatts maximum
<b>POWER OUTPUT @ 3dB compression</b>	
Nominal.....	2100 watts
Minimum .....	1650 watts
<b>POWER OUTPUT @ 1dB</b>	
Nominal.....	1750 watts
Minimum.....	1200 watts
FLATNESS .....	±2.5 dB maximum ±0.8 dB with internal leveling
FREQUENCY RESPONSE .....	80-1000 MHz instantaneously
GAIN (at maximum setting).....	63 dB minimum
GAIN ADJUSTMENT (continuous range).....	18 dB minimum
INPUT IMPEDANCE.....	50 ohms, VSWR 2.0:1 maximum
OUTPUT IMPEDANCE .....	50 ohms, VSWR 2.0:1 typical maximum
MISMATCH TOLERANCE * .....	100% of rated power without foldback up to 6.0:1 mismatch above which may limit to 950 watts reflected power. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.
MODULATION CAPABILITY.....	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal
HARMONIC DISTORTION .....	Minus 20 dBc maximum at 1500 watts
THIRD ORDER INTERCEPT POINT.....	70 dBm typical
RF POWER DISPLAY .....	0-2500 watts
PRIMARY POWER (specify voltage).....	200-250 VAC, Delta Connected (4 wire) 360-435 VAC, Wye Connected (5 wire) 50/60 Hz, 3 phase 25 kVA Maximum
<b>CONNECTORS</b>	
RF input.....	Type N female on front panel
RF output.....	Type 1 5/8 EIA on rear
External leveling inputs.....	Type BNC female on front panel
Pulse modulation input.....	Type BNC female on front panel
Detected RF output.....	Type BNC female on front panel
Safety interlock .....	15 pin female subminiature D on rear panel
Remote computer interface.....	24 Pin female IEEE-488.2 (GPIB) connector on rear panel
Remote computer interface (fiber optic).....	ST Conn Tx and Rx RS-232
COOLING.....	Forced air (self contained fans) Enters front and bottom
WEIGHT (approximate) .....	839 kg (1850 lb)
SIZE (WxHxD) (3 cabinets).....	(See outline drawing) 201 x 158 x 160 cm 79 x 62 x 63 in

- See Application Note #27