



160 School House Road, Souderton, PA 18964-9990 USA
Phone 215-723-8181 • FAX 215-723-5688

MODEL 200T2G4
M1, M3
200 WATTS CW
2 - 4 GHz

The Model 200T2G4 is a self contained, forced air-cooled, broadband traveling wave tube (TWT) microwave amplifier designed for applications where instantaneous bandwidth and high gain are required. A reliable 250-watt TWT provides a conservative 200 watts minimum at the amplifier output connector. Stated power specifications are at the fundamental frequency.


The amplifier's front panel digital display shows forward and reflected output plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, 0 dBm input, VSWR protection, gain control, RF output sample port, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature.

Modular design of the power supply and RF components allow for easy access and repair. Use of a switching mode power supply results in significant weight reduction.

Housed in a stylish contemporary cabinet, this unit is designed for benchtop use but can be removed from the cabinet for rack mounting. The Model 200T2G4 provides readily available RF power for a variety of applications in Test and Measurement, (including EMC RF susceptibility testing), Industrial and University Research and Development, and Service applications.

See Model Configuration for package alternatives.

200T2G4 TYPICAL POWER OUTPUT

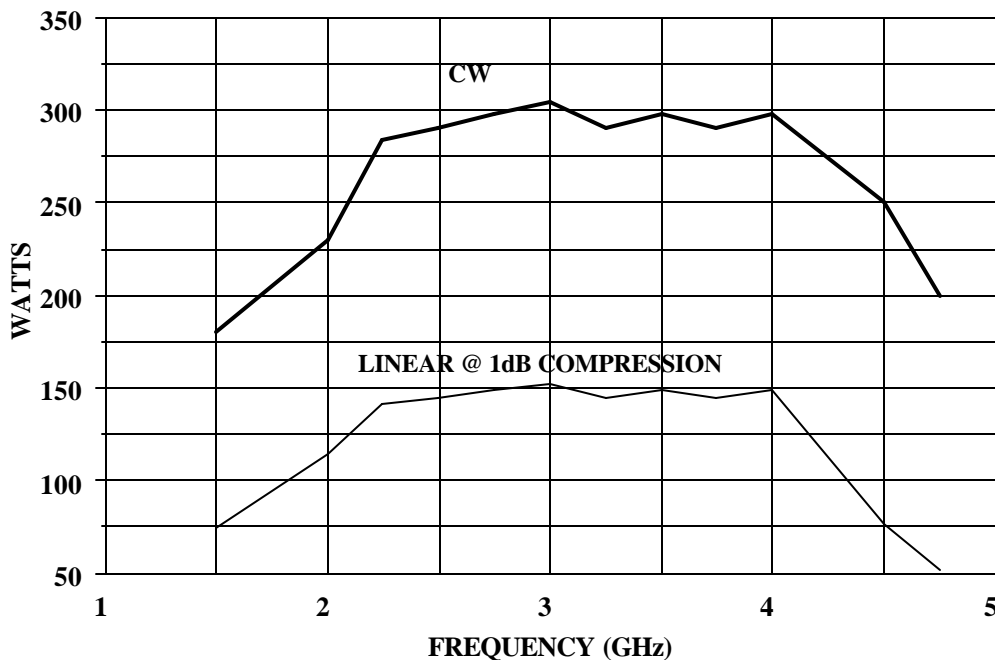

SPECIFICATIONS

Model 200T2G4

POWER (fundamental), CW, @ OUTPUT CONNECTOR

Nominal 283 watts
 Minimum..... 200 watts
 Linear @ 1 dB Compression..... 100 watts minimum

FLATNESS ± 7 dB maximum at rated power

FREQUENCY RESPONSE..... 2-4 GHz instantaneously

INPUT FOR RATED OUTPUT..... 1.0 milliwatt maximum

GAIN (at maximum setting)..... 53 dB minimum

GAIN ADJUSTMENT (continuous range)..... 35 dB minimum

INPUT IMPEDANCE..... 50 ohms, VSWR 2.0:1 maximum

OUTPUT IMPEDANCE..... 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE..... Output power foldback protection at reflected power exceeding 40 watts. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

MODULATION CAPABILITY..... Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal. AM peak envelope power limited to specified power.

NOISE POWER DENSITY..... Minus 66 dBm/Hz (maximum)
 Minus 77 dBm/Hz (typical)

HARMONIC DISTORTION Minus 4.5 dBc maximum, Minus 6.0 dBc typical

PRIMARY POWER 190-260 VAC
 50/60 Hz single phase
 2.0 KVA maximum

CONNECTORS

RF input..... Type N female on rear panel
 RF output..... Type N female on rear panel
 RF output sample port Type N female on rear panel
 GPIB..... IEEE 488 (f) on rear panel
 Interlock..... DB-15 (f) on rear panel

COOLING..... Forced air (self contained fans), air entry and exit in rear.

MODEL CONFIGURATION

Model Number	Description	Weight	Size (W x H x D)
200T2G4	With removable enclosure	64 kg (120 lb)	50.3 x 29.7 x 68.6 cm 19.8 x 11.7 x 27 in
200T2G4M1	Shipped without an outer cabinet	41 kg (90 lb)	48.3 x 26.7 x 68.6 cm 19.0 x 10.5 x 27 in
200T2G4M3	Enclosure removed for rack mounting, slides and front handles installed	43 kg (95 lb)	48.3 x 26.7 x 68.6 cm 19.0 x 10.5 x 27 in