



160 School House Road, Souderton, PA 18964-9990 USA
Phone 215-723-8181•FAX 215-723-5688

MODEL 250T1G3
M1, M2
250 WATTS CW
1 - 2.5 GHz

The Model 250T1G3 is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier designed for applications where instantaneous bandwidth and high gain are required. A reliable TWT provides a conservative 250 watts minimum at the amplifier output connector. Stated power specifications are at fundamental frequency.


The amplifier's front panel digital display shows forward and reflected output plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, 0dBm input, VSWR protection, gain control, external video pulsing, RF output sample port, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature.

Modular design of the power supply and RF components allow for easy access and repair. Use of a switching mode power supply results in significant weight reduction. The external video pulsing feature reduces prime power use for pulse applications.

Housed in a stylish contemporary cabinet this unit is designed for benchtop use, but can be removed from the cabinet for rack mounting. The Model 250T1G3 provides readily available RF power for a variety of applications in Test and Measurement, (including EMC RF susceptibility testing), Industrial and University Research and Development, and Service applications.

See Model Configuration for packaging alternatives.

250T1G3 TYPICAL POWER OUTPUT

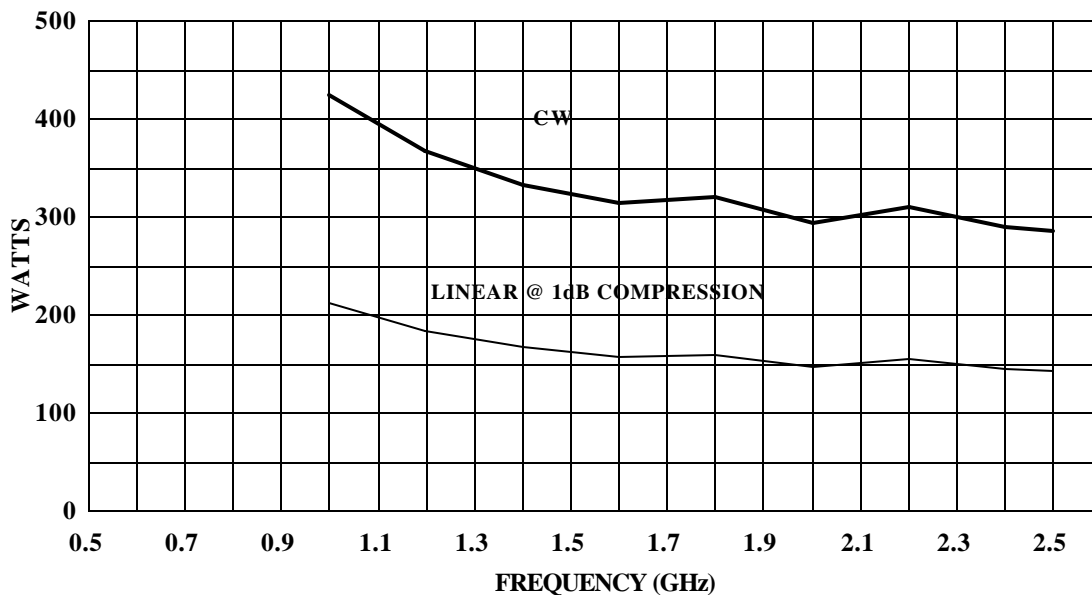

**SPECIFICATIONS
Model 250T1G3**

POWER (fundamental), CW, @ OUTPUT CONNECTOR

Nominal..... 300 watts
 Minimum..... 250 watts
 Linear @ 1 dB Compression 100 watts minimum

FLATNESS ±12 dB maximum, equalized for ±5 dB maximum at rated power

FREQUENCY RESPONSE..... 1-2.5 GHz instantaneously

INPUT FOR RATED OUTPUT..... 1.0 milliwatt maximum

GAIN (at maximum setting)..... 53 dB minimum

GAIN ADJUSTMENT (continuous range)..... 35 dB minimum

INPUT IMPEDANCE..... 50 ohms, VSWR 2.0:1 maximum

OUTPUT IMPEDANCE..... 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE..... Output power foldback protection at reflected power exceeding 50 watts
 Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

MODULATION CAPABILITY..... Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal. AM peak envelope power limited to specified power.

VIDEO PULSE CAPABILITY

Pulse Width..... 0.05 microseconds min
 Pulse Rate (PRF) 100KHz max
 RF Rise and Fall..... 30 ns max (10% to 90%)
 Delay 300 ns max from pulse input to RF90%
 Pulse width distortion ±30 ns max (50% points of output pulse width compared to 50% points of input pulse width)

NOISE POWER DENSITY (pulse on)..... Minus 72 dBm/Hz (maximum)
 Minus 77 dBm/Hz (typical)
 (pulse off)..... Minus 140 dBm/Hz (typical)

HARMONIC DISTORTION..... Minus 3 dBc maximum, Minus 4.5 dBc typical

PRIMARY POWER..... 190 – 260VAC
 50/60 Hz, single phase
 2.5 KVA maximum

CONNECTORS

RF input..... Type N female on rear panel
 RF output..... Type N female on rear panel
 RF output sample port..... Type N female on rear panel
 GPIB IEEE-488 (f)
 Interlock..... DB-15 female on rear panel
 Video BNC-female on rear panel

COOLING..... Forced air (self contained fans), air entry and exit in rear.

MODEL CONFIGURATIONS

Model Number	Description	Weight	Size (W x H x D)
250T1G3	With removable enclosure	59 kg (130 lb)	50.3 x 29.7 x 76.2 cm 19.8 x 11.7 x 30 in
250T1G3M1	Shipped without an outer cabinet	46 kg (100 lb)	48.3 x 26.7 x 76.2 cm 19.0 x 10.5 x 30 in
250T1G3M2	Enclosure removed for rack mounting - slides and front handles installed	48 kg (105 lb)	48.3 x 26.7 x 76.2 cm 19.0 x 10.5 x 30 in